

Tested to the requirements of ASTM D1970, E96, and E2178

Features and Components



Tri-laminate woven polyethylene, nonslip, UV-protected top surface: Provides temporary weather protection for up to 180 days (see Extended Exposure Guidelines). Provides high tensile strength and puncture resistance with low air and vapor permeability.

Self-adhering installation: Self-sealing, high-quality adhesive allows for quick installation without the use of additional adhesives or primers.

Increased coverage: 10 SQ roll (9.49 SQ net) coverage allows for less seams and rolls per job resulting in reduced waste and labor costs.

Low Temperature Installation: Excellent adhesive performance that can be applied at temperatures as low as 20°F (-6.7°C) provided product has been stored in recommended conditions.

Reduced Fire Load: Approved for use in select FM RoofNav assemblies in direct-to-deck applications over steel without the need for a thermal barrier.

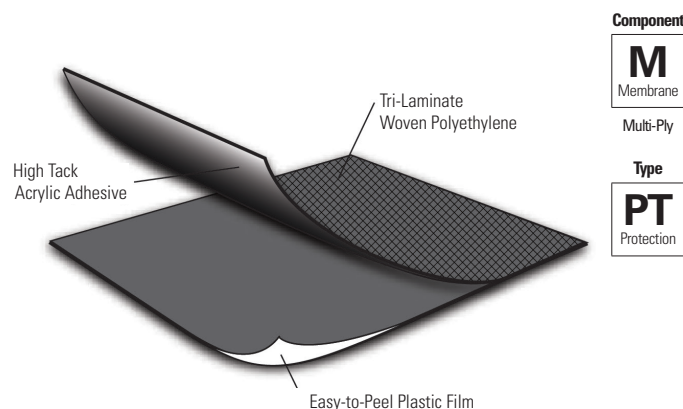

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA**	CA	HW	HA**	CA	HW	SA	MF	
									Compatible with all multi-ply systems*

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
										Compatible with all single ply systems*

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

* This product is compatible with all systems when used as a vapor barrier.

** Do not apply hot asphalt to this product.

Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used as a vapor barrier in most JM systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Storage

Rolls should remain in their original packaged condition until ready to install. Rolls should be stored indoors, out of direct sunlight, and kept clean and dry prior to use. Shelf life is approximately 12 months with proper storage conditions.

Installation/Application



Self-Adhered

- This product is not suitable for hot asphalt application to the top surface
- Can be installed on plywood, gypsum or concrete board, concrete or metal.
- Minimum application temperature is 20°F (-6.7°C) and rising. Roll should be stored >50°F (10°C) prior to application.
- Ideal for low-slope applications up to 3" per foot (7.5 cm/m) or 14°
- Side laps and end laps are 3" (7.62 cm)
- Refer to Vapor Barrier Installation Instructions for application information

Packaging and Dimensions

Roll Coverage*	949 ft² (88.1 m²)
Roll Length	200 ft (60.96 m)
Roll Width	60" (1.52 m)
Roll Weight	70 lb (31.75 kg)
Rolls per Pallet	30
Pallet Weight	2,260 lb (1,025 kg)
Pallets per Truck**	16

*Assumes a 3" side and end lap **Assumes 48' flatbed truck.



JM Vapor Barrier FR MAX

Polyethylene Surfaced, Self-Adhering Vapor Barrier

Tested to the requirements of ASTM D1970, E96, and E2178

Tested Physical Properties

Physical Properties		ASTM Test Method	Vapor Barrier FR Max	
			MD*	XMD**
Strength	Tear Resistance	D1970	105 lbf (467.1 N)	105 lbf (467.1 N)
	Tensile Strength	D5147	60 lbf/in. (10.5 kN/m)	70 lbf/in. (12.3 kN/m)
Longevity	Low Temp. Flexibility at -20.2°F	D1970	Pass	
	Thickness	D5147	14 mil (0.4 mm)	
	Elongation at Break at 73.4°F	D1970/D2523	30%	20%
Performance	Thermal Stability	D1970	Pass	
	Adhesion to Plywood at 73.4°F	D1970/D903	50 lbf	
	Adhesion to Plywood at 40°F	D1970/D903	90 lbf	
	Self-Sealability Around Nail	D1970	Pass	
	Self-Sealability of Side Lap	D1970	Pass	
	Moisture Vapor Permeance	E96	0.04 perm	
	Air Permeability	E2178	0.005 L/(s•m²)	
		E283	0.001 cfm/ft²	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Extended Exposure Guidelines

When used for temporary weather protection, all seams should be sealed with JM Single Ply LVOC Caulk. Membrane should not be exposed to ponding water conditions. Prior to assembling the remainder of the roofing system, an inspection of the exposed membrane should be conducted with repairs made as needed to replace any damage that may have occurred during extended exposures. Refer to the JM Vapor Barrier Field Guide for additional information.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.