

Features and Components

Extra High Load Fasteners are #21 fasteners with a #3 Phillips head. The point is designed for quick installation in new and re-roof applications. Extra High Load Fasteners are only compatible with Extra High Load Plates.

The Extra High Load Plate is a 3" (76.2 mm) diameter, Galvalume®*-coated steel plate with eye hooks. The Extra High Load Plate incorporates an oversized diameter hole to accommodate the larger wire size of the Extra High Load Fastener.

Use: Thermoplastic Membranes

Material: Extra High Load Fastener - Case-hardened steel
Extra High Load Plate - Galvalume-Coated Steel

Gauge: #21


Head: #3 Phillips head

Plate: 3" (76.2 mm) round

Color: Black (fasteners), Grey (plates)

Deck Types: Wood or 18 - 24 gauge (1.25 mm - 0.56 mm) Metal.

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

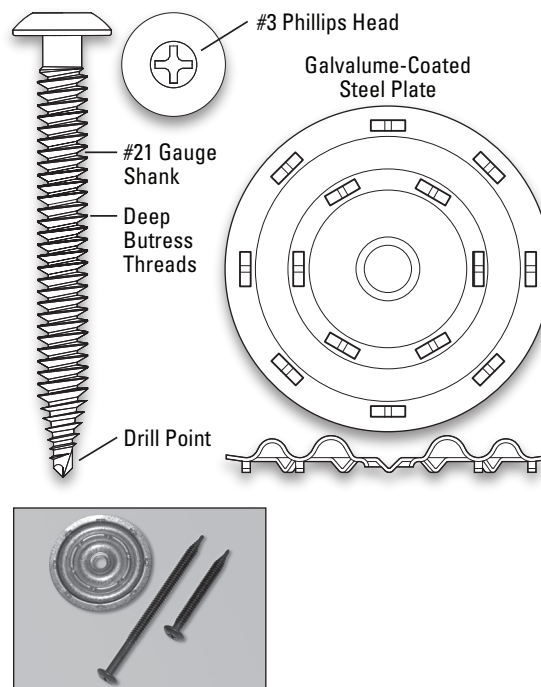

Component

F
Fastening

Type

M
Membrane
Single Ply

System Compatibility

This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR	APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF
Compatible with the selected multi-ply systems above								

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Do not use in single ply systems										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

The Extra High Load Fastener is compatible with the Extra High Load Plate only.

Steel deck: minimum 3/4" penetration

Wood deck: minimum 1" penetration

Packaging and Dimensions

Fastener Sizes	Quantity per Container*
2" to 3" (50.8 mm to 76.2 mm),	1,000/pail
4" to 6" (101.6 mm to 152.4 mm)	500/pail
7" to 10" and 12" (177.8 mm to 254 mm) and (304.8 mm)	250/pail
Plate Size	Quantity per Container
3" (7.6 cm) round	500/pail
Producing Locations**	Agawam, MA and Itasca, IL

* A bit is provided in each pail.

**The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.



EXTRA HIGH LOAD FASTENERS AND PLATES

Thermoplastic Membrane Fastener

Product Specifications

Product Description	Part Length		Shank Length		Thread Length	
	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)
EXTRA HIGH LOAD PHILLIPS 2" 1000/BOX	2	50.8	0	0	FULL	FULL
EXTRA HIGH LOAD PHILLIPS 3" 1000/BOX	3	76.2	0	0	FULL	FULL
EXTRA HIGH LOAD PHILLIPS 4" 500/BOX	4	101.6	1	25.4	3	76.2
EXTRA HIGH LOAD PHILLIPS 5" 500/BOX	5	127	1	25.4	4	101.6
EXTRA HIGH LOAD PHILLIPS 6" 500/BOX	6	152.4	2	50.8	4	101.6
EXTRA HIGH LOAD PHILLIPS 7" 250/BOX	7	177.8	3	76.2	4	101.6
EXTRA HIGH LOAD PHILLIPS 8" 250/BOX	8	203.2	4	101.6	4	101.6