

Features and Components

JM VSH Plates are 2.2" round heavy duty reinforced polymer plates with barbs utilized for in seam single ply membrane securement, and cover board preliminary securement of Very Severe Hail rated single ply membrane systems.

Use: Single Ply Membranes & Cover Boards


Material: High Strength Reinforced Polymer

Size: JM VSH Plate - 2.2" (5.588 cm) round

Color: Black

DensDeck® StormX™ Prime VSH Plate Securement

The JM VSH Plate must be properly driven into the DensDeck StormX Prime Roof Board without over-driving or under-driving the fastener. Over-driving the fastener can cause "mushrooming" of the steel deck.



JM VSH Plate



Component


F
Fastener

Type

M
Membrane

C
CoverBoard

Single Ply

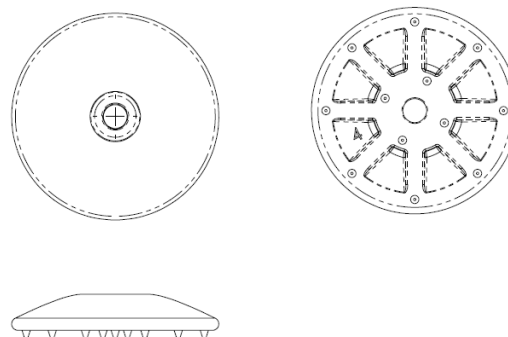

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	CA	MF
	Compatible with the selected Multi-Ply system above								

Single Ply	TPO		PVC		EPDM			
	MF	FA	MF	FA	MF	FA	BA	
Compatible with the selected Single Ply systems above								

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals*




*Fastener approvals are based on system approvals

Installation/Application

- Refer to the application instructions guidelines for proper utilization of this product.
- Ballasted PV assemblies are NOT allowed on TPO roof systems using VSH plates. As an alternative to ballasting the PV array, JM recommends that the PV array be mounted to the building structure. The mounting apparatus can then be flashed (waterproofed) in accordance with JM-approved details.

Product	Size	Packaging
JM VSH Plate	2.2" (5.588 cm) round	500/pail
Producing Location	Agawam, MA	
Stocking Location	Scottsboro, AL	Hillsboro, TX

JM Coverboard Minimum Pre-securement Pattern when used with a Mechanically Fastened Membrane

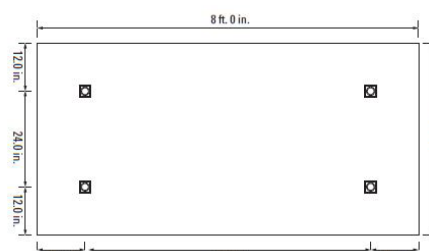

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.