

### Features and Components

**UltraFast Plastic Plates** are 3" (7.62 cm) round, high strength polypropylene plates with a special locking feature.

**UltraFast Metal Plates** are 3" (7.62 mm) round or square, premium Galvalume®\*-coated steel metal plates.

**Use:** Insulation and Cover Boards


**Material:** Plates - Galvalume-Coated Steel or High Strength Polypropylene

**Gauge:** 26 Gauge Steel

**Plates:** 3" (7.62 cm) Round Plastic & Round or Square Metal

**Colors:** Grey (metal plates), Blue (plastic plates)

\* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

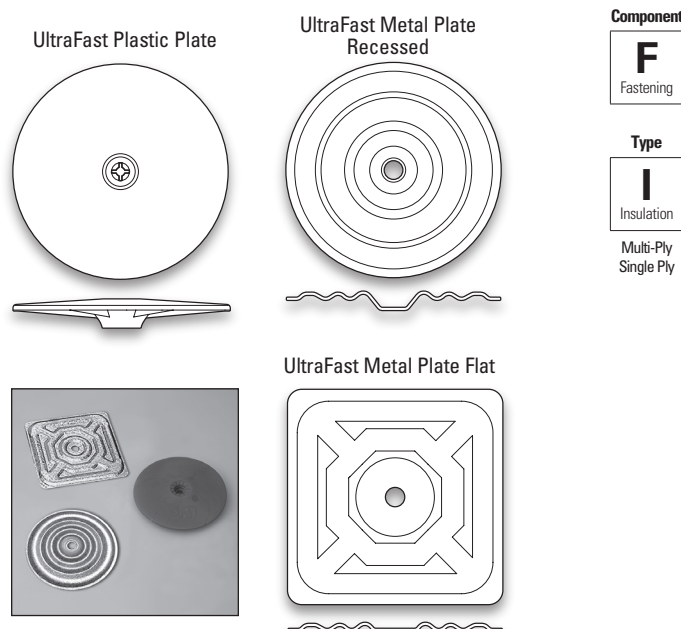

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

| Multi-Ply                                         | BUR |    | APP |    | SBS |    |    |    |    |
|---------------------------------------------------|-----|----|-----|----|-----|----|----|----|----|
|                                                   | HA  | CA | CA  | HW | HA  | CA | HW | CA | MF |
| Use to fasten Insulation in all Multi-Ply systems |     |    |     |    |     |    |    |    |    |

| Single Ply                                                        | TPO |    | PVC |    | EPDM |    |    |
|-------------------------------------------------------------------|-----|----|-----|----|------|----|----|
|                                                                   | MF  | FA | MF  | FA | MF   | FA | BA |
| Use to fasten Insulation in the selected Single Ply systems above |     |    |     |    |      |    |    |

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Energy and the Environment

|                  |                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------|
| Recycled Content | This steel based product contains a minimum of 25% post consumer recycled materials by weight |
|------------------|-----------------------------------------------------------------------------------------------|

### Peak Advantage® Guarantee Information

|                                                   |
|---------------------------------------------------|
| Systems                                           |
| Approved to use with any Peak Advantage Guarantee |

### Codes and Approvals\*



\*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/roofing](http://www.jm.com/roofing). The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

### Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

**Flat Bottom Plates (UltraFast Metal Plate Flat):** Approved for high density cover boards, 80 psi and higher.

**Recessed Plates (UltraFast Plastic Plate & UltraFast Metal Plate Recessed):** Approved for lower density substrates such as ENRGY 3® Insulation.

### Packaging and Dimensions

| Plate Sizes                                                     | Quantity/Container        |
|-----------------------------------------------------------------|---------------------------|
| 3" Metal Flat or Recessed, 1,000/pail<br>3" Plastic, 1,000/pail | 1,000/pail                |
| Producing Locations*                                            | Agawam, MA and Itasca, IL |

\* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).