

Features and Components

JM TPO RhinoPlate is a 3" (76.2 mm) round specially coated Galvalume®* plate with a recessed center and raised flat bonding surface. The JM TPO RhinoPlate is a roof attachment system that uses heat induction technology.

Use: Insulation and TPO Membranes

Material: Specially Coated Galvalume

Plate: 3" (7.6 cm) round


Color: Amber

Deck Type: Wood, Steel, Structural Concrete, or Structural Purlins

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

Fastener Compatibility

Designed to be used with Johns Manville High Load Fasteners

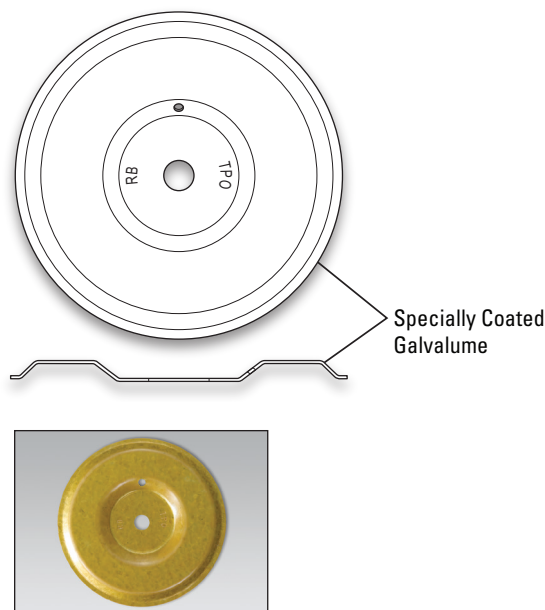

Component

F
Fastening

Type

I
Insulation

M
Membrane

Single Ply

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	
Compatible with the selected multi-ply systems above									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Compatible with the selected Single Ply systems above										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in 60 to 80 mil JM TPO systems*	30 years

* Approved to use with any Peak Advantage Guarantee.

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

Refer to the application instructions guidelines for proper utilization of this product.

Packaging and Dimensions

Plate Size	Quantity per Container
3" (7.6 cm) round	500/pail
Producing Locations*	Agawam, MA and Itasca, IL

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.

The JM RhinoPlate System is based on the RhinoBond® Induction Welding System. RhinoBond® is a registered trademark of OMG, Inc., and is patent protected.