

Features and Components

JM isoweld is 3.12" (79.2 mm) round G-90 steel plate with a flat bonding surface of proprietary TPO or PVC adhesive coating. Utilizing induction weld technology, JM isoweld simultaneously fastens the insulation and membrane.


Use: Insulation, TPO and PVC Membranes

Material: G-90 steel with proprietary coating

Plate: 3.12" (7.9 cm) round

Color: TPO = Yellow, PVC = Purple

Deck Type: Wood, Steel, or Structural Concrete

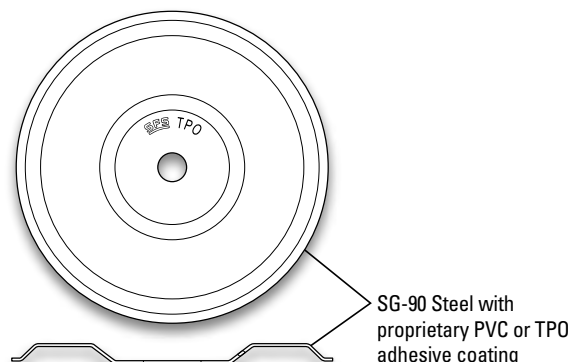

Component

F
Fastening

Type


I
Insulation

M
Membrane

Single Ply

Fastener Compatibility

Designed to be used with JM #15 Dekfast Fasteners.

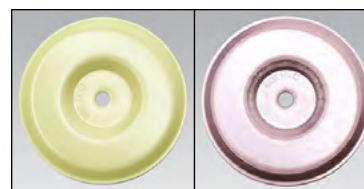

TPO

PVC

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA	CA	HW	CA	MF
Do not use in Multi-Ply systems									

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Use to fasten Insulation and Membranes in TPO & PVC Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in 60 to 80 mil JM TPO systems*	20 years

* Approved to use with any Peak Advantage Guarantee.

Codes and Approvals*



*Fastener approvals are based on system approvals

Installation/Application

- Refer to the application instructions guidelines for proper utilization of this product.
- Install the JM isoweld® with the SFS isoweld® 3000 induction tool. Obtain the the isoweld® 3000 tool directly with SFS at 317-457-7312 or brian.buckler@sfs.biz

Packaging and Dimensions

Plate Size	Quantity per Container
3.12" (7.9 cm) round	500/pail
Producing Locations*	See note

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.

Refer to the Safe Use Instructions and product label prior to using this product. The Safe Use Instructions are available by calling (800) 922-5922 or on the Web at www.jm.com/roofing.

The JM isoweld® system is based on the SFS isoweld®. isoweld® is a registered trademark of SFS intec.