

Features and Components

Polymer Batten Strips are 1" (2.54 cm) wide, approximately .050" (1.27 mm) thick, plastic strips, prepunched 6" (15.24 cm) on center.

Anchor Bars are 1" (2.54 cm) wide, prepunched and counter-sunk, Galvalume®*-coated steel strips typically used for supplemental anchoring of membranes in perimeter and corner zones of the roof.


Use: Single Ply Membranes

Materials: Battens - Polymer
Anchor Bars - Galvalume-Coated Steel

Color: Battens - White
Anchor Bars - Grey

Deck Types: Steel, Wood and Structural Concrete

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

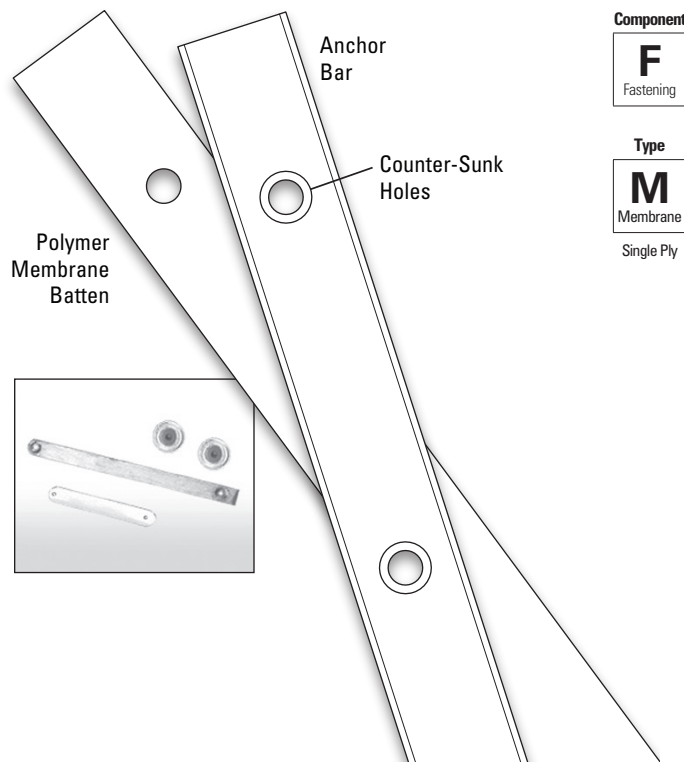

Component



Type



Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems
Approved to use in any Peak Advantage Guarantee

Codes and Approvals*



*Fastener approvals are based on system approvals

Installation/Application

Polymer Batten Bar: dispense from the carton. Install in straight lines by anchoring one end and extending bar to 25-ft. or so, then anchoring again. Set fastener head flush with batten bar. Do not overdrive.

Anchor Bar: Use appropriate fastener. Set fastener head flush with anchor bar.

Packaging and Dimensions

Item	Sizes	Length/Container
Polymer Batten Strip	1" (2.54 cm) wide .05" (1.27 mm) thick	250' (76.2 m)/carton
Anchor Bars	1" (2.54 cm) wide 10' (3.05 m) length	500'/carton
Producing Locations*	Agawam, MA and Itasca, IL	

* The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.