

Features and Components

Polymer Auger Fasteners are glass-reinforced nylon fasteners with an internal 1/4" (6 mm) square drive. Polymer Auger Fasteners have a 1" (25.4 mm) diameter head.

Polymer Auger Fasteners are available with Galvalume®-coated, metal stress plates, designed to lock into the fastener head.

Use: Insulation and Membranes

Material: Fasteners - Polymer
Plates - Galvalume-Coated Steel

Gauge: 0.675" Diameter Screw


Head: 1" (25.4 mm) Diameter, 1/4" (6 mm) Square Drive

Plates: 2" (50.8 mm) or 3" (76.2 mm) Round

Color: Black (fasteners), Grey (plates)

Deck Types: Cementitious Wood Fiber or Gypsum

* Galvalume is a registered trademark of BIEC International, Inc. and some of its licensed producers.

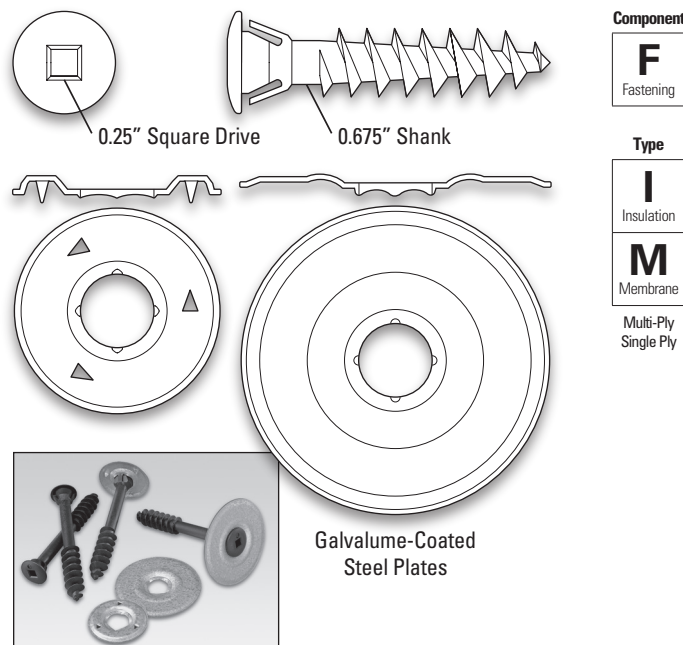

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP			SBS				
	HA	CA	HW	HA	CA	HW	SA	MF		
Use to fasten insulation in all multi-ply systems										

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
Use to fasten membranes and insulation in single ply systems										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

Energy and the Environment

Recycled Content	This steel based product contains a minimum of 25% post consumer recycled materials by weight
------------------	---

Peak Advantage® Guarantee Information

Systems
Approved to use with any Peak Advantage Guarantee

Codes and Approvals*



*Fastener approvals are based on system approvals

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.

Installation/Application

Polymer Auger fasteners can be installed into some cementitious wood fiber decks without pre-drilling. A pilot hole is required for gypsum. Use pull-out tests to determine required pilot hole size, typically 7/16", 1/2" or 9/16". Pilot holes must be a minimum of 1/2-in. deeper than embedment. Install fasteners using a heavy duty variable speed screw gun.

Installation at a low rpm is recommended. Minimum fastener embedment into the deck should be 1 1/2 in. (2 in. recommended). The Polymer Auger fastener should never penetrate the underside of the deck.

Packaging and Dimensions

Fastener Sizes	Quantity/Container*
2" to 7.5" (63.5 mm to 190.5mm)	500/pail
8" to 11" (203.2 mm to 279.4 mm)	250/pail
Plate Sizes	Quantity/Container
2" (50.38 mm) round and 3" (76.2 mm) round	1,000/pail
Producing Locations**	Agawam, MA and Itasca, IL

* A bit is provided in each pail.

** The point of manufacture for fasteners and plates varies depending on the specific part. Call your local JM sales professional for assistance.



POLYMER AUGER FASTENERS AND PLATES

Solid Glass-Reinforced Nylon Fasteners

Product Specifications

Product Description	Part Length		Shank Length		Thread Length	
	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)
POLYMER AUGER FASTENER 2.5" 500/BX	2.5	63.5	1	25.4	1.5	38.1
POLYMER AUGER FASTENER 3" 500/BX	3	76.2	0.75	19.1	2.25	57.15
POLYMER AUGER FASTENER 3.5" 500/BX	3.5	88.9	1.25	31.75	2.25	57.15
POLYMER AUGER FASTENER 4" 500/BX	4	101.6	1.75	44.5	2.25	57.15
POLYMER AUGER FASTENER 4.5" 500/BX	4.5	114.3	2.25	57.2	2.25	57.15
POLYMER AUGER FASTENER 5" 500/BX	5	127	2.75	69.9	2.25	57.15
POLYMER AUGER FASTENER 5.5" 500/BX	5.5	139.7	3.25	82.6	2.25	57.15