

**High-Density layer meets the requirements of ASTM C 1289, Type II, Class 4, Grade 1**  
**Standard-Density layer meets the requirements of ASTM C 1289, Type II, Class 2**  
**Currently no ASTM designation for this composite.**


### Features and Components

**High-Density ProtectoR HD:** Provides a high compressive strength protective layer for insulation while working with the membrane above to ensure maximum performance and longevity.

**Standard-Density Foam (ENRGY 3 CGF):** Closed cell polyisocyanurate foam manufactured inline to create a homogeneous board with ProtectoR HD and coated glass facers.

**Inorganic Coated Glass Facers:** (With no cellulose) Provide improved resistance to mold growth, as well as a smooth surface that performs well with self-adhering systems, and efficient adhesive application in fully adhered single ply systems.

**Cost Savings:** Installation labor savings by combining cover board and insulation into a single board. Eliminates adhesive cost to adhere cover board to insulation.

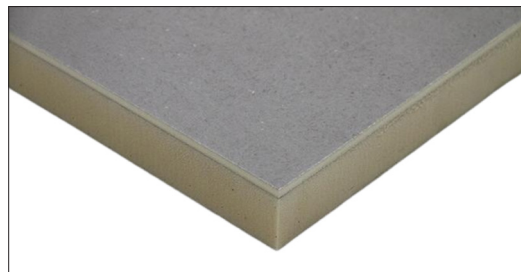

#### Component

**I**  
Insulation

Multi-Ply  
Single Ply

#### Type

**HT**  
High Thermal

**CP**  
Composite

**HD**  
High Density

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

| Multi-Ply | BUR |    | APP |    | SBS |    |    |    |                                                      |
|-----------|-----|----|-----|----|-----|----|----|----|------------------------------------------------------|
|           | HA  | CA | HW  | HA | CA  | HW | SA | MF |                                                      |
|           |     |    |     |    |     |    |    |    | Compatible with the selected multi-ply systems above |

| Single Ply | TPO |    |    |    | PVC |    |    | EPDM |    |                                                       |
|------------|-----|----|----|----|-----|----|----|------|----|-------------------------------------------------------|
|            | MF  | AD | SA | IW | MF  | AD | IW | MF   | AD | BA                                                    |
|            |     |    |    |    |     |    |    |      |    | Compatible with the selected single ply systems above |

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

### Energy and the Environment

|                                                                                                                                      |                  |                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------------------------------------------------------------------|
| LEED®                                                                                                                                | Recycled Content | Varies with thickness, see <i>Product Data and Packaging</i> table on back page. |
| Produced with environmentally compliant pentane blowing agent with zero ozone depletion (conforms to the Montreal Protocol of 1987). |                  |                                                                                  |

### Peak Advantage® Guarantee Information

|                                                          |
|----------------------------------------------------------|
| Systems                                                  |
| For use in approved JM Peak Advantage Roofing Guarantees |

### Codes and Approvals



**PIMA**  
QualityMark™  
Independent | Certified | LTTR +

- FM® Standards 4450/4470 Approvals (refer to FM RoofNav™)
- UL® Standard 790, 263 and 1256 (refer to UL Roofing Materials system directory)
- Third-party certification with the PIMA Quality Mark™ for Long-Term Thermal Resistance (LTTR) values

### Installation/Application



Urethane  
Adhesive



Mechanically  
Fastened

Refer to the insulation application instructions guidelines for proper utilization of this product.

### Packaging and Dimensions

|                                  |                                |              |
|----------------------------------|--------------------------------|--------------|
| Standard Sizes <sup>1</sup>      | 48" x 48"<br>(1.22 m x 1.22 m) |              |
| Pallet per Truck <sup>2</sup>    | 48                             |              |
| Producing Locations <sup>3</sup> | Bremen, IN                     | Hazleton, PA |

1. For available thicknesses, see *Product Data and Packaging* table on back side of this data sheet. Contact your JM Sales Representative for details.

2. This product requires a min. half truckload order quantity.

3. This product is only available as a made-to-order item and as such, a minimum of a 4-6 week lead time should be anticipated.

### Typical Physical Properties

| Test         |                                                             | ASTM   | Values                                   |
|--------------|-------------------------------------------------------------|--------|------------------------------------------|
| Strength     | Tensile Strength                                            | C 209  | 500 psf (24 kPa) <i>(min)</i>            |
|              | Compressive Strength (top), psi (kPa)                       | D 1621 | Grade 1 - 109 psi (751 kPa) <i>(max)</i> |
|              | Compressive Strength, (bottom) @ 10% Deformation            | C 1621 | 20 psi (138 kPa) <i>(min)</i>            |
|              | Dimensional Stability, % Linear Change, <i>(nom)</i>        | D 2126 | 0.5%                                     |
| Moisture     | Moisture Vapor Permeance, perm (ng/(Pa*s*m2)), <i>(max)</i> | E 96   | <1.5 perm, 85.8 ng/(Pa*s*m²)             |
|              | Water Absorption, % by vol                                  | C 209  | 4.0 <i>(max)</i>                         |
|              | Resistance to Mold                                          | D 3273 | Pass (10)                                |
| Installation | Service Temperature                                         | D 1623 | -100°F to 250°F (-73°C to 121°C)         |
|              | Flame Spread each layer, <i>(foam core)</i>                 | E 84   | 20 - 30 <i>(nom)</i>                     |
|              | Smoke Developed, <i>(foam core)</i>                         | E 84   | 55 - 250 <i>(nom)</i>                    |

### Product Data and Packaging

| Thickness |       | Long-Term Thermal Resistance (LTTR) Values <sup>1</sup> | Total Recycled Content <sup>2</sup> | Boards/Pallet | Square Feet/Pallet | Pallets/Truck <sup>3</sup> |
|-----------|-------|---------------------------------------------------------|-------------------------------------|---------------|--------------------|----------------------------|
| in.       | mm    | (hr•ft <sup>2</sup> •°F)/BTU                            | (all pre-consumer)                  | 4x4           | 4x4                | 4x4                        |
| 2.0       | 50.8  | 11.1                                                    | 6.87%                               | 24            | 384                |                            |
| 2.5       | 63.5  | 13.9                                                    | 7.57%                               | 19            | 304                |                            |
| 2.7       | 68.6  | 15.1                                                    | 7.69%                               | 17            | 272                |                            |
| 3.0       | 76.2  | 16.9                                                    | 8.09%                               | 16            | 256                |                            |
| 3.5       | 88.9  | 19.9                                                    | 8.62%                               | 13            | 208                |                            |
| 4.0       | 101.6 | 23.0                                                    | 8.99%                               | 12            | 192                |                            |

1. The Long-Term Thermal Resistance (LTTR) values were determined in accordance with CAN/ULC S770 at 75°F (24°C). The ultimate R-Value of these products will depend on individual installation circumstances. 2. Value represents average results. 3. Assumes 48' flatbed truck.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/roofing](http://www.jm.com/roofing). The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).