

Aircraft Design 1 - Fall 2024

Assignment 1

Smythe Cy Goforth Jr, Matthew Burnett
Group 6

Instance: [first delivery]

Hours spent on assignment: [35]

Aircraft Type: UAV

Aircraft Number: Glider UAV Project

Reference Type	Value	Unit
Payload	2	kg
Range	100	km
Altitude	121.92	m
Cruise Speed	10	m/s
Ceiling	1219.2	m
Endurance	3	Hours
Max Speed	15	m/s

Table 1: Basic Aircraft Specifications

Contents

1	Introduction	3
2	Mission Definition and Analysis of Requirements	3
2.1	The Mission	3
2.2	Requirement Analysis	4
2.2.1	Payload Analysis	4
2.2.2	Propulsion Analysis	4
2.2.3	Certification Analysis	5
2.2.4	Range, Takeoff, and Landing Distance	5
2.2.5	Additional Requirements	5
2.3	Driving Requirements	5
3	Reference Aircraft Data Collection	5
4	Concept Generation and Selection	5
4.1	Concept Generation	5
4.1.1	Mono-pusher with Inverted V-tail	6
4.1.2	Dual Pusher with V-tail	6
4.1.3	Dual Puller with Cross-tail	6
4.2	Concept Selection	6
A	Appendix A: Reference Aircraft Data	7

1 Introduction

The following report consists of 5 chapters, each guiding the reader through the aircraft design process. This first chapter will provide a definite mission for the aircraft and will analyze its design requirements. The second chapter will analyze reference aircraft similar in specifications to those required by the design mission, as well as include an appendix with the relevant reference material. Chapter 3 discusses the concept generation for the aircraft design and details the process of selection between the three concepts we created, and how the selected concept best meets the mission requirements. Chapter 4 will show the complete fuselage layout for the aircraft. Chapter 5 will contain technical drawings of the concept aircraft design.

2 Mission Definition and Analysis of Requirements

In the introduction, the basic requirements for a Low Altitude High Endurance UAV (LAHE UAV) were given. This chapter will explore FAA requirements for low-altitude UAV systems, payload specifications, and necessary design considerations.

2.1 The Mission

The mission for the LAHE UAV is centered around observation. The aircraft will be launched by a single operator in a remote environment, climbing to a cruise altitude of 400 meters and maintaining a cruise speed of 10 m/s. Once the cruise altitude is reached, the aircraft will enter the observation phase, utilizing a microphone sensor package to survey wildfires. The mission continues until endurance is exhausted, followed by a return to the operator, and a controlled descent and landing.

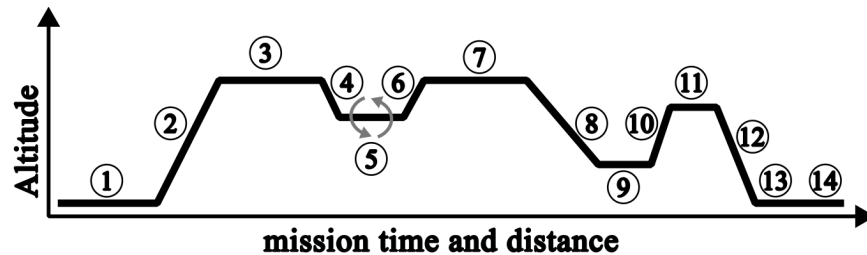


Figure 1: Technical drawings: top, side, and front views of the fuselage

1. **Start Motor/s and Takeoff:** The LAHE UAV will be launched via a catapult system using an internal lithium-ion battery to power its electric motor, allowing for rapid deployment in remote environments.
2. **Climb to Cruise Altitude:** The UAV will climb to 400 feet at a low angle of attack to avoid stalling due to the glider airfoil design.
3. **Cruise to Survey Area:** Upon reaching cruise speed and altitude, the UAV will travel to the survey area.

4. **Descend to Survey Area:** The UAV will begin its descent to the survey area while carefully managing its angle of attack to prevent stalling.
5. **Loiter at Survey Area:** Once at the desired altitude, the UAV will alternate between powered flight and gliding while deploying its microphone sensor to gather data.
6. **Ascend Back to Cruise Altitude:** After completing the loiter phase, the UAV will ascend back to its cruise altitude for the return trip.
7. **Cruise Back to Landing Zone:** The UAV will travel back to the designated landing area, maintaining its cruise speed and altitude.
8. **Descend to Landing Zone:** The UAV will descend steadily with a minimal angle of attack to prepare for landing.
9. **Attempt Landing:** The UAV will attempt a soft landing by reducing its power and using a gliding approach.
10. **Abort Landing if Necessary:** If conditions are not suitable, the UAV will abort its landing attempt and return to loiter over the landing zone.
11. **Loiter Over Landing Zone:** The UAV will loiter and circle over the landing area, waiting for optimal landing conditions.
12. **Final Descent for Landing:** After loitering, the UAV will perform a final descent with precision control.
13. **Landing:** The UAV will land with fixed gear.
14. **Power Off and Recover Equipment:** After landing, the UAV will power down, and the sensor equipment is recovered.

2.2 Requirement Analysis

2.2.1 Payload Analysis

The UAV's payload consists of a microphone listening package. This microphone must be exposed outside the fuselage, increasing drag and requiring a longer wingspan. The fuselage must also include an access panel for data recovery.

2.2.2 Propulsion Analysis

With a proposed cruise speed of 10 m/s and a payload of 2 kg, the propulsion will be provided by a brushless electric motor. A balance between motor weight and torque output is necessary.

2.2.3 Certification Analysis

According to FAA regulations, the UAV must weigh under 55 pounds, fly within visual line of sight (within 3 miles), and under 400 feet of altitude, among other requirements [1].

2.2.4 Range, Takeoff, and Landing Distance

The UAV must cover a range of 100 km. Its endurance will be extended through efficient gliding, with minimal battery power used for propulsion.

2.2.5 Additional Requirements

Other requirements include minimizing power consumption, maximizing endurance, and maintaining FAA certification.

2.3 Driving Requirements

The critical requirements for the UAV design include range, endurance, and payload capacity, all of which influence the motor choice.

3 Reference Aircraft Data Collection

A range of reference aircraft were studied for inspiration and comparison. These references will provide insight into design challenges and solutions. The full reference list is included in Appendix A.

4 Concept Generation and Selection

4.1 Concept Generation

Three design concepts were considered:

- Mono-pusher with inverted V-tail
- Dual pusher with V-tail
- Dual puller with cross-tail

Each concept was designed with a similar internal fuselage layout, while varying in motor and tail configurations.

4.1.1 Mono-pusher with Inverted V-tail

Inspired by the Bayraktar TB2, this design features a single rear-facing motor and inverted V-tail.

Pros:

- Higher endurance due to reduced weight
- Improved structural rigidity

Cons:

- Increased risk of stall
- Reduced stability due to inverted V-tail

4.1.2 Dual Pusher with V-tail

Inspired by the Piaggio P.180 Avanti and MQ-9 Reaper, this concept uses twin rear-facing motors and a V-tail.

Pros:

- Increased propulsion power
- Redundancy with dual motors

Cons:

- Increased weight and drag
- Tail turbulence from props

4.1.3 Dual Puller with Cross-tail

Inspired by the Bayraktar Akıncı, this design features twin forward-facing motors and a cross-tail.

Pros:

- Higher prop efficiency
- Tail out of turbulent airflow

Cons:

- Increased weight and drag
- Third tail surface increases drag

4.2 Concept Selection

The Mono-pusher with inverted V-tail was selected due to its superior endurance, reduced weight, and compact design. Though it presents challenges with stability at high angles of attack, these risks are mitigated by the aircraft's glider design and low cruise speed.

A Appendix A: Reference Aircraft Data

References

- [1] FAA, "14 CFR Part 48," https://www.faa.gov/air_traffic/publications/atpubs/aim_html/chap11_section_2.html, 2023.