

Multiple Drones Coordination

Project Members (Group 32)

Brenden Martins

bmartins2013@fau.edu

Matthew Wyatt

mwyatt2023@fau.edu

Matthew Paternoster

mpaternoster2022@fau.edu

Tarek Kayali

tkayali2023@fau.edu

Tutku Gizem Guder

tguder2021@fau.edu

Advisor (Sponsor)

Xiangnan Zhong

xzhong@fau.edu

Florida Atlantic University
Department of Electrical Engineering and Computer Science
Fall 2024

Project Summary:

Disaster scenarios such as hurricanes and power outages create challenges for emergency response, including the inability to quickly locate and assist affected individuals. The purpose of this project is to develop a multi-drone coordination system within a realistic 3D simulation environment to enhance target detection and disaster response efficiency. This system will enable effective testing and validation of algorithms to improve rescue operations, scientific research, and future real-world deployments.

Table of Contents

| | | |
|--------|----------------------------------|-----|
| 1. | Introduction | p.3 |
| 1.1. | Problem Description | p.3 |
| 1.2. | Significance of Problem | p.3 |
| 1.3. | Goals and Objectives | p.4 |
| 1.4. | Literature Review | p.5 |
| 2. | Proposed Design | |
| 2.1. | Project Requirements | |
| 2.1.1. | Functional Requirements | |
| 2.1.2. | Usability Requirements | |
| 2.1.3. | Safety Requirements | |
| 2.2. | Product Design | |
| 2.2.1. | Mechanical and Electrical Design | |
| 2.2.3 | Material Selection | |
| 2.2.4 | Engineering Design Requirements | |
| 2.3. | Block Diagram | |
| 2.4. | System State Diagram | |
| 2.5. | Subsystem State Diagram | |
| 2.6. | Requirements Mapping Table | |
| 3. | Implementation | |

- 3.1. Hardware Components
- 3.2. Software Components
 - 3.2.1. Communication Protocols
 - 3.2.2. Algorithms and Languages Used
 - 3.2.3. Airsim Configuration
- 4. Development Plan and Schedule
 - 4.1. Outline of the Plan
 - 4.2. Work Breakdown Schedule and Key Milestones
 - 4.3. Budget Overview
- 5. References

1. Introduction

1.1. Problem Description

In the face of disasters, humanity grapples with the limits of our control, striving to coordinate efforts amidst chaos while contending with the unpredictable forces of nature and circumstance. Natural and man-made disasters are not only devastating in the moment but also have dire implications afterwards which present first responders with significant challenges. Among these challenges are locating victims and would be victims, coordinating rescue missions, and monitoring hazardous areas, all in real-time. These challenges are also time sensitive, so the quicker these issues can be addressed, the higher the possibility for a better outcome. The disasters range from, but aren't limited to, earthquakes, floods, hurricanes, and building collapses that leave many people's lives in danger. Traditional methods of disaster response often rely on limited human resources and equipment, leading to delays, inefficiencies, and increased risk to personnel.

With the exponential advancements in technology, unmanned aerial vehicles (UAVs), commonly known as drones, have emerged as a powerful tool for enhancing disaster response efforts. However, most existing systems focus on individual drone operations, lacking the advanced coordination required for multi-drone teams to perform complex tasks such as collaborative searches, real-time monitoring, and target detection. The possibilities that exist in reducing casualties and more with the use of drones, have already been clearly documented and shown to be effective. This is what the United Nations Development Programme's Disaster Risk Reduction Programme Analyst, Duong Van Hung, wrote on the issue:

The use of drones to assess damage after disasters has been adopted by many countries. Drones have proven their outstanding strength when assessing damage to facilities, houses, fields, and the likes after storms, floods and other disasters. Drones also provide concrete and clear evidence immediately after the assessment. In Viet Nam, UNDP has equipped drones and organized drone training courses for six central provinces from 2022. Each province has set up a group of provincial experts who are regularly updated and provided with technical support. These drones enable experts to assess damage to infrastructure, houses, fields, and more with unparalleled efficiency. The immediate and concrete evidence collected by drones facilitates accurate analysis and informed decision-making. [1]

1.2. Significance of Problem

Disaster response is a critical area where delays or inefficiencies can mean the difference between life and death. As disasters increase in frequency and scale due to factors such as climate change, urbanization, and geopolitical instability, traditional methods of emergency response face growing challenges. Among the most pressing challenges are:

Human Safety and Resource Limitations:

First responders often put themselves at great personal risk while operating in hazardous environments. Navigating collapsed structures, floodwaters, or fire-affected zones exposes them to immediate physical dangers, while their ability to locate and rescue victims is constrained by limited time and resources. These limitations not only slow response times but also reduce the scope of possible interventions, leaving many victims unaided in critical moments.

Inefficient Real-Time Monitoring

Monitoring hazardous areas in real-time is essential during disasters, but it remains an ongoing challenge. Traditional systems rely on status surveillance equipment, manual reconnaissance, or satellite imaging, all of which suffer from delays, blind spots, or insufficient resolution for precise decision-making. The inability to continuously track evolving risks, such as spreading wildfires, structural collapses, or rising floodwaters, hampers the effectiveness of disaster response.

Lack of Scalable and Coordinated Solutions

As disasters grow in scale, so too does the complexity of responding effectively. Coordination between multiple teams and equipment becomes exponentially harder to manage in large-scale events. Traditional methods often lack scalability, leaving response teams ill-equipped to handle widespread damage or simultaneous crises.

These aren't the only challenges that exist but with our coordinated efforts, these challenges can be addressed efficiently and effectively with our MDCS.

1.3. Goals and Objectives

The Multi-Drone Coordination System project is designed to address critical gaps in disaster response through the development and deployment of coordinated UAV technology. This system aims to enhance the speed, safety, and

effectiveness of emergency operations, providing tools that can adapt to dynamic, high-stakes environments. The following goals and objectives define the scope and purpose of the project:

1.3.1. Project Goals

1.3.1.1. Enhance Disaster Response Operations:

- Develop a system that allows multiple drones to collaborate in real-time for tasks such as victim identification, hazard monitoring, and resource delivery.
- Reduce response times and improve operational outcomes by enabling drones to take over high-risk or time-sensitive tasks.

1.3.1.2. Integrate Advanced Technologies:

- Leverage state-of-the-art algorithms, machine learning, and real-time communication protocols to ensure seamless drone operation.
- Implement intuitive interfaces to support both automated and user-guided drone control.

1.3.1.3. Improve Safety for First Responders:

- Minimize human risk by deploying drones for reconnaissance and hazardous environment exploration.
- Provide first responders with accurate, real-time information to facilitate safer decision-making.

1.3.1.4. Foster Scalable Solutions:

- Design a system capable of adapting to disasters of varying magnitudes, from localized incidents to widespread crises.
- Ensure interoperability with existing disaster response protocols and infrastructure.

1.3.2. Project Objectives

1.3.2.1. Simulation Environment Development:

- Build a realistic 3D simulation environment in Microsoft AirSim to model disaster scenarios, complete with terrain, weather conditions, and obstacles
- Validate system functionality in controlled, repeatable simulations before real-world application.

1.3.2.2. Multi-Drone Coordination Algorithms:

- Design and implement algorithms for task allocation, real-time communication, and collision avoidance among multiple drones.
- Optimize algorithms for efficiency and reliability in dynamic and unpredictable scenarios.

1.3.2.3. Target Detection Capabilities:

- Develop computer vision models using machine learning to detect, identify, and locate ground targets.
- Test and refine these models to ensure accuracy in diverse environmental conditions.

1.3.2.4. Mobile Interface Development:

- Create a user-friendly mobile application for real-time monitoring and control of the drone fleet.
- Include features for visualizing drone locations, mission progress, and detected targets.

1.3.2.5. Testing and Validation:

- Conduct comprehensive testing of the simulation environment, coordination algorithms, and target detection capabilities.
- Simulate various disaster scenarios, including multifaceted challenges like blocked paths, simultaneous targets, and hazardous areas.

By achieving these goals and objectives, the MDCS project aims to demonstrate the transformative potential of coordinated multi drone systems in addressing real world disaster response challenges.

1.4. Literature Review

The field of disaster response has increasingly benefited from advancements in unmanned aerial vehicle (UAV) technology, with a growing body of research exploring its applications, limitations, and potential for innovation. This literature review highlights key studies, frameworks, and insights that have informed the design and implementation of the **Multi-Drone Coordination System (MDCS)**.

Applications of UAVs in Disaster Response

Research has consistently demonstrated the value of UAVs in enhancing disaster response operations. Studies such as those by Erdelj et al. (2017) [2] on Flying Ad Hoc Networks (FANETs) underscore the ability of drones to navigate complex environments, perform aerial reconnaissance, and communicate over large areas in real time. FANETs serve as a foundational concept for multi-drone coordination, providing insights into distributed communication and autonomous decision-making.

Other works, including the findings of Van Hung (2022) [3], illustrate how drones have been used effectively in post-disaster damage assessment, as noted in UNDP's Disaster Risk Reduction initiatives. These studies highlight UAVs' role in collecting immediate, accurate data for infrastructure analysis and resource allocation, reducing dependency on ground teams operating in hazardous conditions.

Challenges in Multi-Drone Systems

Although individual drones have proven effective in various scenarios, scaling operations to include multiple UAVs introduces challenges in areas such as communication, task allocation, and collision avoidance. Studies by Y.Ma, et al. (2020) [4] delve into these issues, focusing on the development of algorithms that enable autonomous collaboration among drones. Key challenges identified include:

- **Communication Protocols:** Ensuring real-time, low-latency communication between UAVs in dynamic environments.
- **Task Allocation:** Developing frameworks for efficient distribution of tasks among drones to optimize resources and minimize redundancy.
- **Safety Mechanisms:** Implementing robust collision-avoidance systems that adapt to evolving obstacles and crowded airspace.

Advancements in Target Detection

Computer vision and machine learning have significantly advanced the capabilities of drones to identify and locate targets. Studies by Redmon et al. (2016) [5] on the YOLO (You Only Look Once) object detection algorithm have been particularly influential in the development of fast and accurate detection systems for UAVs. These frameworks have been adapted for disaster scenarios, allowing drones to identify human victims, hazardous objects, or structural damage in real-time.

Research into environmental adaptability, such as the work by Tang et al. (2019) [6], highlights the importance of fine-tuning models for diverse conditions, including poor lighting, heavy rain, or dense smoke. These insights are critical to ensuring the reliability of UAVs in disaster scenarios.

Relevance of Patent US10777051B1

The reviewed patent, **US10777051B1**, provides a detailed design for UAV systems specifically aimed at emergency response. This patent outlines methodologies for autonomous navigation, obstacle detection, and task execution, offering valuable insights into practical implementations of drone technology. Features such as modular payloads and autonomous swarm behavior align closely with the objectives of the MDCS project, reinforcing the feasibility and impact of the proposed design.

Conclusion

The existing literature establishes a strong foundation for leveraging multi-drone systems in disaster response. While individual UAVs have shown significant promise, scaling to coordinated, multi-drone teams is essential for addressing the growing complexity of disasters. By integrating insights from existing research, patents, and technological advancements, the MDCS project seeks to push the boundaries of what UAVs can achieve, demonstrating their transformative potential in disaster response scenarios.

2. Proposed Design

2.1. Project Requirements

The MDCS project is grounded in a comprehensive set of requirements designed to ensure the system's functionality, usability, and safety. These requirements are categorized into three primary areas: functional, usability, and safety.

2.1.1. Functional Requirements

The functional requirements define the core capabilities of the MDCS and its subsystems:

- **F.1. Simulated Environment:**
 - Must create a realistic simulation environment in Microsoft AirSim that includes dynamic weather conditions, obstacles, and varying terrains.
 - Must support multi-drone scenarios for testing coordination algorithms under simulated disaster conditions.
- **F.2. Multi-Drone Coordination and Control:**
 - The system shall enable real-time communication and coordination among multiple UAVs to coordinate actions effectively.
- **F.3. Collision Avoidance:**
 - The system shall implement collision avoidance mechanisms to prevent drones from colliding in the simulated environment.
- **F.4. Dynamic Task Assignment:**
 - The system shall allow for dynamic assignment and reassignment of tasks among drones based on mission requirements and real-time data.
- **F.5. Target Detection:**

- The system shall incorporate algorithms that enable drones to detect and identify target objectives on the ground with high accuracy.
- **F.6. Real-Time Data Processing and Display:**
 - The system shall process and display detection results in real-time, providing operators with immediate feedback on target status.
- **F.7. Coordinated Rescue Operations:**
 - The system shall facilitate coordinated rescue missions involving multiple drones operating collaboratively in various disaster scenarios.
- **F.8. Mission Planning and Execution Support:**
 - The system shall support mission planning and execution for emergencies, including hurricanes, natural disasters, and power outages.
- **F.9. Data Management:**
 - The system shall efficiently handle large volumes of real-time data generated by multiple drones during operations.
- **F.10. User Interface Accessibility:**
 - The system shall provide an intuitive, real-time interface accessible via mobile devices enabling operators to monitor and control UAV operations remotely.

2.1.2. Usability Requirements

The usability requirements focus on ensuring the system is user-friendly and accessible to disaster response teams:

- **U.1. User-Friendly Interface:**
 - The mobile app must feature an easy-to-navigate interface with clear visual indicators for drone status, mission objectives, and detected hazards.
- **U.2. Real-Time Data Display:**
 - The interface shall display real-time data and status updates in a clear and organized manner.
- **U.3. Device Compatibility:**
 - The system shall be compatible with various mobile devices, including smartphones and tablets, to ensure broad usability.
- **U.4. Multi-User Support:**

- The system shall support multiple user accounts with varying access levels to accommodate different operational roles.

- **U.5. Responsiveness:**

- The system shall respond to user inputs and control commands within a predefined time frame to ensure smooth operation, with a target response time of less than 2 seconds.

2.1.3. Safety Requirements

The safety requirements are critical to ensuring the safe operation of the MDCS and its UAVs:

- **S.1. Collision Avoidance:**

- The system shall implement robust collision avoidance algorithms to prevent drones from crashing into each other or obstacles within the simulation environment.

- **S.2. Data Security:**

- The system shall ensure that all data transmitted between drones and the user interface is encrypted to prevent unauthorized access.

- **S.3. Authentication Mechanisms:**

- The system shall implement authentication mechanisms to verify user identities before granting access to control functions..

- **S.4. Emergency Protocols:**

- The system shall have predefined emergency protocols that activate in the event of critical failures, such as loss of communication or power outages.

- **S.5. Autonomous Safe State Transition:**

- The system shall allow drones to autonomously return to a designated safe zone or land safely upon activation of emergency protocols.

These requirements ensure that the MDCS achieves its objectives while remaining reliable, user-friendly, and safe in high-stakes disaster response scenarios.

2.2. Product Design

Overview of Design:

The MDCS comprises several interconnected subsystems, each responsible for distinct functionalities that collectively enable coordinated multi-drone operations. The design emphasizes modularity, scalability, and robustness to ensure the system can adapt to various disaster scenarios and operational demands.

2.2.1. Mechanical and Electrical Design

Mechanical:

- Drones are equipped with modular payloads to allow for task-specific equipment, such as cameras, LIDAR sensors, and communication devices. The mechanical design ensures drones are lightweight yet durable, capable of withstanding harsh environmental conditions encountered during disaster scenarios.

Electrical:

- Each drone integrates advanced navigation and control systems, including GPS modules, inertial measurement units (IMUs), and wireless communication interfaces. Power management systems are designed to optimize battery life, ensuring prolonged operational capabilities during missions.

2.2.2. Material Selection


Materials are selected based on durability, weight, and cost-effectiveness. The drone frames utilize carbon fiber composites for strength and lightness, while electronic components are housed in weather-resistant casings to protect against environmental hazards.

2.2.3. Engineering Design Requirements

Customer requirements have been translated into engineering design requirements as follows:


- Functional:
 - Implemented through specific subsystems such as Drone Control, Target Detection, and Communication, ensuring each system component fulfills its designated role.
- Usability:
 - Addressed by developing an intuitive mobile interface that provides real-time monitoring and control capabilities, ensuring ease of use for operators.
- Safety:
 - Ensured through the integration of collision avoidance algorithms, data encryption protocols, and emergency protocols that automatically activate in critical situations.

2.3. Block Diagram

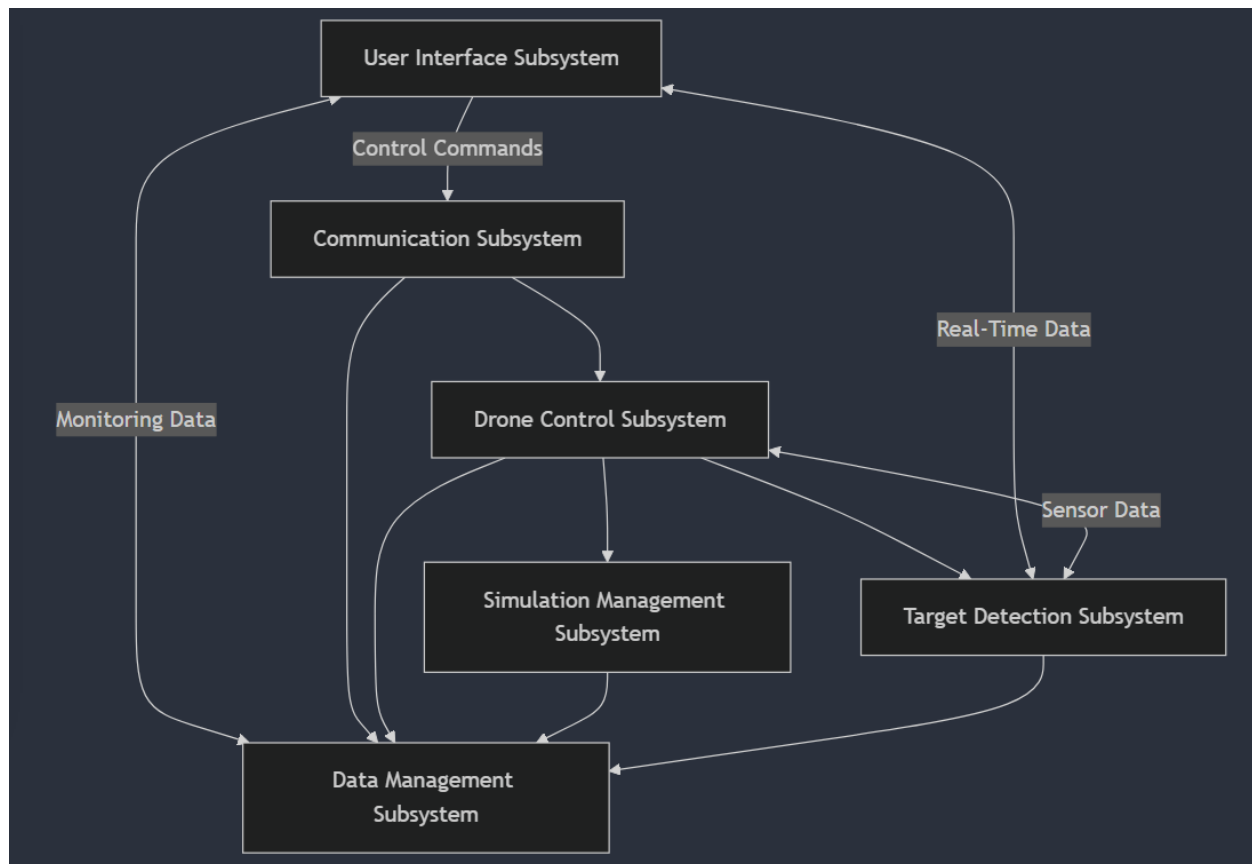


- **User Interface Subsystem (A):** Sends control commands to the Communication Subsystem (B) and receives real-time monitoring data from the Data Management Subsystem (F).
- **Communication Subsystem (B):** Facilitates communication between the User Interface Subsystem (A) and the Drone Control Subsystem (C), and interacts with the Data Management Subsystem (F).
- **Drone Control Subsystem (C):** Receives control commands via the Communication Subsystem (B), communicates with the Simulation Management Subsystem (D) for environmental data, and interacts with the Target Detection Subsystem (E) for sensor data. It also interacts with the Data Management Subsystem (F).
- **Simulation Management Subsystem (D):** Provides environmental data to the Drone Control Subsystem (C) and interacts with the Data Management Subsystem (F).
- **Target Detection Subsystem (E):** Receives sensor data from the Drone Control Subsystem (C), processes it, and sends real-time data back to the User Interface Subsystem (A). It also interacts with the Data Management Subsystem (F).
- **Data Management Subsystem (F):** Acts as a central hub for storing and managing data from all other subsystems.

2.4. State Diagram

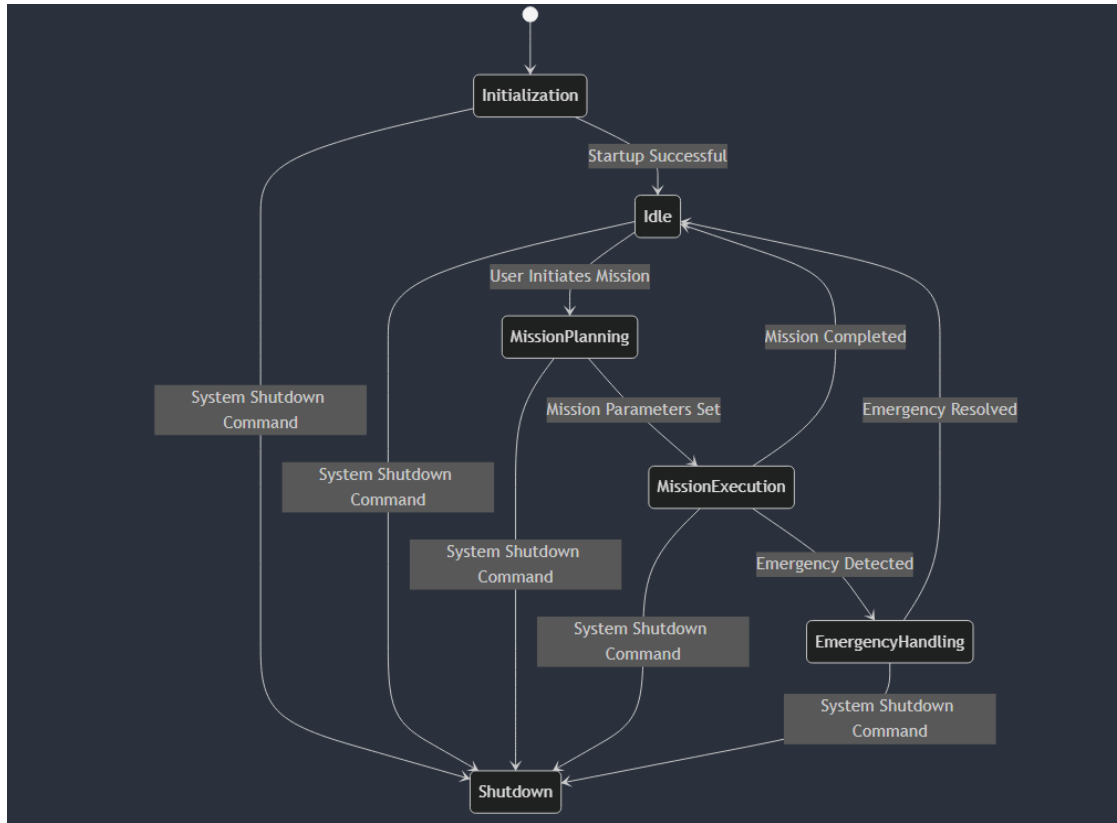

- States:
 - Initialization: System startup phase.
 - Idle: System is waiting for user input or missions.
 - Mission Planning: Configuring mission parameters.
 - Mission Execution: Active phase where drones carry out the mission.
 - Emergency Handling: Managing unexpected emergencies during missions.
 - Shutdown: System is powering down.
- Transitions:
 - Initialization → Idle: Upon successful startup.
 - Idle → Mission Planning: When a user initiates a mission.
 - Mission Planning → Mission Execution: After mission parameters are set.
 - Mission Execution → Emergency Handling: If an emergency is detected during execution.
 - Mission Execution → Idle: Upon successful mission completion.
 - Emergency Handling → Idle: After resolving the emergency.
 - Any State → Shutdown: When a shutdown command is received.

2.5. Subsystem State Diagram

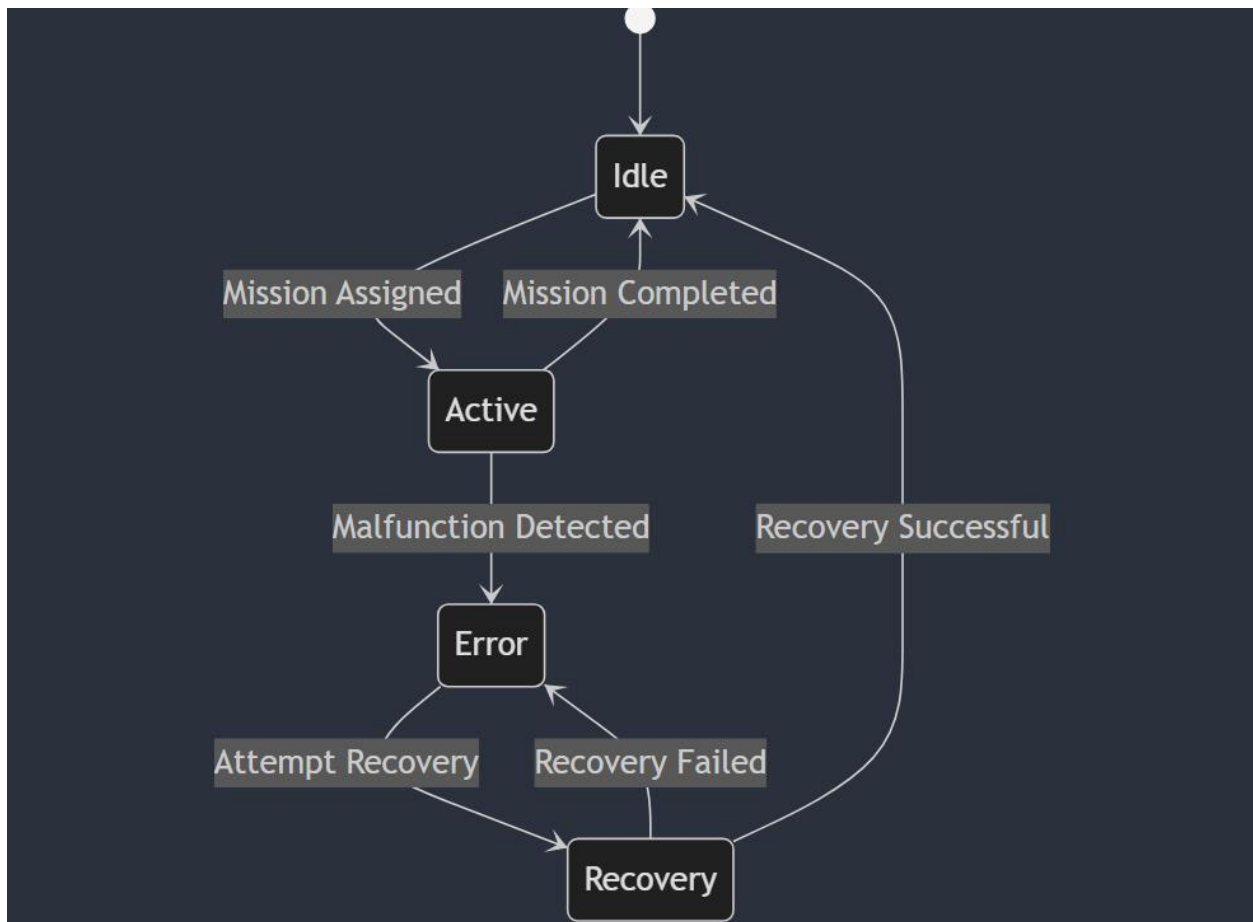

- States:
 - Idle: Waiting for mission assignments.
 - Active: Currently executing a mission.
 - Error: A malfunction or anomaly has been detected.
 - Recovery: Attempting to resolve the error.
- Transitions:
 - Idle → Active: When a mission is assigned.
 - Active → Idle: Upon mission completion.
 - Active → Error: If a malfunction is detected during mission execution.
 - Error → Recovery: When attempting to fix the issue.
 - Recovery → Idle: If recovery is successful.
 - Recovery → Error: If recovery fails and the system remains in an error state.

2.6. Requirements Mapping Table

| Requirement | Subsystem Implementing the Requirement | Description |
|------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F.1 Simulated Environment | Simulation Management Subsystem (D) | Simulation Management Subsystem (D) creates and maintains a highly realistic 3D simulation environment using Microsoft AirSim. It accurately models real-world conditions, including diverse terrains, dynamic weather patterns, and various obstacles. This environment serves as the testing ground for drone operations, ensuring that simulations reflect potential real-life disaster scenarios. |
| F.2 Multi-Drone Coordination and Control | Drone Control Subsystem (C) | Drone Control Subsystem (C) enables real-time communication and coordination among multiple UAVs. It implements advanced control algorithms that manage drone navigation, stability, and synchronized actions. This subsystem ensures that drones can collaboratively execute tasks, share positional data, and adjust their operations dynamically based on mission requirements and environmental changes. |
| F.3 Collision Avoidance | Drone Control Subsystem (C) | Drone Control Subsystem (C) incorporates robust collision avoidance algorithms that continuously monitor drone trajectories and detect potential collision risks with other drones or obstacles. Upon identifying a threat, the subsystem autonomously |

| | | |
|-------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | adjusts drone paths to prevent collisions, ensuring safe and uninterrupted operations within the simulated environment. |
| F.4 Dynamic Task Assignment | Drone Control Subsystem (C) | Drone Control Subsystem (C) facilitates dynamic task allocation by assessing real-time mission data and drone capabilities. It intelligently assigns and reassigns tasks among drones based on current mission objectives, drone availability, and environmental factors. This flexibility optimizes resource utilization and enhances mission efficiency. |
| F.5 Target Detection | Target Detection Subsystem (E) | Target Detection Subsystem (E) utilizes onboard sensors such as cameras and LIDAR, along with machine learning algorithms, to accurately detect and identify target objectives on the ground. It processes sensor data in real-time, enabling drones to locate victims, hazardous objects, or structural damage with high precision, thereby supporting effective rescue operations. |
| F.6 Real-Time Data Processing and Display | User Interface Subsystem (A) | User Interface Subsystem (A) receives processed detection data from the Target Detection Subsystem (E) and other operational data from various subsystems. It displays this information in real-time on the mobile application, providing operators with immediate insights into drone statuses, |

| | | |
|--------------------------------------------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | target locations, and overall mission progress through interactive maps and dashboards. |
| F.7 Coordinated Rescue Operations | Drone Control Subsystem (C) | Drone Control Subsystem (C) orchestrates coordinated rescue missions by managing the deployment and collaboration of multiple drones. It ensures that drones work together seamlessly to cover large areas, perform synchronized searches, and execute rescue tasks efficiently. This coordination enhances the overall effectiveness of disaster response efforts. |
| F.8 Mission Planning and Execution Support | User Interface Subsystem (A) | User Interface Subsystem (A) provides operators with comprehensive mission planning tools within the mobile application. Operators can define mission parameters, select specific objectives, and deploy drones accordingly. The subsystem supports the seamless transition from planning to execution, ensuring that missions are carried out as intended with real-time monitoring and adjustments. |
| F.9 Data Management | Data Management Subsystem (F) | Data Management Subsystem (F) handles the storage, processing, and retrieval of large volumes of real-time data generated by multiple drones. It utilizes robust database systems to ensure data integrity and security, enabling efficient access for analysis and reporting. This |

| | | |
|-----------------------------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | subsystem supports comprehensive monitoring of drone performance and mission outcomes, facilitating informed decision-making. |
| F.10 User Interface Accessibility | User Interface Subsystem (A) | User Interface Subsystem (A) ensures that the mobile application is accessible across various devices, including smartphones and tablets. It provides an intuitive and responsive interface that allows operators to easily monitor and control UAV operations remotely. Features such as customizable dashboards, touch-friendly controls, and real-time notifications enhance user accessibility and operational efficiency. |
| U.1 User-Friendly Interface | User Interface Subsystem (A) | User Interface Subsystem (A) is designed with an intuitive layout and navigation structure, making it easy for users with varying technical expertise to operate. The interface includes clear visual indicators, streamlined menus, and contextual help features that guide users through monitoring drone statuses, configuring missions, and responding to alerts without requiring extensive training. |
| U.2 Real-Time Data Display | User Interface Subsystem (A) | User Interface Subsystem (A) presents real-time data through organized and visually appealing displays. It uses interactive maps to show drone locations, overlays sensor data for target |

| | | |
|--------------------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | detection, and provides dynamic updates on mission progress. This clear presentation of information allows operators to quickly assess situations and make informed decisions during disaster response operations. |
| U.3 Device Compatibility | User Interface Subsystem (A) | User Interface Subsystem (A) is developed using cross-platform technologies such as React Native, ensuring compatibility with a wide range of mobile devices, including both iOS and Android smartphones and tablets. This broad compatibility ensures that operators can access and control the MDCS from their preferred devices without facing technical limitations or requiring specialized hardware. |
| U.4 Multi-User Support | Communication Subsystem (B) | Communication Subsystem (B) manages multiple user accounts with varying access levels, allowing different operational roles such as administrators, operators, and analysts to access the system according to their permissions. It ensures secure and efficient handling of multiple simultaneous user sessions, enabling collaborative operations and preventing unauthorized access to sensitive control functions. |
| U.5 Responsiveness | Communication Subsystem (B) | Communication Subsystem (B) is optimized to ensure that the system responds to user |

| | | |
|-------------------------------|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | <p>inputs and control commands within a predefined time frame of less than 2 seconds. It achieves this through efficient data transmission protocols and robust network infrastructure, ensuring smooth and uninterrupted interactions between operators and the MDCS, even under high-load conditions.</p> |
| S.1 Collision Avoidance | Drone Control Subsystem (C) | <p>Drone Control Subsystem (C) employs advanced collision avoidance algorithms that continuously analyze drone trajectories and environmental data to prevent collisions. These algorithms dynamically adjust drone paths in real-time, ensuring safe operations by avoiding both intra-drone and drone-obstacle interactions within the simulation environment.</p> |
| S.2 Data Security | Communication Subsystem (B) | <p>Communication Subsystem (B) ensures that all data transmitted between drones and the User Interface Subsystem (A) is encrypted using industry-standard encryption protocols such as AES-256. This encryption safeguards sensitive operational data from unauthorized access and potential cyber threats, maintaining the integrity and confidentiality of the information exchanged within the MDCS.</p> |
| S.3 Authentication Mechanisms | Communication Subsystem (B) | <p>Communication Subsystem (B) implements robust</p> |

| | | |
|--------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | authentication mechanisms, including multi-factor authentication (MFA) and role-based access control (RBAC), to verify user identities before granting access to control functions. These measures prevent unauthorized users from accessing or manipulating the system, thereby enhancing overall security and operational reliability. |
| S.4 Emergency Protocols | Drone Control Subsystem (C) | Drone Control Subsystem (C) integrates predefined emergency protocols that automatically activate in the event of critical system failures, such as loss of communication or power outages. These protocols ensure that drones safely transition to a designated safe state by autonomously returning to a predefined safe zone or executing safe landing procedures, thereby minimizing risks during emergencies. |
| S.5 Autonomous Safe State Transition | Drone Control Subsystem (C) | Drone Control Subsystem (C) enables drones to autonomously transition to a safe state by utilizing built-in fail-safes and redundant control pathways. In the event of system malfunctions or emergency protocol activation, drones can independently navigate to a safe location or perform controlled landings without requiring manual intervention, ensuring continuous safety and |

| | | |
|--|--|------------------------|
| | | operational integrity. |
|--|--|------------------------|

3. Implementation

This section outlines the approach to implementing the MDCS, detailing the hardware and software components, user interface design, data communication strategies, and testing methodologies.

3.1. Hardware Components**

(This section was written rhetorically since we will be working exclusively in the 3D environment and will be changed in the final draft)

The hardware components selected for the MDCS are crucial for ensuring reliable drone operations and effective system performance. The hardware implementation includes both drone-specific components and infrastructure for the simulation and control systems.

Components for Subsystem:

- **Simulation Management Subsystem (D):**
 - **High-Performance Computers:**
Required to run the 3D simulation environment with real-time rendering capabilities.
 - **Graphics Processing Units (GPUs):**
Enhance the simulation's visual fidelity and support complex environmental models.
- **Drone Control Subsystem (C):**
 - **UAV Platforms:**
Standard drones equipped with necessary sensors and communication modules.
 - **Flight Controllers:**
Ensure stable and accurate drone navigation and control.
- **Target Detection Subsystem (E):**
 - **Cameras and LIDAR Sensors:**
Enable accurate target detection and environmental mapping.
 - **Onboard Processing Units:**
Handle real-time data processing for target identification.
- **User Interface Subsystem (A):**

- **Mobile Devices:**
Smartphones and tablets used by operators to monitor and control drones.
- **Servers:**
Host the mobile application backend and manage data flow between subsystems.
- **Data Management Subsystem (F):**
 - **Database Servers:**
Store and manage large volumes of operational data securely.
 - **Storage Solutions:**
Provide scalable data storage capabilities for real-time access and archival.
- **Communication Subsystem (B):**
 - **Wireless Communication Modules:**
Facilitate reliable data exchange between drones and control systems.
 - **Network Infrastructure:**
Ensure stable connectivity and low-latency communication across all drones.

3.2. Software Components

3.2.1. Communication Protocols

Efficient and reliable communication is critical for coordinating multiple drones in a disaster response scenario. The project incorporates the following communication frameworks:

- **Integration with AirSim:**
 - AirSim provides APIs (via Python) that allow simulated drones to send and receive commands, telemetry, and sensor data. The communication layer leverages these APIs to emulate inter-drone communication and ground control systems.
- **Protocols and Frameworks:**
 - **MAVLink Emulation:**
 - AirSim's Python APIs can emulate MAVLink-style commands to simulate drone telemetry and mission management.

- **ROS 2 Middleware:**
 - ROS 2 topics and nodes are used to coordinate between virtual drones, simulating real-world message passing for task allocation, state synchronization, and event notifications.
- **Custom Python Scripting**
 - Scripts interact directly with AirSim's API to simulate inter-drone communication, including broadcasting positional data and sharing target detection results.
- **Implementation Features:**
 - **Low-Latency Communication:** Messages are exchanged within the simulation framework to minimize delays during coordination.
 - **Synchronization:** Ensures all drones in the simulation operate on a shared timeline, maintaining consistency in movement, state updates, and sensor inputs.
 - **Scalability:** The protocol can handle multiple drones, enabling testing of swarming algorithms and multi-drone task allocation.

3.2.2. Algorithms and Languages Used

The software stack incorporates a variety of algorithms and programming languages to achieve its objectives.

- **Languages:**
 - **Python:** For developing AI models, AirSim scripting, and integration with ROS.
 - **C++:** For performance-critical components such as collision-avoidance algorithms.
 - **Javascript:** For the mobile app interface.
- **Algorithms:**
 - **Task Allocation:**
 - Uses a market-based algorithm to assign tasks dynamically among drones, based on priority and proximity to targets.
 - **Collision Avoidance**

- RRT (Rapidly-Exploring Random Trees) for global path planning.
 - Potential field algorithm for local obstacle avoidance.
- **Target Detection:**
 - YOLOv5 for real-time object detection and classification from UAV camera feeds.
- **Optimization:**
 - Simulated Annealing for optimizing mission paths across drones.

3.2.3. Simulation Environment (Microsoft AirSim)

- **Description:**
 - AirSim is the primary simulation platform used to model a realistic 3D Environment. It includes weather conditions, terrain features, and obstacles to test drone coordination and performance.
- **Key Features:**
 - Support for multiple UAV models with realistic flight dynamics.
 - Integration with Unreal Engine for high-fidelity graphics and physics simulation.
 - APIs for controlling drones and obtaining telemetry data.
- **Responsibilities:**
 - Generating a controlled environment for testing algorithms.
 - Providing sensor data (e.g., GPS, IMU, camera feeds) for vision-based applications

3.2.4. AirSim Configuration

Microsoft AirSim is configured to simulate a realistic environment for testing multi-drone coordination and target detection capabilities. Key configurations include:

- **Environment Setup:**
 - Custom Unreal Engine terrain, including urban, forested, and disaster affected areas.
 - Dynamic obstacles such as moving vehicles and debris.
- **Drone Models:**

- Simulated quadrotors with configurable sensors (RGB cameras, depth cameras, LiDAR).
- **Weather Effects:**
 - Simulating adverse weather (e.g., rain, fog, wind) to test system robustness.
- **Data Acquisition:**
 - Synchronized drone telemetry (GPS, IMU) and vision data via AirSim's APIs.

4. Development Plan and Schedule

4.1. Outline of the Plan

The MDCS project follows a structured development plan to ensure its timely delivery and optimal performance of all subsystems. Key phases include requirement analysis, design, implementation, and testing. Each phase has well-thought-out objectives, deliverables, and timelines to align with project milestones.

4.2. Work Breakdown Schedule and Key Milestones

4.2.1. Work Breakdown Schedule

| Task ID | Task Name | Assigned to | Duration | Start date | End date |
|---------|--------------------------------------------|---------------------|----------|------------|------------|
| 1 | Requirement Analysis | Everyone | 2 Weeks | 05/11/2024 | 19/11/2024 |
| 2 | Target Detection Subsystem | Tutku Gizem Guder | 5 Weeks | 20/11/2024 | 20/12/2024 |
| 3 | Data Management & Communication Subsystems | Matthew Wyatt | 3 Weeks | 20/11/2024 | 10/12/2024 |
| 4 | Drone Control Subsystem | Tarek Kayali | 4 Weeks | 21/12/2024 | 21/01/2025 |
| 5 | Simulation Management Subsystem | Brenden Martins | 4 Weeks | 21/12/2024 | 21/01/2025 |
| 6 | User Interface Subsystem | Matthew Paternoster | 4 Weeks | 22/01/2025 | 19/02/2025 |

| | | | | | |
|---|-----------------------|----------|---------|------------|------------|
| 7 | Integration & Testing | Everyone | 3 Weeks | 19/02/2025 | 10/03/2025 |
|---|-----------------------|----------|---------|------------|------------|

4.2.2. Key Milestones

| Milestone ID | Description | Due Date |
|--------------|-------------------------------------------------------|------------|
| M1 | Completion of Requirement Analysis | 03/12/2024 |
| M2 | Target Detection & Communication Subsystems Completed | 24/12/2024 |
| M3 | Simulation and Drone Control Subsystems Completed | 21/01/2025 |
| M4 | User Interface Subsystem Functional | 25/02/2025 |
| M5 | Full System Integration & Testing Completed | 25/03/2025 |

4.3. Budget Overview

| Category | Items | Cost | Notes |
|-------------------|---------------------------------|----------|----------------------------------------|
| Hardware | Drones and Sensors | \$5,000 | Includes UAV platforms and LIDAR units |
| Software | AirSim License | \$500 | For a simulation environment. |
| Development Tools | IDEs, APIs, and Libraries | \$1,000 | Includes paid software tools. |
| Personnel | Development Time (Team Members) | \$10,000 | Estimated cost based on hourly rates. |
| Miscellaneous | Testing Equipment & Misc. Costs | \$1,500 | For unseen project expenses |
| Total Cost | | \$18,000 | |

References

- [1][3] Duong, H. V. (2023, May 20). *Drones for assessment of disaster damage and impact - revolutionizing disaster response*. UNDP. <https://www.undp.org/vietnam/blog/drones-assessment-disaster-damage-and-impact-revolutionizing-disaster-response>
- [2] Erdelj, M. et al. (2017, June 3). *Wireless sensor networks and Multi-UAV Systems for Natural Disaster Management*. Computer Networks. <https://www.sciencedirect.com/science/article/abs/pii/S1389128617302220>
- [4] Y. Ma, Y. Zhao, S. Bai, J. Yang and Y. Zhang, "Collaborative task allocation of heterogeneous multi-UAV based on improved CBGA algorithm," *2020 16th International Conference on Control, Automation, Robotics and Vision (ICARCV)*, Shenzhen, China, 2020, pp. 795-800, doi: 10.1109/ICARCV50220.2020.9305380.
- [5] Redmon, J., et al (n.d.). You only look once: Unified, real-time object detection. https://www.cv-foundation.org/openaccess/content_cvpr_2016/papers/Redmon_You_Only_Look_CVPR_2016_paper.pdf
- [6] Tang, J., Duan, H. & Lao, S. Swarm intelligence algorithms for multiple unmanned aerial vehicles collaboration: a comprehensive review. *Artif Intell Rev* **56**, 4295–4327 (2023). <https://doi.org/10.1007/s10462-022-10281-7>