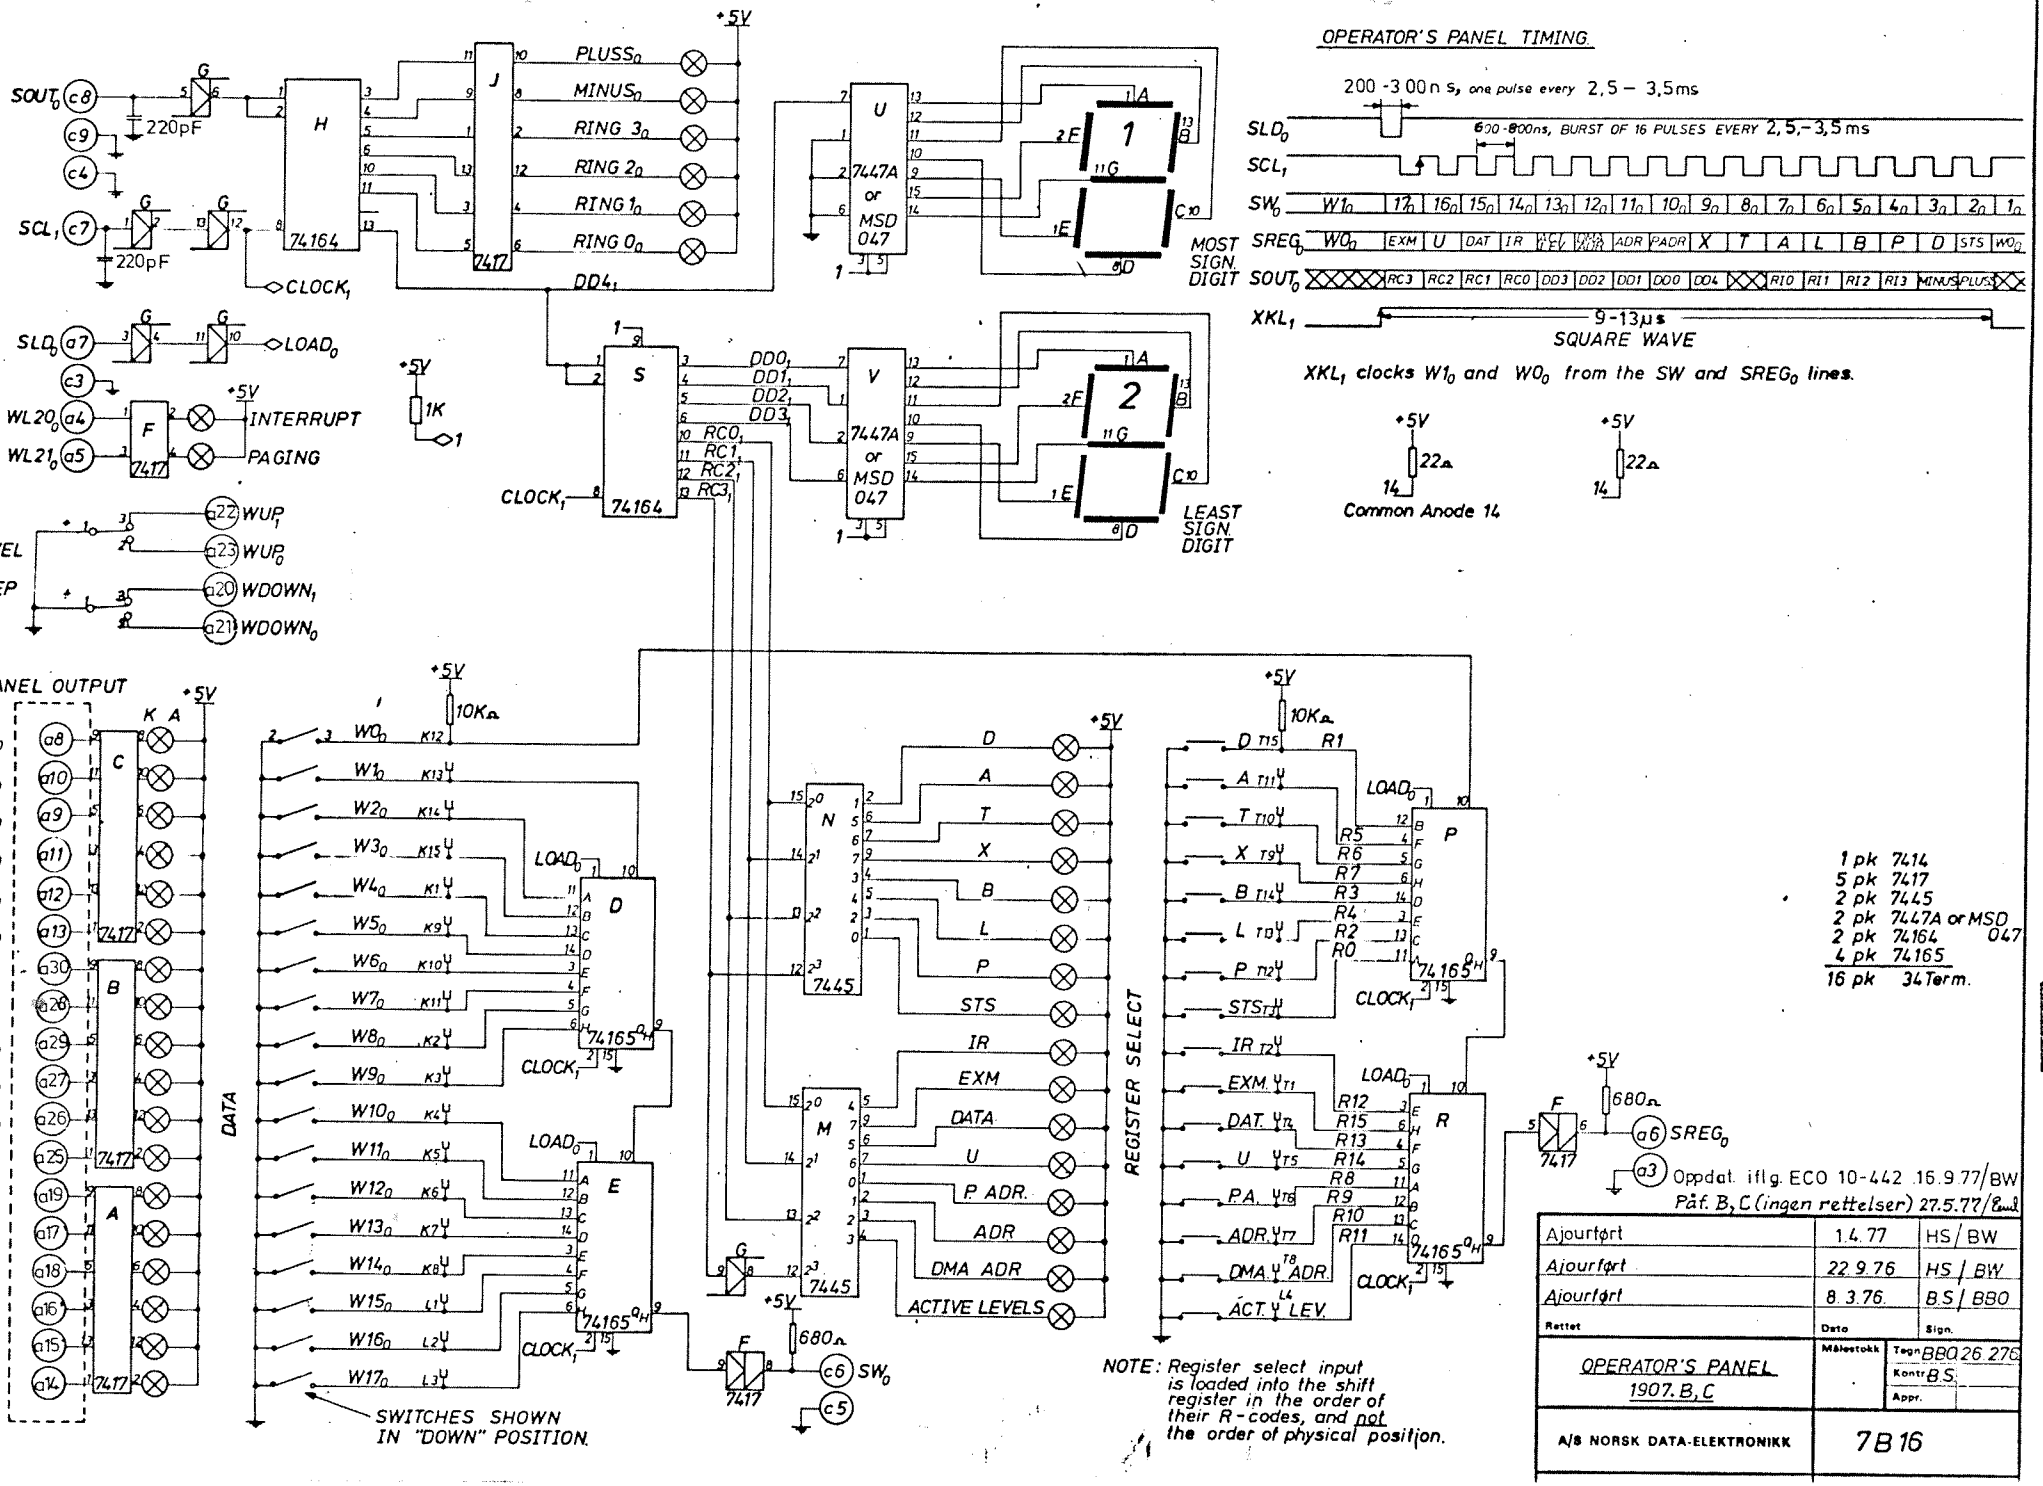

OPERATOR'S PANEL TIMING
200 -300 ns, one pulse every 2,5 – 3,5ms
600-800ns, BURST OF 16 PULSES EVERY 2,5,–3,5 ms
SLD0
SCL1
SW0
SREG0
SOUT0
XKL1
9-13µs
SQUARE WAVE
XKL1 clocks W10 and WO0 from the SW and SREG0 lines.
MOST SIGN. DIGIT
LEAST SIGN. DIGIT
Common Anode 14
SOUT0
SCL1
SLD0
WL200
WL210
LEVEL
STEP
INTERRUPT
PAGING
CLOCK1
LOAD0
DD41
PANEL OUTPUT
DATA
REGISTER SELECT
SWITCHES SHOWN IN "DOWN" POSITION.
D
A
T
X
B
L
P
STS
IR
EXM
DATA
U
P ADR.
ADR
DMA ADR
ACTIVE LEVELS
NOTE: Register select input is loaded into the shift register in the order of their R-codes, and not the order of physical position.
1 pk 7414
5 pk 7417
2 pk 7445
2 pk 7447A or MSD 047
2 pk 74164
4 pk 74165
16 pk 34 Term.
Oppdat. iflg. ECO 10-442 16.9.77/BW
Påf. B, C (ingen rettelser) 27.5.77/Emil
Ajourført 1.4.77 HS/BW
Ajourført 22.9.76 HS/BW
Ajourført 8.3.76. BS/BBO
Rettet Dato Sign.
OPERATOR'S PANEL
1907.B,C
Målestokk
Tegn BBO 26.276
Kontr BS
Appr.
A/S NORSK DATA-ELEKTRONIKK
7B16