

ELHYDRO METHOD - CROP & RESOLUTION

1. What is it?

The ElHydro method consists of cropping the invisible or useless peripheral pixels in VR (tangential crop) in order to reinvest all the GPU power saved into targeted supersampling, right where the eye is looking. Thanks to a dedicated mathematical calculator, it compensates for the reduced field of view to preserve a perfect optical geometry while drastically increasing effective sharpness (PPD). The result is surgical visual clarity without relying on destructive third-party drivers, while locking in a maximum and stable framerate.

In other words, and more simply: we cut off (crop) the useless edges of the image that you never look at in game, to relieve your graphics card. The power freed up is reinvested directly into the center of your vision, which makes the game much sharper while staying perfectly smooth.

2. What you need to set up this method

- OpenXR Toolkit - PrimaShock mod (the toolkit is what lets you perform the crop operations, among other things)
- the Excel file for your headset (the Excel file gives the correct values we will need later)

3. Install OpenXR Toolkit - PrimaShock mod (version 1.4.0)

https://eu.pimax.com/blogs/blogs/a-guide-to-primashock-s-openxr-toolkit-mod?srsId=AfmBOoqR95Xx9pTTjZDHc7Bn20eE9YkWMZkvGw_X5-3CVLthO2JYGcYx&shpxid=0c032444-9a31-414b-8d5a-737d69f385d1

(the download links are also available on these pages)

<https://github.com/mbucchia/OpenXR-Toolkit/releases/tag/1.3.2>

<https://primashock.com/openxr-toolkit-mod-by-primashock-vr/>


<https://discord.com/channels/1371247671024680990/1536426623157534750>

Step 1: Prerequisites Before installing the mod, make sure you have installed the original version 1.3.2 of OpenXR Toolkit.

1. Download the file [OpenXR-Toolkit-v1.3.2.msi](#).
2. Run the installer and follow the instructions to complete the setup.

Step 2: Installing the PrimaShock mod Once the base toolkit is installed, follow these steps to apply the modified files:

1. **Download the files:** Download the mod DLL file via the ZIP download button. Unzip it and extract the file(s).
2. **Locate the installation folder:** It is usually located at [C:\Program Files\OpenXR-Toolkit](#).
3. **Back up your files:** Rename the existing file [XR_API_LAYER_MBUCCHIA_toolkit.dll](#) to something like [XR_API_LAYER_MBUCCHIA_toolkit.back](#).

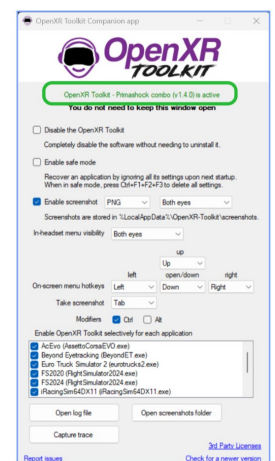


4. **Copy the new DLL:** Drag and drop the file `XR_API_LAYER_MBUCCHIA_toolkit.dll` extracted from the PrimaShock ZIP into the installation folder. If you are using the *3D BOOST + PERFORMANCE CROP* mod: also back up the original file, then copy the new shader file (`postprocess.hlsl`) into `C:\Program Files\OpenXR-Toolkit\Shaders`.
5. **Update the shaders:** Open the `Shaders` folder in the installation directory.
6. **Back up the original shaders:** Create a backup copy of the original shader files.
7. **Copy the new shaders:** Copy the contents of the `shaders` folder from the mod ZIP file into this directory.
8. **Check:** Open the OpenXR Toolkit companion app. It should now display “Primal Shock mod”.

4. Choose the Excel file for your headset

<https://discordapp.com/channels/1371247671024680990/1530019814263754854>

example for the Pimax Dream Air

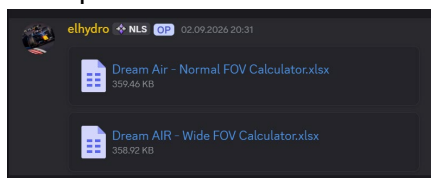

Open the Excel file and that is all for now (we will need it later)

5. RESET TOOLKIT

To make sure you start the configuration cleanly, if you have already used the toolkit before, I recommend doing a reset of the toolkit (it is not mandatory, but in my opinion it is better)

- Open the game
- open OpenXR Toolkit
- go to Menu+Reset+confirm
- **close the toolkit, close the game, and fully restart the headset (restart the headset and the service): that way we start clean**

Next step: choosing the crop (the crop = the amount of pixels we are going to remove)

6. Choosing the crop

You now need to choose the crop values: Up (top), Down (bottom), Left/Left (left), Right/Right (right), as well as the Left/Right and Right/Left crop (the ones near the nose). ElHydro suggests values depending on the car type; you can pick one of these values and test it. These values are indicative, and you can choose the one that suits you best. Feel, visual preference, GPU, CPU and many other criteria mean there is no single value that could be considered the best.

Target total vFOV (°)	Motorsport Visor Category (Example)	Up Target (°)	Down Target (°)	Total vFOV (°)
25°	Formula 1 / Open Wheel	12.50° (21.8%)	12.50° (21.8%)	25.00° (21.8%)
30°	Prototype / LMP	15.00° (26.2%)	15.00° (26.2%)	30.00° (26.2%)
35°	GTE / Le Mans Endurance	17.50° (30.5%)	17.50° (30.5%)	35.00° (30.5%)
40°	GT3 / GT4 Sports Cars	20.00° (34.9%)	20.00° (34.9%)	40.00° (34.9%)
★ 45°	Touring Cars / TCR	22.50° (39.2%)	22.50° (39.2%)	45.00° (39.2%)
50°	Rally / WRC / Off-Road	25.00° (43.6%)	25.00° (43.6%)	50.00° (43.6%)
55°	Track Day Street Cars	27.50° (47.9%)	27.50° (47.9%)	55.00° (47.9%)
60°	Open Visor / Max View	30.00° (52.3%)	30.00° (52.3%)	60.00° (52.3%)
★ Recommended	Balanced / All Around	22.50° (39.2%)	22.50° (39.2%)	45.00° (39.2%)

Personally I use these values, but again they depend on my own feel, the power of my PC, etc... (70 or 75 up, 90 or 95 down and 99% on the sides; the crop near the nose (L/R and R/L) is calculated via the Excel file)

Field of view	Simple Advanced
Up	70% (31.2°/31.2°)
Down	90% (-40.1°/-40.1°)
Left/Left	99% (-54.5°)
Left/Right	98% (44.6°)
Right/Left	98% (-44.6°)
Right/Right	99% (54.5°)

Percentages vs Degrees: what you need to understand

- The percentage (%) simply indicates the portion of the original view that you keep. For example, 70% means you keep 70% of the headset's native field of view and remove 30%.
- Degrees (°) measure the real angular aperture perceived by your eyes. This value in degrees is the one to keep in mind, because it is the only universal optical unit:
 - Each headset model has a different native field of view. A setting of 70% will not give the same angle on a Dream Air as on another headset.
 - This is essential for what follows: in ElHydro's Excel sheet, you must enter the value in degrees (the number in brackets in the Toolkit, e.g. 31.20°) and not the percentage, so that the resolution formulas are accurate.

CHOOSE YOUR VALUES AND GO TO THE EXCEL FILE

VALUES IN EXCEL

Open the Excel file

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

Instructions:

- The values shown here should always match OpenXR Toolkit values. Every crop has a specific Resolution set.

- Only enter the FOV angles for Up / Down / Left-Left. The calculator determines all remaining values automatically.

- From the Toolkit, enter the FOV angles shown in parentheses into the orange cells.
- Example: 85% (29.10') --> enter 29.10'.

- Start LL at 100%, Decrease LL until you first notice the FOV getting smaller. Record the value immediately before the reduction.

- Once the FOV values make it, choose a resolution from the highlighted range and enter it under Override Resolution in the Toolkit. Start at 100%, and increase resolution until PPS drops.

*NOTE: Image quality won't suffer from shergins from values from 100% resolution up to the Ideal Value (PPD-Eff %Diff). For performance purposes Start at 100%, and work your way up in resolution until PPS drops. (Don't let frame time float away!) (NOTE: SANE NUMBERS)

Super Sample Yellow Highlighted Cell Should be the Target input for an Equivalent Pixel per Degree to the native resolution... this will change depending on the Size of the Crop

FOV Orientation

FOV Values %:#(Angle):
USER INPUT = 3 VALUES ONLY
UP - DOWN - LEFT-LEFT

Up

70%

31.20

Down

90%

40.10

Left Left (LL)

99%

54.50

Left Right (RL)

99%

44.86

Right Left (RL)

99%

44.86

Right Right (RR)

99%

54.50

DO NOT CHANGE LR / RL / RR --- THEY ARE CALCULATED AUTOMATICALLY.

0.97 95% 4047 2992 46 -10.25%

Legend:
User Input
Soft Fixed - can be editable
RED FONT - Values of Interest
Underlined RED FONT - Output Values

Actual Helmet selection Degrees
71.30

Helmet Selection = Up + Down (angles) Cell BP24

Target helmet type
(*)

Motorhead Sport Vison Center (Example)

Up Target (*)

Down Target (*)

Total FOV Input

25°

Formula 1 / Open Wheel

18.30° (1/2%)

18.30° (1/2%)

36.60° (1%)

30°

Prototype / LMP

15.00° (0.2%)

15.00° (0.2%)

30.00° (0.4%)

35°

GT3 / Le Mans Endurance

17.50° (0.3%)

17.50° (0.3%)

35.00° (0.6%)

40°

GT3 / GT4 Pro Cars

20.00° (0.4%)

20.00° (0.4%)

40.00° (0.8%)

45°

GT3 / GT4 Pro Cars

20.00° (0.4%)

20.00° (0.4%)

40.00° (0.8%)

★ 47°

Touring Cars / TCR

22.50° (0.5%)

22.50° (0.5%)

45.00° (1.0%)

50°

Rally / WRC / Off-Road

25.00° (0.6%)

25.00° (0.6%)

50.00° (1.2%)

55°

Rally / WRC / Off-Road

25.00° (0.6%)

25.00° (0.6%)

50.00° (1.2%)

60°

Top Day Street Car

27.50° (0.7%)

27.50° (0.7%)

55.00° (1.4%)

65°

Open Water / Max View

30.00° (0.8%)

30.00° (0.8%)

60.00° (1.6%)

★ Recommended

Balanced / All Around

22.50° (0.5%)

22.50° (0.5%)

45.00° (1.0%)

Elbydro's Crop - Pimax Evo

Ideal Values

Top Center

Bottom Center

LEVEE Left

LEVEE Right

REVEE Left

REVEE Right

Where do I put the Selected Resolution? See below!

Performance Appearance inputs **System Menu**

Override resolution

Display width (per eye)

Display height (per eye)

No

Yes

4368

1561

1.47

1.48

1.50

215%

220%

225%

7443 4502

7529 4554

7614 4605

69

70

71

40.82%

42.86%

42.86%

In green: the 3 cells in the green circle (Up, Dn, Left Left):

These are the **only values you need to edit manually** in the spreadsheet. You must enter exactly the angles in degrees you have chosen (here: **31.20°**, **40.10°** and **54.50°**). All the other values below (**Left Right**, **Right Left**, **Right Right**) are calculated automatically by the geometric formula: **never edit them by hand**.

Make sure you enter degrees, not percentages!!!!

In blue: the supersampling you choose


110% SS row (5324 × 3220): This is the **native clarity target (0.00% PPD-Eff difference)**. By applying this level, you mathematically compensate for the lost surface and get back exactly the same pixel density per degree as the uncropped headset.

The higher levels (Example: the 140% level at 6006×3633):

As soon as you go above the 0.00% row, you enter **pure supersampling (Super Sampling)**

THIS IS AN EXAMPLE, THE VALUES ARE DIFFERENT DEPENDING ON THE HEADSET AND THE CROP. MAKE SURE YOU USE THE RIGHT EXCEL FILE AND LOOK AT THE RIGHT ROW ONCE YOU HAVE ENTERED THE 3 VALUES.
(in the picture, this is for the Pimax Dream Air only)

ONCE YOU HAVE ENTERED THE 3 VALUES, YOU NEED TO CHOOSE YOUR SUPERSAMPLING AND ENTER IT IN THE TOOLKIT
(for example, if I choose 160%, I will enter these values in the toolkit: 6421x3883)

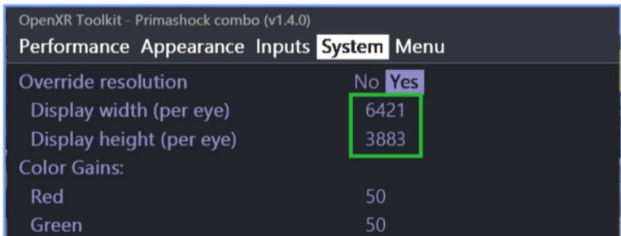

1.00	100%	5076	3070	47	-4,08%
1,02	105%	5201	3146	48	-2,04%
1.05	110%	5324	3220	49	0,00%
1,07	115%	5443	3292	50	2,04%
1,10	120%	5560	3363	51	4,08%
1,12	125%	5675	3433	52	6,12%
1,14	130%	5787	3500	53	8,16%
1,16	135%	5898	3567	54	10,20%
1,18	140%	6006	3633	55	12,24%
1,20	145%	6112	3697	56	14,29%
1,22	150%	6217	3760	57	16,33%
1,24	155%	6319	3822	58	18,37%
1,26	160%	6421	3883	59	20,41%
1,28	165%	6520	3944	60	22,45%
1,30	170%	6618	4003	61	24,49%
1,32	175%	6715	4061	62	26,53%
1,34	180%	6810	4119	63	28,57%
1,36	185%	6904	4176	64	30,61%
1,38	190%	6997	4232	65	32,65%
1,40	195%	7088	4287	65	32,65%
1,41	200%	7178	4342	66	34,69%
1,43	205%	7268	4396	67	36,73%
1,45	210%	7356	4449	68	38,78%
1,47	215%	7443	4502	69	40,82%
1,48	220%	7529	4554	70	42,86%
1,50	225%	7614	4605	70	42,86%

To start, try the 2 values highlighted in yellow that will appear in your Excel file. For example, start with the 0.00% value (in this case 5324x3220) and go up step by step depending on your graphics card and your PC.

In summary

1. Type the 3 values into the green-framed area
2. Choose your resolution
3. Note down the 6 crop numbers and the 2 resolution numbers

Up	70%	31,20
On	90%	40,10
Left Left (LL)	99%	54,50
DO NOT CHANGE LR / RL / RR — THEY ARE CALCULATED AUTOMATICALLY.		
Left Right	99%	44,86
Right Left (RL)	99%	44,86
Right Right (RR)	99%	54,50



0,97	95%	4947	2992	46	-6,12%
1,00	100%	5076	3070	47	-4,08%
1,02	105%	5201	3146	48	-2,04%
1,05	110%	5324	3220	49	0,00%
1,07	115%	5443	3292	50	2,04%
1,10	120%	5560	3363	51	4,08%
1,12	125%	5675	3433	52	6,12%
1,14	130%	5787	3500	53	8,16%
1,16	135%	5898	3567	54	10,20%
1,18	140%	6006	3633	55	12,24%
1,20	145%	6112	3697	56	14,29%
1,22	150%	6217	3760	57	16,33%
1,24	155%	6319	3822	58	18,37%
1,26	160%	6421	3883	59	20,41%
1,28	165%	6520	3944	60	22,45%
1,30	170%	6618	4003	61	24,49%
1,32	175%	6715	4061	62	26,53%
1,34	180%	6810	4119	63	28,57%
1,36	185%	6904	4176	64	30,61%
1,38	190%	6997	4232	65	32,65%
1,40	195%	7088	4287	65	32,65%
1,41	200%	7178	4342	66	34,69%
1,43	205%	7268	4396	67	36,73%
1,45	210%	7356	4449	68	38,78%
1,47	215%	7443	4502	69	40,82%
1,48	220%	7529	4554	70	42,86%
1,50	225%	7614	4605	70	42,86%

Next step: enter these values in the toolkit

(don't worry, you will be able to test and adjust your values as you wish directly in game with the toolkit; you will see black bars when you apply a crop that is too aggressive, for example)


Open the game and open the toolkit now

8. Toolkit configuration

→ restart the game and the toolkit

→ Under Performance: set CAS with Size 100%. Set Sharpness according to the results you get in game (so test it in game; I sometimes set it to 0%, sometimes 20% and sometimes 75% depending on the game, so it is up to you)

→ set Turbo mode to **ON**

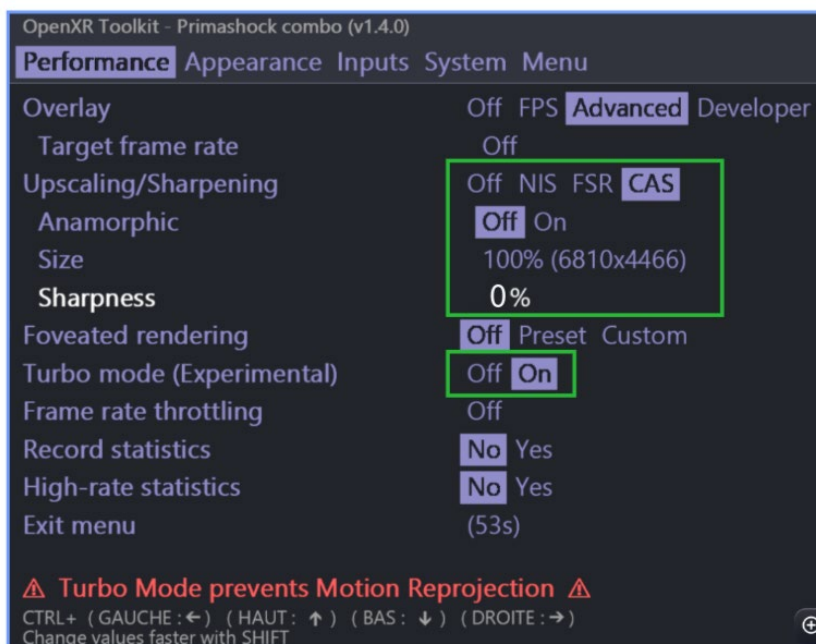


Then we move on to the part we are most interested in: the CROP

ENTERING THE CROP

- Go to “System”
- enter the 6 crop values
- set **“override resolution” to YES**
- enter the 2 values in “override resolution” (width and height)
- do not touch the values in the red box (whatever values are shown there), and **NEVER** click APPLY
- (if you clicked apply and confirmed by mistake, reset the toolkit again and restart everything to be safe)

Reminder: do not touch anything in the red boxes

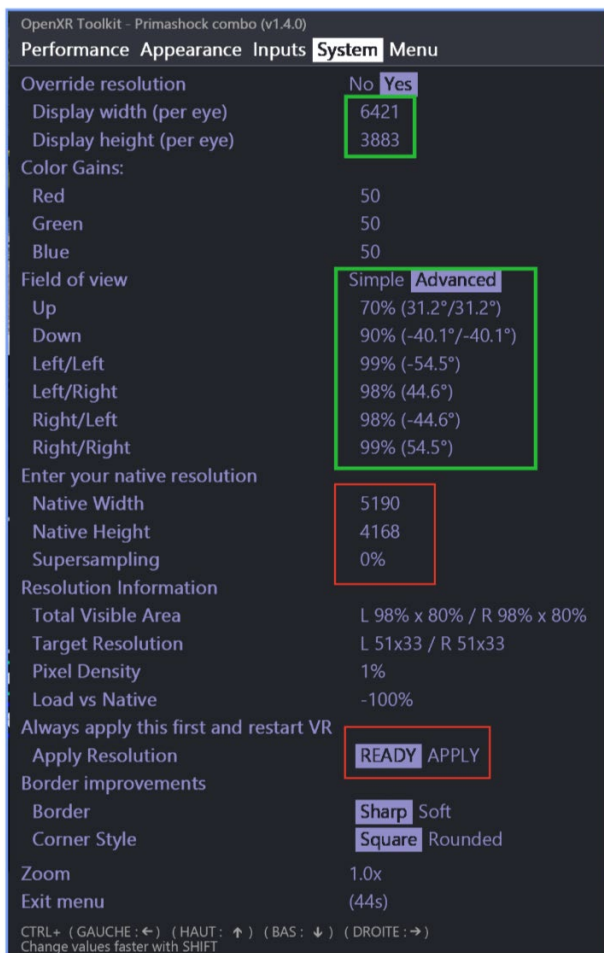

- close the toolkit via “exit menu”
- restart the game and everything should be fine

A few additional notes

- A. I leave the **3D boost** at 0 for my part (also recommended by ElHydro)
- B. The **SBOYS 3** drivers must **absolutely** be disabled (the distortion profiles do not match the values in the Excel file well)
- C. in Pimax Play I have quality set to 1.0
- D. **Sun Glasses: ON (Light)**: Essential setting recommended by ElHydro on the Dream Air's OLED panels to remove the dull haze and open up the blacks; test it yourself, on some games I prefer to disable it (in Appearance, post processing ON)
- E. **Vibrance: 15 to 25**: To compensate for the flat colorimetry and boost the contrast of the kerbs and the track (in Appearance, post processing ON)
- F. Turn off smart smoothing in Pimax Play
- G. **The magic anti-aliasing combo: NVIDIA MFAA + MSAA 2x in game**
It is one of the secret pillars of the ElHydro method to get an ultra-sharp image without hurting performance:
 - **In the NVIDIA Control Panel**: Go to *Manage 3D settings* > select your game (or the global settings) and set **Multi-Frame Sampled AA (MFAA)** to **On**.
 - **In the game's graphics settings (e.g. AMS2)**: Set anti-aliasing to **MSAA 2x (Low/Medium)** and make sure you disable **Post-Processing Anti-Aliasing (Off)**.

Why this setting? NVIDIA's MFAA hardware technology combines temporal samples to automatically turn MSAA 2x into rendering equivalent to **MSAA 4x**, while keeping the negligible performance cost of 2x. Disabling Post-Processing AA avoids applying a destructive software blur filter.

H.

You need to test and play with the size of the crop and the supersampling (values in override resolution) to find the right balance, especially in terms of fps.

In any case, I am giving you the process, but the values are often personal, depending on your own taste and your PC; results in terms of fps or quality may vary.

This mod was made for free by **Elhydro**, to thank him you can make a donation here, thanks in advance: <https://www.buymeacoffee.com/Elhydro>

9. Adding the Helmet Overlay

This system adds a realistic helmet overlay inside VR, creating the feeling of actually looking through a racing helmet instead of simply seeing the game through the headset.

At the moment, this setup is built around a system developed by **@elydro**, which is based on PrimaShock. PrimaShock itself was created by another developer: @elydro adapted the PrimaShock system through his converter, which makes it possible to calculate the correct resolution corresponding to the desired FOV crop. The helmet itself is then added and controlled through Le Dour's OpenXR layer.

1. Install the PrimaShock-based system first

Before installing the helmet overlay, your PrimaShock-based setup (ElHydro method, sections 1 to 8 above) must already be installed and working correctly.

For this helmet system, the recommended starting crop is:

- Top crop: 20%
- Bottom crop: 24.9%

These values work very well as a general starting point and adapt nicely to many different helmet designs.

IMPORTANT: calculate the correct resolution

When changing the crop to 20% top / 24.9% bottom, you also need to change the rendering resolution accordingly. Use **@elydro's** converter (the Excel file) to calculate the correct resolution for this crop. Once the converter gives you the new resolution, enter that resolution in OpenXR Toolkit, following the same procedure explained above (sections 6 to 8).

So the basic process is:

- Set the crop to 20% top / 24.9% bottom.
- Use @elydro's converter to calculate the corresponding resolution.
- Enter the calculated resolution into OpenXR Toolkit, exactly as explained above.
- Once the crop and resolution are correctly configured, proceed with the helmet overlay installation.

2. Install Le Dour's OpenXR layer

Download Le Dour's OpenXR FOV Crop / Helmet Overlay layer here:

Le Dour – Latest GitHub Release

<https://github.com/mledour/OpenXR-Layer-crop-fov/releases/latest>

The easiest method is to use the installer. The program itself is normally installed in:


C:\Program Files\OpenXR-Layer-crop-fov

If you download the ZIP version instead, extract the files to a permanent folder and follow the included installation instructions.

The configuration files that we actually need to edit are located here:

%LOCALAPPDATA%\XR_API_LAYER_MLEDOUR_fov_crop\

You can simply paste that path into the Windows Explorer address bar.

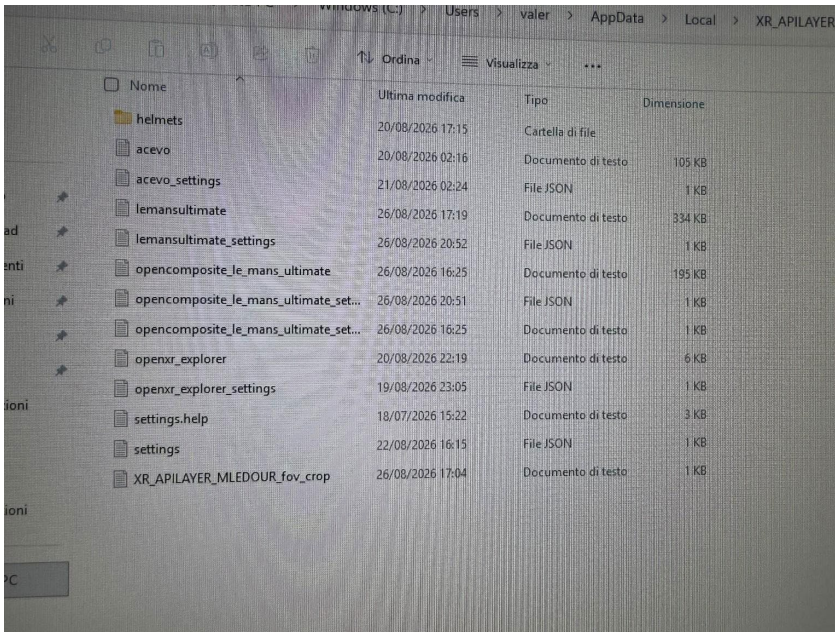

Screenshot 1 – The configuration folder, including the helmets folder, settings.json, and the per-game configuration files created automatically.


Inside this folder you will find:

- settings.json
- the helmets folder
- individual configuration files created for each game you launch

The first time you install the system, start by editing **settings.json**. After you launch a game for the first time, Le Dour automatically creates a separate configuration file for that game: every game can therefore have its own helmet configuration.

3. Enable the system

Open **settings.json**, or the specific **<game>_settings.json** file after it has been created.

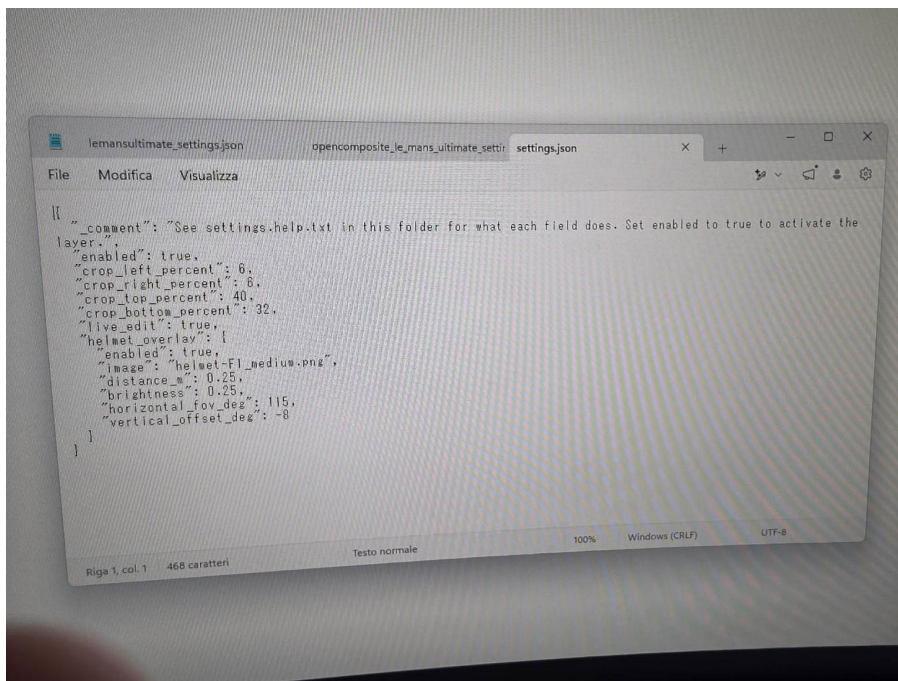

Screenshot 2 – The general settings.json file. The crop values shown here were used during testing only.

At the beginning of the file, make sure you have:

```
"enabled": true
```

Then, inside the `helmet_overlay` section, you must also have:

```
"enabled": true
```

If either of these is set to `false`, the helmet overlay will not work.

For live editing, it is also recommended to have:

```
"live_edit": true
```


This allows you to change the helmet position and size while the game is running.

4. IMPORTANT: set all Le Dour crop values to 0

Because the crop is already handled by the PrimaShock-based system, we do not want Le Dour to apply a second crop on top of it. Every crop value inside Le Dour's JSON file must therefore be set to 0. For example:

```
"crop_left_percent": 0,  
"crop_right_percent": 0,  
"crop_top_percent": 0,  
"crop_bottom_percent": 0
```

IMPORTANT: in the screenshot below you may see other numbers in these fields — ignore them, they were used during testing. For this setup, all Le Dour crop values must be 0 so that the two cropping systems do not overlap.

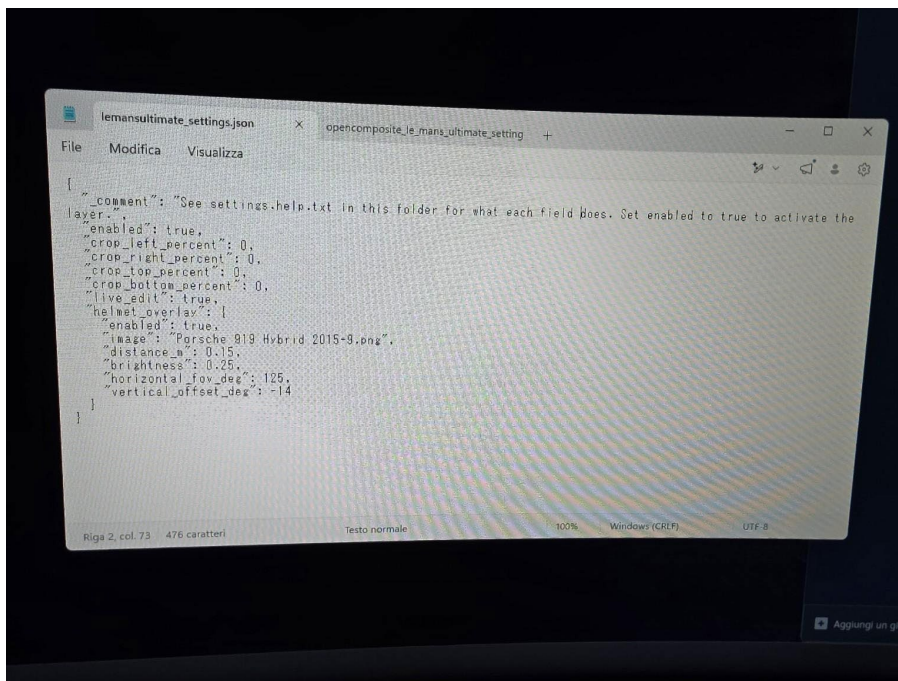

Screenshot 3 – A per-game configuration file with the crop values set to 0 and a custom helmet PNG selected.

5. Adjusting the helmet

The three main settings you will use are:

```
"distance_m": 0.15,  
"horizontal_fov_deg": 125,  
"vertical_offset_deg": -14
```

These values are extremely personal. There is no single perfect configuration because it depends on your headset, your eyes, the helmet design, and how close you want the helmet to feel.

Distance

distance_m controls how close the helmet is to your eyes. Lower number = helmet closer to your face. For example:

- 0.25 → farther away
- 0.15 → much closer and more realistic
- 0.10 / 0.09 / 0.08 → extremely close

However, if you go below approximately 0.10, the helmet cheek pads can become very close together and can almost overlap in the center of your vision.

Horizontal FOV

horizontal_fov_deg controls how wide the helmet appears. If the cheek pads become too close together after reducing the distance, increase the horizontal FOV: this pushes the sides of the helmet farther apart. However, increasing the FOV also increases the overall apparent size of the visor opening vertically, so distance and FOV need to be adjusted together.

Vertical offset

`vertical_offset_deg` moves the helmet vertically. More positive = helmet moves upward, more negative = helmet moves downward. Adjust this until the visor opening is positioned naturally around your eyes.

6. Reference personal settings

As a reference, the author of the guide currently uses:

```
"distance_m": 0.15,  
"horizontal_fov_deg": 125,  
"vertical_offset_deg": -14
```

He recommends trying these values first and then adjusting them according to your preference. Do not assume these settings will be perfect for everyone: distance, FOV and vertical offset are very personal, so experiment until the helmet feels natural to you.

7. Live editing

With `live_edit: true`, you can leave the game running while editing the JSON file. Change a number and then either save the file normally or press **Ctrl + S**. The modification is applied directly while you are inside VR. This makes it very easy to fine-tune distance, horizontal FOV and vertical offset without restarting the game every time.

The only change that is not applied live is the helmet design/image itself.

8. Installing additional helmet designs

Le Dour includes only a few basic helmet PNGs by default. Put the helmet PNG that you want to use inside:

```
%LOCALAPPDATA%\XR_API_LAYER_MLEDOUR_fov_crop\helmets\
```

Then open the JSON file for the game you are using. Inside the `helmet_overlay` section you will see something similar to:

```
"image": "helmet-F1_medium.png"
```

To change the helmet, replace only the filename. For example, if your PNG file is called `Ferrari 488 GTE.png`, then the JSON must say:

```
"image": "Ferrari 488 GTE.png"
```

The filename must match the actual PNG filename exactly, including spaces, capital letters and `.png`. Do not add extra characters, do not remove quotation marks, do not add or remove commas, and do not change the JSON structure. The safest method is simply to copy and paste the exact PNG filename.

Changing the helmet image/design is not live: after changing the PNG filename, save the file and restart the game for the new helmet to appear.

9. Very important JSON warning

Do not change the structure of the JSON file. Only modify the values that you actually need:

- true / false where instructed
- crop numbers
- distance
- FOV
- offset
- helmet PNG filename

Everything else should remain exactly as it was. If you accidentally delete a comma, quotation mark, bracket, or add a space in the wrong place, the system may stop working. When changing helmets, the safest option is therefore to copy and paste the exact PNG filename.

The most important thing is to experiment. Helmet distance, FOV and vertical position are highly personal: a helmet that looks perfect to one person may feel too close, too wide or too low to somebody else. A good starting point is:

```
"distance_m": 0.15,  
"horizontal_fov_deg": 125,  
"vertical_offset_deg": -14
```

Then tune it live until it looks and feels natural. Once properly adjusted, the combination of @elydro's PrimaShock-based setup and Le Dour's helmet overlay creates a much more realistic VR experience and makes it feel significantly closer to actually sitting inside the car wearing a real racing helmet.

10. Final examples

Below are three examples showing how the helmet overlay can look once everything has been configured correctly.



Final example 1 – forward cockpit view with the helmet overlay correctly positioned.



Final example 2 – close cockpit / steering wheel view showing the helmet overlay in use.



Final example 3 – angled cockpit view showing the overlay effect from another perspective.