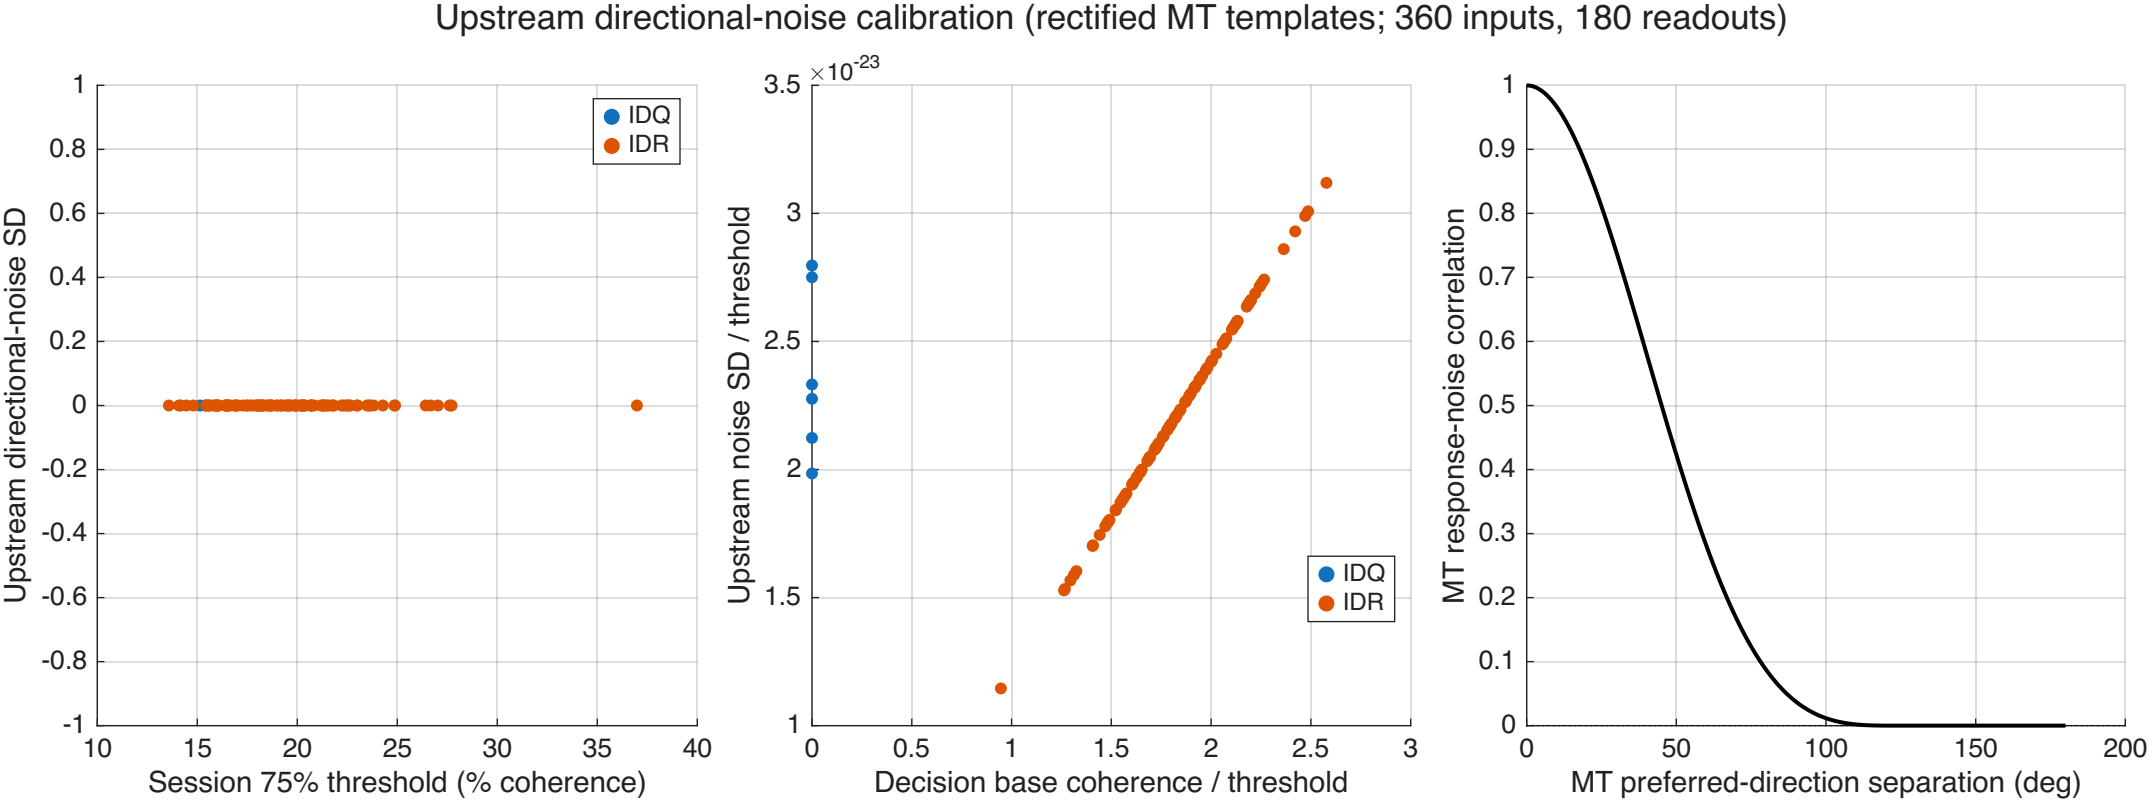
Upstream directional-noise calibration (rectified MT templates; 360 inputs, 180 readouts)
Upstream directional-noise SD
Session 75% threshold (% coherence)
IDQ
IDR
Upstream noise SD / threshold
×10^-23
Decision base coherence / threshold
IDQ
IDR
MT response-noise correlation
MT preferred-direction separation (deg)