e1-6 Vertex Correction, Selection

M. Ungaro, K. Joo

October 7, 2016

Abstract

This document describes the track vertex correction and selection procedure. The track vertices of all particles are corrected. A selection on the electron and proton z-vertexes and their differences is applied.

Contents

1 Vertex Correction, Selection **2**

1.1 Beam Offset 2

1.2 Vertex Correction, Cut 3

1 Vertex Correction, Selection

In the reconstruction software the track vertex (x, y, z) is calculated from its intersection with the sector midplane[1] of the corresponding sector. This procedure involve the assumption that the beam is centered along the z-axis. During the e1-6 experiment however the beam was not centered at $(x, y) = (0, 0)$ thus a sector-dependent offset is introduced in the vertex calculation.

1.1 Beam Offset

The displacement of the beam can be seen in Fig. 1, where the events on the window[2] downstream of the target were selected to fix the z position as reference. The calculated displacement [1] for the beam position is:

$$\begin{aligned} x_0 = & \quad 0.090 \quad cm \\ y_0 = & \quad -0.345 \quad cm \end{aligned}$$

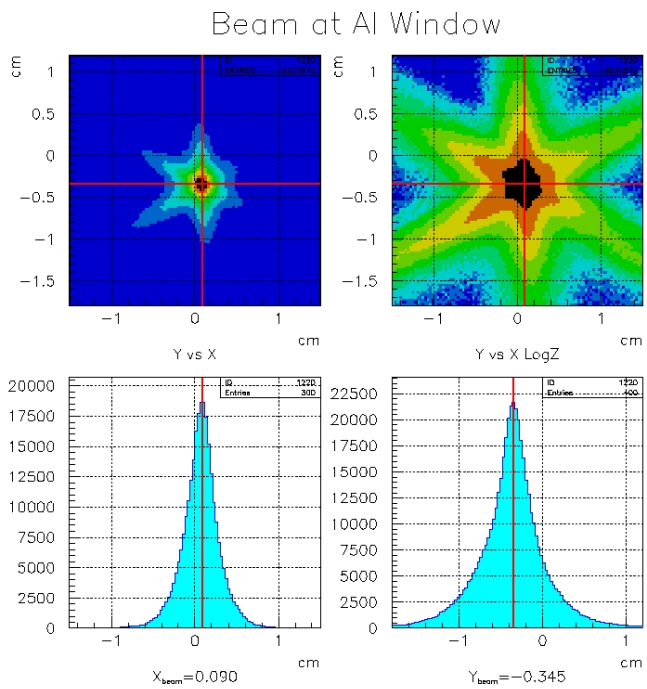

Figure 1: Top: y versus x position of the vertex at the window. Upper right: same as upper left, except plotted logarithmically. One can see that the beam spot was slightly shifted from $(0, 0)$. Bottom: the x (left) and y (right) distributions which led to the calculation: $(x_0, y_0) = (0.09, -0.345)cm$

[1] The midplane of a sector is defined by the plane that divide that sector in half and contains the beamline $(0, 0, z)$.

[2] A window was placed at $z = +0.5$ cm to help these kind of studies and to be a z-position reference.

1.2 Vertex Correction, Cut

To correct the vertex position it is sufficient to shift the midplanes so that they contain the correct beamline $(0.09, -0.345, z)$ and recalculate the intersection of the tracks with the new planes. This is illustrated in Fig.2.

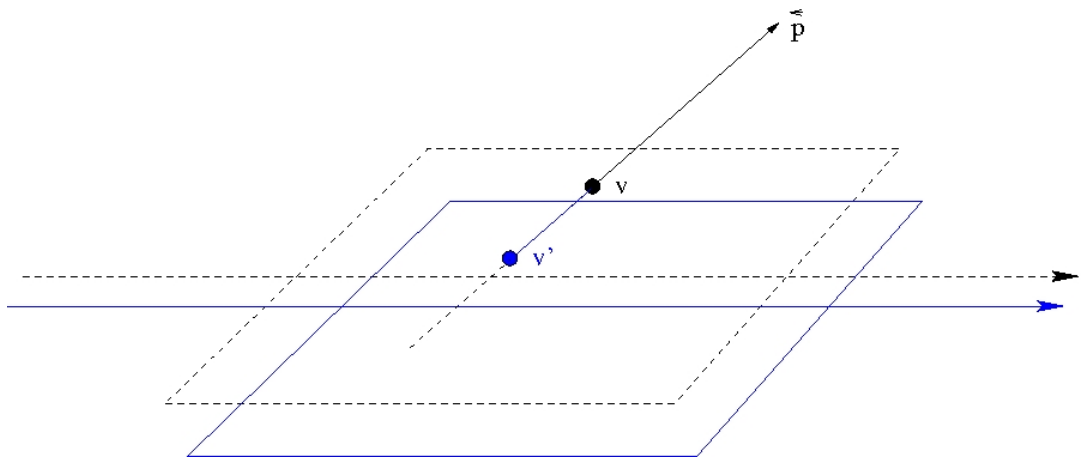

Figure 2: The vertex correction. The dashed plane is the original midplane containing the wrong beamline $(0, 0, 0)$. The point v is the intersection of the track (straight line along momentum $\vec{p}$) with this plane. The solid blue plane represents the corrected midplane containing $(0.09, -0.345, z)$. The correction algorithm simply intersects the same track with the corrected midplane.

The effect of the correction on the electrons and protons z position is shown in Fig. 3. After this correction, the vertex position resolution is good enough to introduce a cut on the z vertex of electron and protons in order to select events inside the target cell as follows:

$$-8\,cm \leq z \leq -0.8\,cm \tag{1}$$

The electron and proton vertices are also required to be coincident along the z axis within the reconstruction resolution, so an additional cut on $\Delta z = z_{electron} - z_{proton}$ is applied:

$$|\Delta z| < 3\,cm \tag{2}$$

The effect of the corrections and the values of the cuts are illustrated in Fig. 3 and Fig. 4.

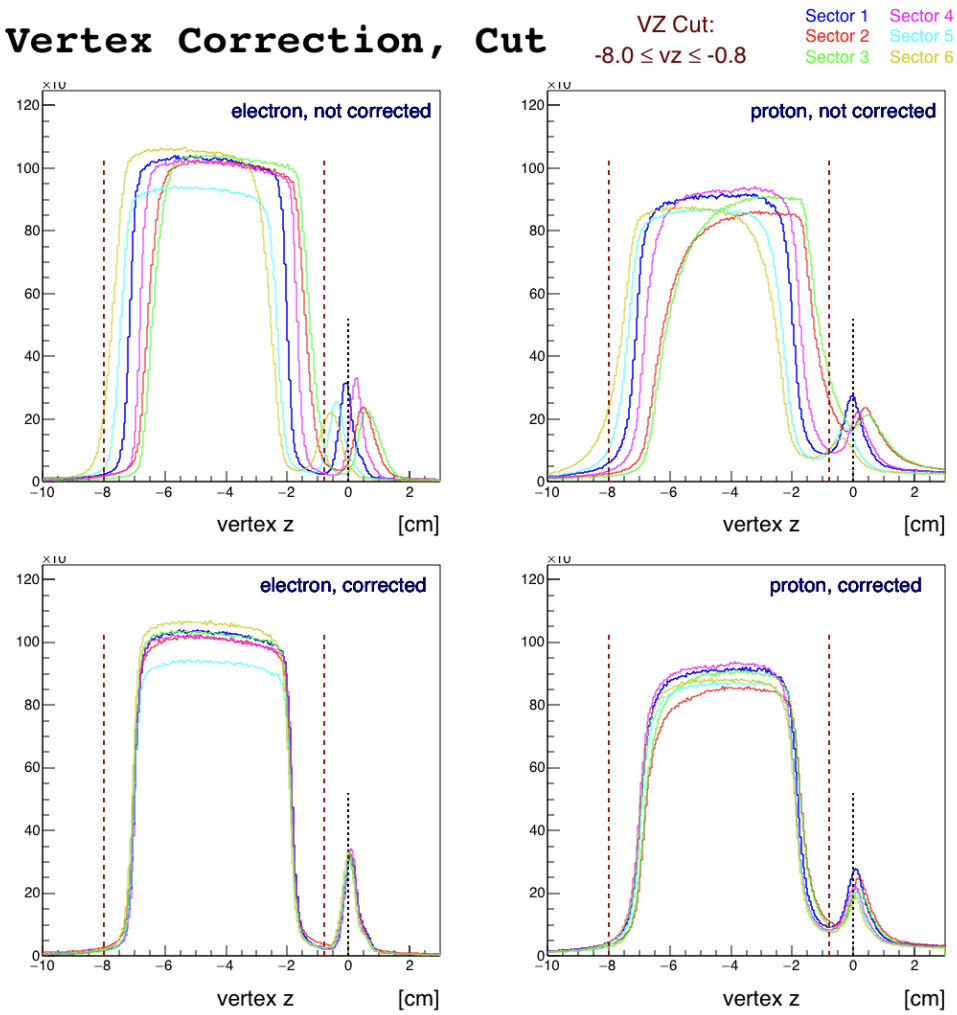

Figure 3: The effect of the correction on the electrons and protons z distributions for each sector. Top row: electron and proton z vertices, uncorrected. Bottom row: same distributions after the vertex correction. Vertical red lines: cuts of eq.1.

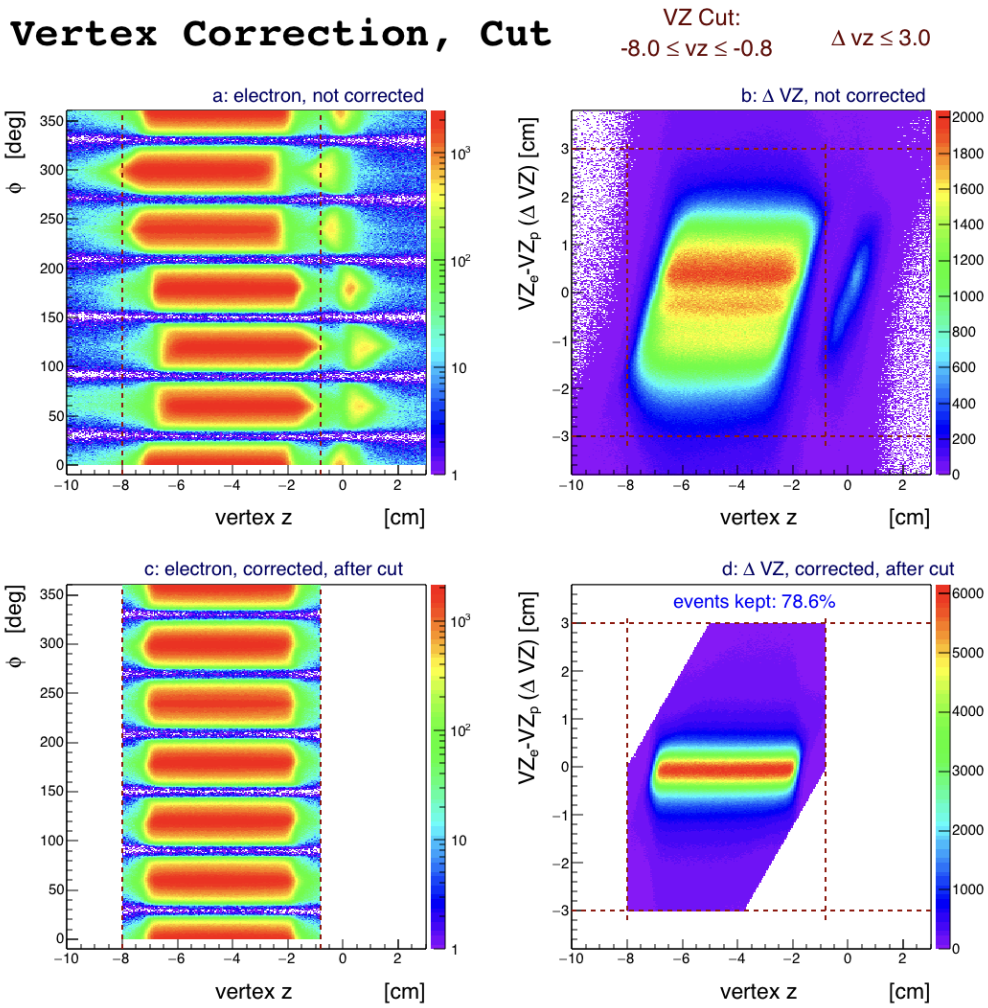

Figure 4: Top left: Δz versus $\phi_{electron}$, uncorrected. The typical sinusodial behaviour as a function of sector is indicative of the beam displacement. Bottom left: same distributions, after the vertex correction. Top right: Δz versus $VZ_{electron}$, uncorrected. Bottom right: same distributions, after the vertex correction. Vertical red lines: cuts of eq.1. Horizontal red lines: cuts of eq.2.

References

[1] Valeri Koubarovski, *Private Communication.*