



POWER SUPPLY

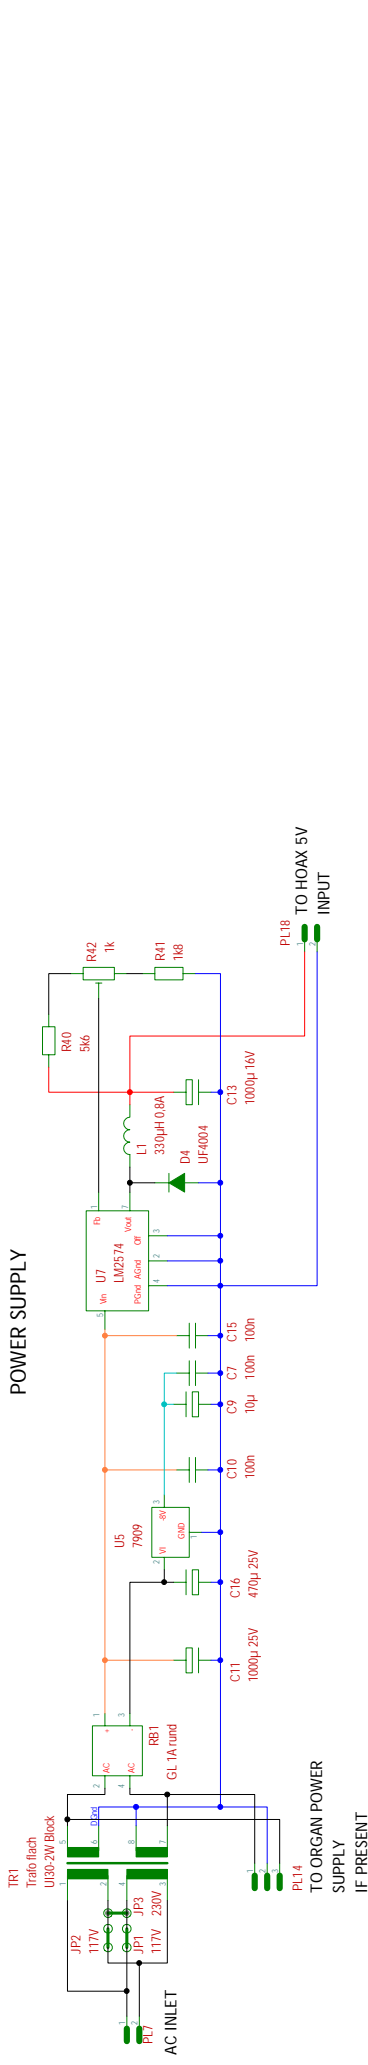

HOAX LDR Swell and Leslie I/F

#1.2 (cm)

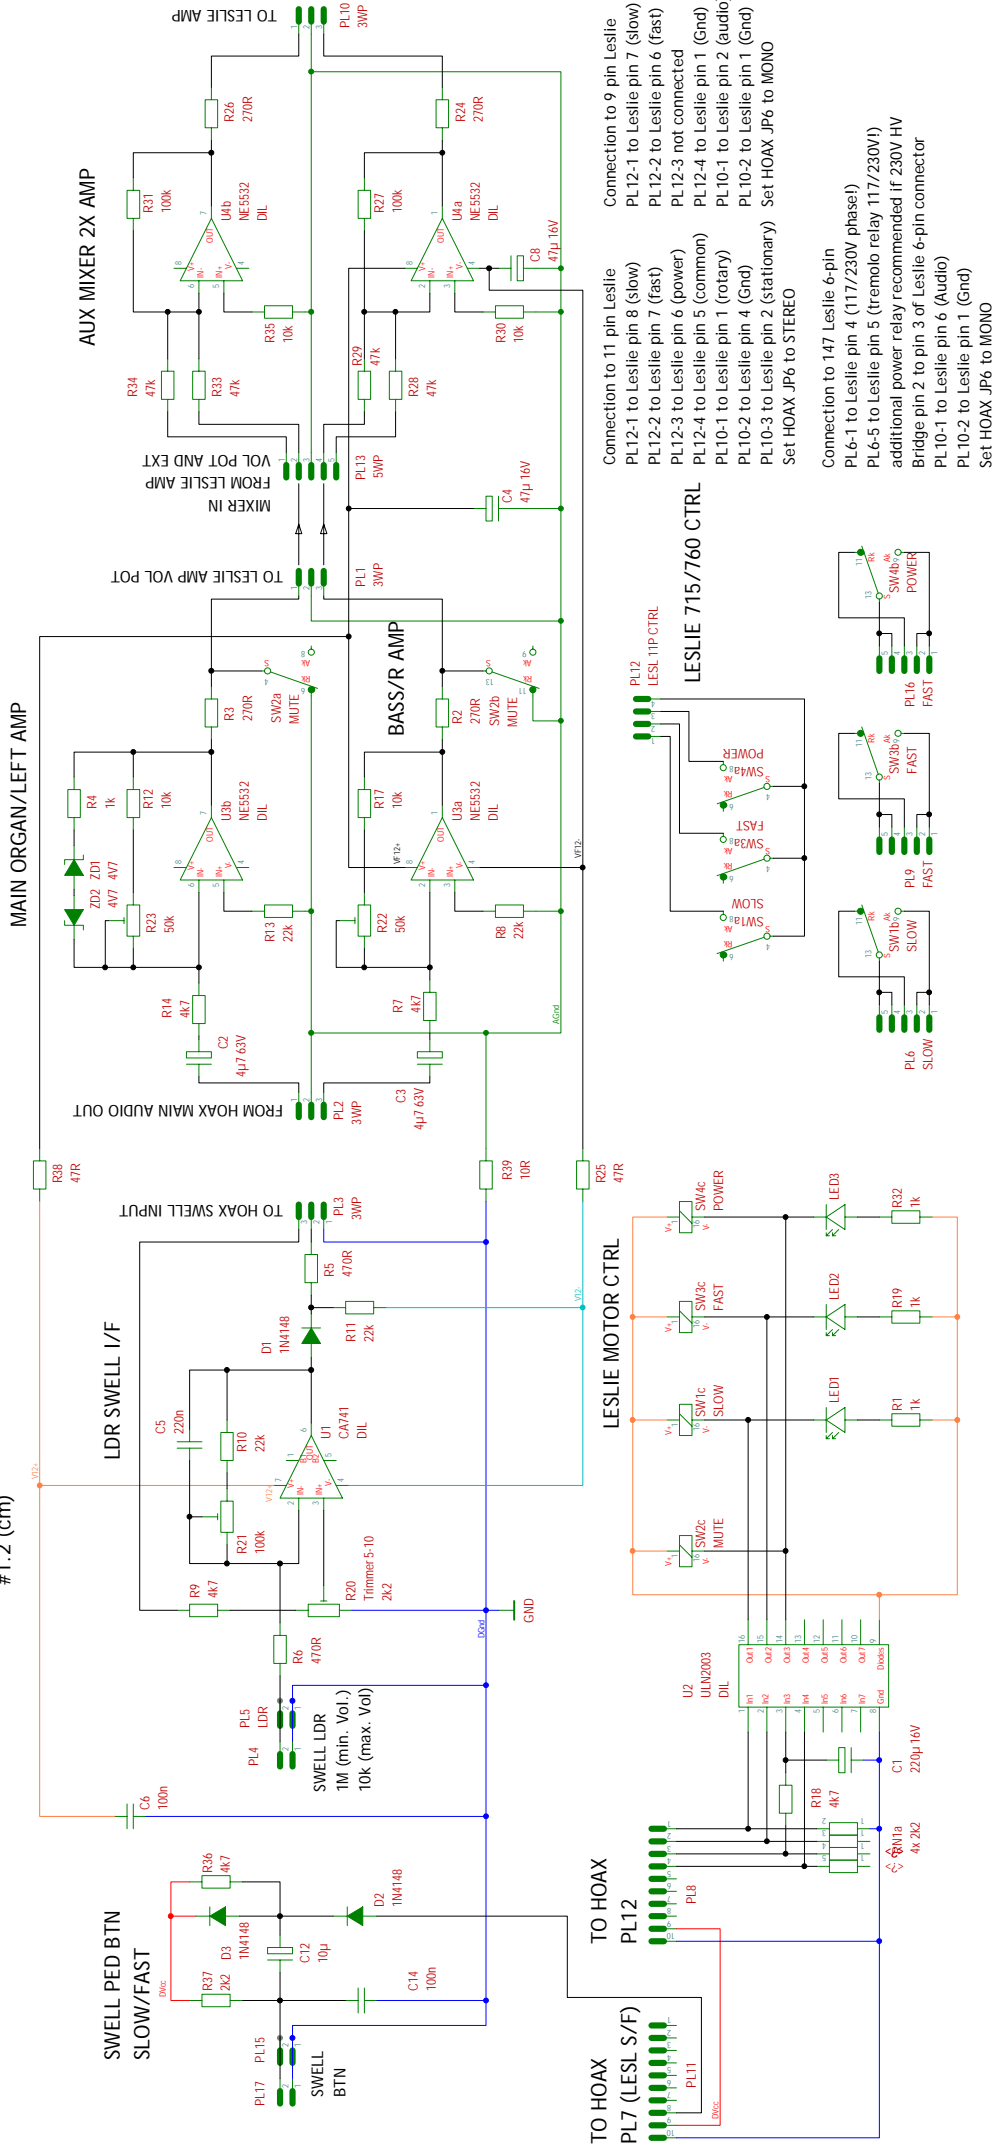

Connection to 9 pin Leslie
 PL12-1 to Leslie pin 7 (slow)
 PL12-2 to Leslie pin 6 (fast)
 PL12-3 not connected
 PL12-4 to Leslie pin 1 (Gnd)
 PL10-1 to Leslie pin 1 (rotary)
 PL10-2 to Leslie pin 4 (Gnd)
 PL10-3 to Leslie pin 2 (stationary)
 Set HOAX JP6 to MONO

Connection to 11 pin Leslie
 PL12-1 to Leslie pin 8 (slow)
 PL12-2 to Leslie pin 7 (fast)
 PL12-3 to Leslie pin 6 (power)
 PL12-4 to Leslie pin 5 (common)
 PL10-1 to Leslie pin 1 (rotary)
 PL10-2 to Leslie pin 4 (Gnd)
 PL10-3 to Leslie pin 2 (stationary)
 Set HOAX JP6 to STEREO

Connection to 147 Leslie 6-pin
 PL6-1 to Leslie pin 4 (117/230V phase)
 PL6-5 to Leslie pin 5 (tremolo relay 117/230V)
 additional power relay recommended if 230V HV
 Bridge pin 2 to pin 3 of Leslie 6-pin connector
 PL10-1 to Leslie pin 6 (Audio)
 PL10-2 to Leslie pin 1 (Gnd)
 Set HOAX JP6 to MONO