Commercial Products Master Prices

30MP
017-080
60 Hz

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE
staSHIPPING POINT: CHARLOTTE, NC
NEAREST PORT OF EMBARKATION: SAVANNAH, GA

TYPE OF SALE: 1606 (USA & Canada)
TYPE OF SALE: 1606 (Export)

F.O.B. SHIPPING POINT
FREIGHT PREPAID

30MP WATER COOLED SCROLL COMPRESSION LIQUID CHILLERS



AQUASNAP®

The 30MP water cooled chiller has a compact design and is delivered as a complete package for easy installation.

30MP FEATURES AND ACCESSORIES

Refrigeration Circuit	30MPW 017-080	30MPQ 021-080	30MPA 021-080
Rotary Scroll Compressors	Std	Std	Std
Compressor Protection	Std	Std	Std
Digital Scroll Option (excludes 051-080 sizes)	FIOP	FIOP	FIOP
Electronic Expansion Valves	Std	Std	Std
Moisture Indicating Sight Glass and Filter Drier	Std	Std	Std
Liquid Line Solenoid Valve	N/A	N/A	Std
Liquid Line Isolation Valve	N/A	N/A	Std
High Pressure Switch	Std	Std	Std
Hot Gas Bypass	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Heat Recovery	Std	Std	Std
Medium Temperature Brine (15-32F, -9 -0C)	FIOP	FIOP	FIOP
Heat Pump Controls (up to 140F, 60C)	N/A	Std	N/A
Chilled Fluid Thermal Dispersion Flow Switch	Std	Std	Std
Chilled Fluid Temperature Sensors	Std	Std	Std
Condenser water temperature sensors	Accy	Std	N/A
Water Access Port (PETE's Port)	Std	Std	Std
Brazed Plate Evaporator	Std	Std	Std
Evaporator Insulation	Std	Std	Std
Evaporator Strainer (40 mesh, shipped loose)	ACCY	ACCY	ACCY
Brazed Plate Condenser	Std	Std	N/A
Condenser Strainer (40 mesh, shipped loose)	ACCY	ACCY	N/A
Water Manifold Piping	FIOP	FIOP	FIOP
Manifold Victaulic Spacer Fitting Kit	ACCY	ACCY	ACCY
Head Pressure Control	FIOP	N/A	N/A
Evaporator Isolation	FIOP	FIOP	N/A

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

Controls / Communication	30MPW 017-080	30MPQ 021-080	30MPA 021-080
SmartVu® PIC 6 Touchscreen Controls	Std	Std	Std
Energy Management Module (EMM)	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Chilled Water Temperature Reset from Return Fluid	Std	Std	Std
Chilled Water Temperature Reset from 4-20mA signal (EMM Required)	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Demand Limit (EMM Required)	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Alarm Contacts	Std	Std	Std
Temperature & Pressure Display	Std	Std	Std
Low Chilled Fluid Temperature Protection	Std	Std	Std
Low Pressure Protection	Std	Std	Std
Anti-Cycling Protection	Std	Std	Std
Dual Chiller Control	Std	Std	Std
Evaporator and Condenser Pump Relay	Std	Std	Std
CCN Communication Capability	Std	Std	Std
LON Translator Control	Accy	Accy	Accy
BACnet IP or MS/TP	Std	Std	Std
Modbus	Std	Std	Std
Service Option - RJ45 port	Std	Std	Std
Heat Pump Controls (up to 140F, 60C)	N/A	Std	N/A
Multi-Unit Controller	Accy	Accy	Accy

Std — Standard Feature
FIOP — Factory-Installed Option
Accy — Field-Installed Accessory
N/A — Not Available

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

Electrical	30MPW 017-080	30MPQ 021-080	30MPA 021-080
Single Point Primary Power Entry	Std	Std	Std
Control Transformer for Single Point Power and Controls	Std	Std	Std
Across The Line Compressor Start	Std	Std	Std
Terminal Block	Std	Std	Std
Unit Mounted Main Disconnect, Non-fused	FIOP	FIOP	FIOP
On-Off Switch (Emergency shut-off)	Std	Std	Std
High Interrupt	FIOP	FIOP	FIOP
30MPE Electrical Distribution Panel	FIOP	FIOP	FIOP

Packaging	30MPW 017-080	30MPQ 021-080	30MPA 021-080
R-32 Refrigerant Charge	Std	Std	N/A
Nitrogen Charge (30MPW only)	FIOP	FIOP	Std
Factory Run test (only when ordered with factory charge of R-32 refrigerant)	Std	Std	N/A
Mobility Kit (wheels) (shipped loose)	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Vibration Isolation Pads	Accy	Accy	Accy
Vibration Isolation (springs)	Accy	Accy	Accy
Compressor Sound Blanket	FIOP	FIOP	FIOP
Height adjustment Kit (shipped loose)	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Bag for shipment	Std	Std	Std
Crate for shipment	FIOP	FIOP	FIOP
Compressor Thermal Insulation	FIOP/ACCY	FIOP/ACCY	FIOP/ACCY
Insulated Compressor Sound Blanket	FIOP	FIOP	FIOP
Sound Enclosure Panels	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY
Water Manifold Sound Enclosure Panels	FIOP / ACCY	FIOP / ACCY	FIOP / ACCY

Std — Standard Feature
FIOP — Factory-Installed Option
Accy — Field-Installed Accessory
N/A — Not Available

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

MODEL NUMBER NOMENCLATURE

Position	1-4	5	6-8	9	10	11	12	13	14	15	16
Description	**30MP**	**W**	**017**	**6**	**0**	**-**	**0**	**0**	**0**	**0**	**5**

Water-Cooled AquaSnap Chiller

Condenser option[1]

A Std. without condenser
W Std with condenser
Q Heat Pump

Nominal Capacity

017 021 031 033 041 046 051 056
066 080

Voltage Options

1 = 575-3-60
2 = 380-3-60
5 = 208/230-3-60
6 = 460-3-60

Sound/Mounting Options

Unit Design Revision

Water Manifold/Brine option

Capacity Control

Disconnect option

Controls / Communication Options

Packaging Options

[1] = Models 017 & 033 are available for 30MPW only

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

MODEL NUMBER NOMENCLATURE DEFINITION

Sound/Mounting (Position 10)

0 = No options (Std)
1 = Sound Enclosure Panels (no Manifold)
2 = Sound Enclosure Panels (with Manifold)
3 = Height adjustment Kit
4 = Height adjustment Kit & Sound Enclosure Panels (no Manifold)
5 = Height adjustment Kit & Sound Enclosure Panels (with Manifold)
9 = Mobility Kit (wheels)
B = Mobility Kit (wheels) & Sound Enclosure Panels (no Manifold)
C = Mobility Kit (wheels) & Sound Enclosure Panels (with Manifold)
D = Height adjustment Kit and Mobility Kit (wheels)
F = Height adjustment Kit, Mobility Kit (wheels), & Sound Enclosure Panels (no Manifold)
G = Height adjustment Kit, Mobility Kit (wheels), & Sound Enclosure Panels (with Manifold)
L = Compressor Sound Blanket
M = Mobility Kit (wheels) & Compressor Sound Blanket
N = Height Adjustment kit & Compressor Sound Blanket
P = Height Adjustment Kit, Mobility (wheels) & Compressor Sound Blanket
Q = Insulated Compressor Sound Blanket
R = Mobility Kit (wheels) Insulated Compressor Sound Blanket
S = Height Adjustment Kit, Insulated Compressor Sound Blanket
T = Mobility Kit (wheels), Height Adjustment Kit, Insulated Compressor Sound Blanket

Unit Design Revision (Position 11)

- =

Comfort Cooling Duty / Medium Temperature Brine option (Position 12)

0 = Comfort Cooling Duty (32-60F LCFT, 0-16C) (Std) with refrigerant charge (MPW) or Nitrogen (MPA)
1 = Water Manifold Piping (Comfort Cooling Duty) with refrigerant charge (MPW/MPQ) or Nitrogen (MPA)
2 = Evaporator Isolation with Water Manifold Piping (Comfort Cooling Duty) with refrigerant charge (MPW) or Nitrogen (MPA)
3 = Head Pressure Control with Water Manifold Piping (Comfort Cooling Duty) with refrigerant charge (MPW)
4 = Head Pressure Control, Evaporator Isolation with Water Manifold Piping (Comfort Cooling Duty) with refrigerant charge (MPW)
5 = Water Manifold Piping (Medium Temperature Brine (15-32F, -9-0C)), Evaporator Isolation with refrigerant charge (MPW) or Nitrogen (MPA)
6 = Water Manifold Piping (Medium Temperature Brine), Head Pressure Control with refrigerant charge (MPW)
7 = Medium Temperature Brine with refrigerant charge (MPW) or Nitrogen (MPA)
8 = Water Manifold Piping (Medium Temperature Brine) with refrigerant charge (MPW/MPQ) or Nitrogen (MPA)
9 = Head Pressure Control, Evaporator Isolation with Water Manifold Piping (Medium Temperature Brine) with refrigerant charge (MPW)
A = Water Manifold Piping (Medium Temperature Brine) & Condenser Isolation & Refrigerant Charge (MPQ)
B = Comfort Cooling Duty (32-60F LCFT, 0-16C) (Std) with Nitrogen Charge (MPW)
C = Water Manifold Piping (Comfort Cooling Duty) with Nitrogen Charge (MPW/MPQ only)
D = Evaporator Isolation with Water Manifold Piping (Comfort Cooling Duty) with Nitrogen Charge (MPW only)
E = Water Manifold Piping (Medium Temperature Brine), Evaporator & Condenser Isolation & Refrigerant Charge (MPQ)
F = Head Pressure Control with Water Manifold Piping (Comfort Cooling Duty) with Nitrogen Charge (MPW only)
G = Head Pressure Control, Evaporator Isolation with Water Manifold Piping (Comfort Cooling Duty) with Nitrogen Charge (MPW only)
H = Medium Temperature Brine (15-32F, -9-0C) with Nitrogen Charge (MPW)
I = Medium Temperature Brine & Nitrogen Charge (MPQ)
J = Water Manifold Piping (Medium Temperature Brine) with Nitrogen Charge (MPW/MPQ only)
K = Evaporator Isolation with Water Manifold Piping (Medium Temperature Brine) with Nitrogen Charge (MPW)
L = Head Pressure Control with Water Manifold Piping (Medium Temperature Brine) with Nitrogen Charge (MPW)
M = Head Pressure Control, Evaporator Isolation with Water Manifold Piping (Medium Temperature Brine) with Nitrogen Charge (MPW)
N = Head Pressure Control (Single Unit) (Comfort Cooling Duty) with refrigerant charge (MPW)
O = Water Manifold Piping (Medium Temperature Brine), Condenser Isolation & Nitrogen Charge (MPQ)
P = Head Pressure Control (Single Unit) (Medium Temperature Brine) with refrigerant charge (MPW)
Q = Head Pressure Control (Single Unit) (Comfort Cooling Duty) with Nitrogen Charge (MPW Only)
R = Head Pressure Control (Single Unit) (Medium Temperature Brine Duty) with Nitrogen Charge (MPW Only)
S = Refrigerant charge (MPQ)
T = Nitrogen charge (MPQ)
U = Water Manifold Piping (Medium Temperature Brine, Evaporator & Condenser Isolation & Nitrogen Charge (MPQ)
V = Water Manifold Piping (Comfort Cooling), Condenser Isolation with refrigerant charge (MPQ)
W = Water Manifold Piping (Comfort Cooling), Condenser Isolation with Nitrogen charge (MPQ)
X = Water Manifold Piping (Comfort Cooling), Evaporator & Condenser Isolation with refrigerant charge (MPQ)
Y = Water Manifold Piping (Comfort Cooling), Evaporator & Condenser Isolation with Nitrogen charge (MPQ)
Z = Medium Temperature Brine & Refrigerant Charge (MPQ)

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

Capacity Control (Position 13)
(Evaporator insulation is standard)
0 = No Hot Gas Bypass (Std)
1 = With Hot Gas Bypass
2 = With Digital Compressor
3 = High Interrupt
4 = High Interrupt & Hot Gas Bypass
5 = High Interrupt & Digital Compressor

Disconnect option (Position 14)

0 = Terminal Block (Std)
1 = With Non-Fused Disconnect
2 = Fused Disconnect
3 = Terminal Block (Std) with Phase Monitor
4 = With Non-Fused Disconnect with Phase Monitor
5 = Fused Disconnect with Phase Monitor

Controls / Communications Options (Position 15)

1 = PIC 6 (Std)
3 = PIC 6 with Edge Remote Connectivity
5 = PIC 6 with EMM
7 = PIC 6 with Edge Remote Connectivity and EMM

Packaging Options (Position 16)

1 = Bag (Std) No Compressor Insulation with Nitrogen Charge (MPW only)
2 = Export Crate No Compressor Insulation with Nitrogen Charge (MPW / MPQ only)
3 = Bag and Compressor Insulation with Nitrogen Charge (MPW only)
4 = Export Crating and Compressor Insulation with Nitrogen (MPW / MPQ only)
5 = Bag (Std) No Compressor Insulation with refrigerant charge (MPW) or Nitrogen (MPA)
7 = Bag and Compressor Insulation with refrigerant charge (MPW) or Nitrogen (MPA)
B = Export Crate and No Compressor Insulation with Nitrogen (MPA)
D = Export Crate and Compressor Insulation with Nitrogen (MPA)

30MPW WATER COOLED LIQUID CHILLING PACKAGES
BASE UNIT WITH NO CRATING

ORDERING NUMBER	POWER SUPPLY	MASTER PRICE
30MPW0171	575-3-60	62,591
30MPW0172	380-3-60	62,843
30MPW0175	208/230-3-60	62,843
30MPW0176	460-3-60	62,624
30MPW0211	575-3-60	63,812
30MPW0212	380-3-60	64,305
30MPW0215	208/230-3-60	64,995
30MPW0216	460-3-60	63,982
30MPW0311	575-3-60	72,367
30MPW0312	380-3-60	73,867
30MPW0315	208/230-3-60	74,590
30MPW0316	460-3-60	72,471
30MPW0331	575-3-60	75,805
30MPW0332	380-3-60	77,305
30MPW0335	208/230-3-60	78,027
30MPW0336	460-3-60	75,909
30MPW0411	575-3-60	81,448
30MPW0412	380-3-60	83,162
30MPW0415	208/230-3-60	84,902
30MPW0416	460-3-60	82,220
30MPW0461	575-3-60	84,925
30MPW0462	380-3-60	85,181
30MPW0465	208/230-3-60	86,712
30MPW0466	460-3-60	84,531
30MPW0511	575-3-60	92,943
30MPW0512	380-3-60	91,295
30MPW0515	208/230-3-60	93,693
30MPW0516	460-3-60	90,628
30MPW0561	575-3-60	94,487
30MPW0562	380-3-60	92,538
30MPW0565	208/230-3-60	94,881
30MPW0566	460-3-60	91,815
30MPW0661	575-3-60	107,476
30MPW0662	380-3-60	104,322
30MPW0665	208/230-3-60	106,590
30MPW0666	460-3-60	102,757
30MPW0801	575-3-60	115,292
30MPW0802	380-3-60	112,303
30MPW0805	208/230-3-60	114,148
30MPW0806	460-3-60	111,186

*** MLPs shown are for standard design**

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

30MPA CONDENSERLESS LIQUID CHILLING PACKAGE
BASE UNIT WITH NO CRATING

ORDERING NUMBER	POWER SUPPLY	MASTER PRICE
30MPA0211	575-3-60	60,451
30MPA0212	380-3-60	60,944
30MPA0215	208/230-3-60	61,634
30MPA0216	460-3-60	60,621
30MPA0311	575-3-60	64,594
30MPA0312	380-3-60	66,089
30MPA0315	208/230-3-60	66,812
30MPA0316	460-3-60	64,693
30MPA0411	575-3-60	72,477
30MPA0412	380-3-60	74,190
30MPA0415	208/230-3-60	75,930
30MPA0416	460-3-60	73,249
30MPA0461	575-3-60	74,694
30MPA0462	380-3-60	77,097
30MPA0465	208/230-3-60	77,737
30MPA0466	460-3-60	75,679
30MPA0511	575-3-60	78,859
30MPA0512	380-3-60	77,212
30MPA0515	208/230-3-60	79,609
30MPA0516	460-3-60	76,544
30MPA0561	575-3-60	80,469
30MPA0562	380-3-60	78,520
30MPA0565	208/230-3-60	80,857
30MPA0566	460-3-60	77,792
30MPA0661	575-3-60	91,137
30MPA0662	380-3-60	87,984
30MPA0665	208/230-3-60	90,250
30MPA0666	460-3-60	86,419
30MPA0801	575-3-60	96,961
30MPA0802	380-3-60	93,972
30MPA0805	208/230-3-60	95,817
30MPA0806	460-3-60	92,855

*** MLPs shown are for standard design**

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

30MPQ WATER COOLED LIQUID HEAT PUMP PACKAGES
BASE UNIT WITH NO CRATING

ORDERING NUMBER	POWER SUPPLY	MASTER PRICE
30MPQ0211	575-3-60	70,193
30MPQ0212	380-3-60	70,736
30MPQ0215	208/230-3-60	71,495
30MPQ0216	460-3-60	70,380
30MPQ0311	575-3-60	79,604
30MPQ0312	380-3-60	81,254
30MPQ0315	208/230-3-60	82,049
30MPQ0316	460-3-60	79,718
30MPQ0411	575-3-60	89,593
30MPQ0412	380-3-60	91,478
30MPQ0415	208/230-3-60	93,392
30MPQ0416	460-3-60	90,442
30MPQ0461	575-3-60	93,418
30MPQ0462	380-3-60	93,699
30MPQ0465	208/230-3-60	95,383
30MPQ0466	460-3-60	92,984
30MPQ0511	575-3-60	102,237
30MPQ0512	380-3-60	100,425
30MPQ0515	208/230-3-60	103,062
30MPQ0516	460-3-60	99,691
30MPQ0561	575-3-60	103,936
30MPQ0562	380-3-60	101,792
30MPQ0565	208/230-3-60	104,369
30MPQ0566	460-3-60	100,997
30MPQ0661	575-3-60	118,224
30MPQ0662	380-3-60	114,754
30MPQ0665	208/230-3-60	117,249
30MPQ0666	460-3-60	113,033
30MPQ0801	575-3-60	126,821
30MPQ0802	380-3-60	123,533
30MPQ0805	208/230-3-60	125,563
30MPQ0806	460-3-60	122,305

*** MLPs shown are for standard design**

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

FACTORY-INSTALLED OPTIONS (FIOP)

POSITION 10

SOUND/MOUNTING

DESCRIPTION	MASTER PRICE		
	017-033	**041-046**	**051-080**
No options (Std) **2 11 12**	Std.	Std.	Std.
Height adjustment kit*‡ **2A**	30MP_SM_LEVEL_001 2,040	30MP_SM_LEVEL_002 2,040	30MP_SM_LEVEL_003 2,040
Mobility Kit (Wheels)* **11A**	30MP_SM_MOB_001 587	30MP_SM_MOB_002 587	30MP_SM_MOB_003 587
Compressor Sound Blanket **12C**	30MP_SM_SNDBKT_001 1,511	30MP_SM_SNDBKT_002 2,265	30MP_SM_SNDBKT_003 4,574
Insulated Compressor Sound Blanket †† **12D**	-	-	30MP_SM_SNDBKT_004 4,574
Sound Enclosure Panels (Without Water Manifold Piping) **12A**	30MP_SM_SNDBKT_005 14,923	30MP_SM_SNDBKT_006 14,923	30MP_SM_SNDBKT_007 14,923
Sound Enclosure Panels (With Water Manifold Piping) **12B**	30MP_SM_SNDBKT_008 13,643	30MP_SM_SNDBKT_009 13,643	30MP_SM_SNDBKT_010 13,643

* Height Adjustment Kit and Mobility Kit shipped loose.

** Compressor sound blankets are standard with the digital scroll compressor option.

When ordered with the digital compressor option, the sound enclosure will be supplied lieu of its standard sound blanket..

‡ Height adjustment kit is standard With the Water Manifold Piping.

†† Only available for sizes 051-080 due to space constraints and cannot be combined with any other insulation option.

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

POSITION 12

BRINE OPTION

DESCRIPTION	MASTER PRICE			
	017-031	033	041-046	051-080
Comfort Cooling Duty (32-60F, 0-15.55C LCFT) (Std) **1 6**	Std.	Std.	Std.	Std.
Water Manifold Piping (MPA) (Comfort Cooling Duty) *‡ **1A 1B**	8,108	-	8,825	11,092
Water Manifold Piping (MPW/Q) (Comfort Cooling Duty) *‡ **1A 1B 1C 1D 1G 1H**	15,930	16,864	16,669	21,146
Evaporator Isolation **1B 1D 1H**	6,403	4,373	4,373	4,373
Condenser Isolation** **1G 1H**	16,169	-	16,191	20,017
Head Pressure Control† **1C 1D 1E**	6,746	4,716	4,839	4,717
Medium temperature brine **6A 6C**	3,509	3,509	3,509	3,509

* If spacer connections are required to connect the piping for more than one (1) chiller module, please see the Manifold Victaulic Spacer Fitting Kit under Field Installed Accessories.
** Condenser Isolation only available on 30MPQ
† Head Pressure Control is only available With 30MPW.
‡ Height adjustment kit is standard With the Water Manifold Piping.

FACTORY-INSTALLED OPTIONS (FIOP)

POSITION 13

CAPACITY CONTROL

DESCRIPTION	VOLTAGE	MASTER PRICE						
		017-021	031	033	041-046	051-056	066	080
No Hot Gas Bypass (Std) **7 3**	All	Std.	Std.	Std.	Std.	Std.	Std.	Std.
With Hot Gas Bypass * **3A**	All	1,722	1,722	1,722	1,722	1,722	1,722	1,722
With Digital Compressor *† **3B**	All	2,627	5,101	3,373	4,291	-	-	-
High Interrupt § **7A**	208/230-3-60	1,944	3,157	3,233	5,180	4,843	4,843	4,843
	380-3-60	1,758	1,603	3,156	1,871	3,035	4,772	4,772
	460-3-60	1,758	1,622	1,622	1,955	3,027	3,027	3,027
	575-3-60	1,758	1,382	1,382	1,871	3,865	3,865	3,865

* Hot Gas Bypass & Digital Compressor not available With medium temperature brine option.

† Digital scroll available on 30MPW/A/Q sizes 017-046 and includes its own compressor sound blanket as standard.

§ High interrupt option requires Non-Fused Disconnect option.

POSITION 14

NON-FUSED DISCONNECT OPTION

DESCRIPTION	VOLTAGE	MASTER PRICE					
		017	021	031	033	041	046
Terminal Block (Std) 5 19	All	Std.	Std.	Std.	Std.	Std.	Std.
	All	-	Std.	Std.	-	Std.	Std.
Non-Fused Disconnect 5A	575-3-60 460-3-60	2,723	2,723	2,723	2,723	2,723	2,723
	380-3-60	2,723	2,723	2,723	2,723	2,723	3,181
	208/230-3-60	2,723	2,723	3,181	3,181	3,181	3,181
Fused Disconnect 5B	575-3-60 460-3-60	3,404	3,404	3,404	3,404	-	-
	380-3-60	3,404	3,404	3,404	3,404	-	-
	208/230-3-60	3,404	3,404	3,977	3,977	-	-
Phase Monitor 19A	All	903	903	903	903	903	903

DESCRIPTION	VOLTAGE	MASTER PRICE			
		051	056	066	080
Terminal Block (Std) 5 19	All	Std.	Std.	Std.	Std.
Non-Fused Disconnect 5A	575-3-60 460-3-60	5,176	5,266	5,266	5,624
	380-3-60	5,377	5,738	5,738	8,808
	208/230-3-60	11,811	12,604	12,604	17,983
Fused Disconnect 5B	575-3-60 460-3-60	-	-	-	-
	380-3-60	-	-	-	-
	208/230-3-60	-	-	-	-
Phase Monitor 19A	All	903	903	903	903

POSITION 15

CONTROL COMMUNICATIONS OPTION

DESCRIPTION	MASTER PRICE
PIC6 Touchscreen Controls (Std) 4 18	Std.
PIC6 Touchscreen Controls With Edge Remote Connectivity 18A	3,130
PIC6 Touchscreen Controls With EMM 4A	3,020

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

POSITION 16

PACKAGING OPTION

DESCRIPTION	MASTER PRICE			
	017-031	033	041-046	051-080
Bag (Standard) 15	Std.	Std.	Std.	Std.
Standard Factory Charge*	Std.	Std.	Std.	Std.
Nitrogen Charge MPW MPQ 8C 8D	629	657	909	1549
Export Crate (30MPW/MPQ)** 8D	3,306	3278	3026	2386
Export Crate (30MPA) 8B	3,935	3,935	3,935	3,935
Compressor Insulation † 15A	4,357	4,357	6,542	5,086

* Standard Factory Charge for 30MPW/30MPQ will be Refrigerant and for 30MPA will be Nitrogen.

** Export Crate option will require Nitrogen Charge for 30MPW/MPQ

† Option not available for sizes 051-080 when Position 10 has the one (1) of the following options: L, M, N, P, Q, R, S, or T.

FIELD-INSTALLED ACCESSORIES

CONTROL/COMMUNICATION ACCESSORIES

ORDERING NUMBER	DESCRIPTION	MASTER PRICE	RCD LIST
30MP70000201	Energy Management Module (Sizes 017-031, 041-080) -- Provides temperature reset, demand limit and temperature set point capability from external 4-20mA signal.	3,125	
30MP70000401	Energy Management Module (Sizes 033) -- Provides temperature reset, demand limit and temperature set point capability from external 4-20mA signal.	3,125	
33CNTRANLON-01-R	Carrier Translator for LonWorks (1 required for each CCN Controller / PIC)	¤	*
30GB660002	Thermistor (5k Ohm) Kit - 3-inch Water Temperature Sensor †		*
10HB50106801	Thermistor Well - 3 inch		*
HH79NZ029	Thermistor (5k Ohm) - 4-inch Water Temperature Sensor		*
10HB50106802	Thermistor Well - 4 inch		*
30MP-900---004	Condenser flow switch[μ]	844	

* RCD List Price - Subject to change on a quarterly basis and should be verified With RCD prior to quoting.
† Kit includes thermistor, union and two (2) connectors.
¤ See System and Controls price page (catalog 500-059) or check SAP for current pricing.
[μ] Condenser flow switch is included as standard with 30MPQ heat pump.

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

SOUND/MOUNTING ACCESSORIES

ORDERING NUMBER	DESCRIPTION	USAGE	MASTER PRICE
30MP-900---003	Vibration Isolation Package -- Resilient Pads	30MPW/A 017-080	318
30HW-900---002	Vibration Isolators (springs)	30MPW/A 017-046	1,044
30MP-900---020	Vibration Isolators (springs)	30MPW/A 051-080	1,181
30MP-900---021	Mobility Wheel Kit (Wheels)	30MPW/A 017-080	688
30MP-900---002	Height Adjustment Kit	30MPW/A 017-080	2,045
30MP-900---015	Manifold Victaulic Spacer Fitting Kit (MPA)	30MPW/A 017-080	1,869
30MP-900---016	Manifold Victaulic Spacer Fitting Kit (MPW)	30MPW/A 017-080	3,458

STRAINERS

ORDERING NUMBER	DESCRIPTION	USAGE	MASTER PRICE
30MP-900---005	Bronze Y Strainer (40 mesh, 1.5" NPT)	30MPW/A 017-080	1,254
30MP-900---006	Bronze Y Strainer (40 mesh, 2" NPT)	30MPW/A 017-046	1,491
30MP-900---007	Bronze Y Strainer (40 mesh, 2.5" NPT)	30MPW/A 017-046	1,768
30MP-900---008	Bronze Y Strainer (40 mesh, 3" NPT)	30MPW/A 017-080	2,255
30MP-900---009	Iron Y Strainer (40 mesh, 4" Flanged)	30MPW/A 017-080	3,247
30MP-900---010	Iron Y Strainer (40 mesh, 6" Flanged)	30MPW/A 017-080	6,230

MULTI-UNIT CONTROLLER

ORDERING NUMBER	DESCRIPTION	USAGE	MASTER PRICE
30MP70001401	Multi-Unit Controller †	30MPW/A 017-080 Up to Eight (8) Modules	11,446

† Also known as Multi-Chiller Controller

OPTIONAL EXTENDED WARRANTIES ARE AVAILABLE. SEE CATALOG NO. 500-089 "COMMERCIAL START-UP AND OPTIONAL EXTENDED WARRANTY PRICING"

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

MODEL NUMBER NOMENCLATURE

Position	1-4	5	6	7	8-11	12	13	14	15	16
Description	**30MP**	**E**	**W**	**6**	**7300**	**-**	**0**	**0**	**L**	**W**

Water-Cooled AquaSnap Chiller Electrical Distribution Panel

E Electrical Distribution Panel

Condenser Option

W = Water-Cooled/Heat Pump Condenser
A = Air-Cooled Condenser

Voltage Options

1 = 575-3-60
2 = 380-3-60
5 = 208/230-3-60
6 = 460-3-60

Breaker Amp Rating for Each Electrical Position

Unit Design Revision

High Interrupt Option

Piping/Mobility/Sound/Packaging Options

Unit Position Options

Wire Option

30MPE ELECTRICAL DISTRIBUTION PANEL
BASE UNIT WITH NO CRATING

ORDERING NUMBER	POWER SUPPLY	MASTER PRICE
30MPEW1	575-3-60	34,428
30MPEW2	380-3-60	34,428
30MPEW5	208/230-3-60	34,428
30MPEW6	460-3-60	34,428
30MPEW9	380/415-3-50	34,428
30MPEA1	575-3-60	24,374
30MPEA2	380-3-60	24,374
30MPEA5	208/230-3-60	24,374
30MPEA6	460-3-60	24,374
30MPEA9	380/415-3-50	24,374

Carrier Corporation • Syracuse, N.Y. 13221
SUBJECT TO CHANGE WITHOUT NOTICE

F.O.B. SHIPPING POINT
FREIGHT PREPAID

FACTORY-INSTALLED OPTIONS (FIOP)

POSITIONS 8-11

BREAKER AMP RATING FOR EACH ELECTRICAL POSITION

ORDERING NUMBER	BREAKER SIZE*	MASTER PRICE
0	None	0
3	25	1,574
4	30	1,574
5	35	1,720
6	40	1,720
7	45	1,720
8	50	2,606
9	60	2,606
B	70	2,815
C	80	2,815
D	90	2,860
F	100	2,860
G	110	3,928
H	125	3,928
J	150	4,395
K	175	4,575
L	200	4,575
M	225	4,575
N	250	5,458
P	300	6,172
Q	350	6,341
R	400	6,341

***** The largest breaker requirement Will be in position 8 and will go from largest to smallest in positions 9-11.

Breaker positions in the electrical distribution panel Will be assigned in the model as detailed below.

Model Number Position Number	Electrical Distribution Panel Position Number*
8	1
9	2
10	3
11	4

* Electrical distribution panel position number is referenced in Figure 1 below.
ł The total amperage (sum of Breaker Size) cannot exceed 760A. If an amperage above 760A is required, it can be evaluated through an ETO (and the size of the 30MPE panel may change).

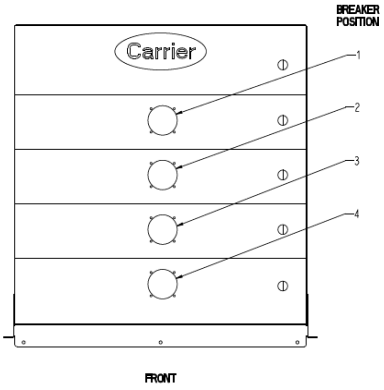


Figure 1

POSITION 13

HIGH INTERRUPT OPTION*

ORDERING NUMBER	INTERRUPT OPTON	MASTER PRICE
0	Standard Interrupt	0
1ǂ	High Interrupt	2,628

***** If the chillers are selected With high interrupt, then the electrical distribution panel must be selected With high interrupt, and vice versa.
ǂ If the total amperage of the electrical distribution panel exceeds 600A, there is no available option for High Interrupt.

POSITION 14

PIPING/MOBILITY/PACKAGING/SOUND OPTIONS

ORDERING NUMBER	OPTIONS	MASTER PRICE
0	Water Manifold Piping, Height Adjustment Kit & Bag	Std.
1	Water Manifold Piping, Height Adjustment Kit, Mobility Kit (Wheels) & Bag	587
2	Water Manifold Piping, Height Adjustment Kit & Export Crate	4,726
3	Water Manifold Piping, Height Adjustment Kit, Mobility Kit (Wheels) & Export Crate	5313
4	Water Manifold Piping, Height Adjustment Kit, Sound Enclosure Panels & Bag	5272
5	Water Manifold Piping, Height Adjustment Kit, Sound Enclosure Panels, Mobility Kit (Wheels) & Bag	5859
6	Water Manifold Piping, Height Adjustment Kit, Sound Enclosure Panels & Export Crate	9998
7	Water Manifold Piping, Height Adjustment Kit, Sound Enclosure Panels, Mobility Kit (Wheels) & Export Crate	10585

POSITION 15

UNIT POSITION OPTIONS

ORDERING NUMBER	PANEL LOCATION	MASTER PRICE
L	Electrical Load Side on Left	0
R	Electrical Load Side on Right	0

POSITION 16

WIRE OPTION

ORDERING NUMBER	WIRE OPTION	MASTER PRICE
W	Wire	0

30MPE FIELD-INSTALLED ACCESSORIES

SOUND/MOUNTING ACCESSORIES

ORDERING NUMBER	DESCRIPTION	USAGE	MASTER PRICE
30MP-900---003	Vibration Isolation Package -- Resilient Pads	30MPE	318
30HW-900---002	Vibration Isolators (springs)	30MPE	1,044
30MP-900---021	Mobility Wheel Kit (Wheels)	30MPE	688
30MP-900---015	Manifold Victaulic Spacer Fitting Kit (MPA)	30MPE	1,869
30MP-900---016	Manifold Victaulic Spacer Fitting Kit (MPW)	30MPE	3,458