39MA / 95MA "AIR-MOVEMENT" SECTIONS (TABLE OF CONTENTS)

DESCRIPTION	SHEET
39MA / 95MA AIR-MOVEMENT SECTIONS	
AIR-MOVEMENT FAMILY (ORG. CHART)	2
PART NO. CONFIGURATION	3-4
AIR-MOVEMENT SECTION ICONS	5-6
AIR-MOVEMENT SECTION RULES	7
AIR-MOVEMENT SECTION AIR-WAY LENGTHS	8-10
"AIR-MOVEMENT" COMPONENT (FAN SLED)	
39MB AIR-MOVEMENT COMPONENT PART NO. CONFIGURATION	11-12
39M FAN - F1/F2 MOTOR REQUIREMENT SELECTIONS	13
39M FAN MAXIMUM OPERATING SPEEDS	14-16
"MOTOR"	
93MR MOTOR PART NO. CONFIGURATION	17
93MS MOTOR PART NO. CONFIGURATION	18

DESCRIPTION	SHEET
"DRIVE PACKAGE"	
93MK/93MV DRIVE PACKAGE PART NO. CONFIGURATION	19
"SAFETY SCREEN"	
95GG "FLOOR SCREEN" PART NO. CONFIGURATION	20
ISOLATOR "RAIL / COVER"	
95GX ISOLATOR "RAIL/COVER" PART NO. CONFIGURATION	21
"COVER / SPACER"	
95VB "COVER / SPACER" PART NO. CONFIGURATION	22
"CHANNEL,PANEL"	
95VF "CHANNEL,PANEL" PART NO. CONFIGURATION	23
"BRACKET,ZEE"	
95VG "BRACKET,ZEE" PART NO. CONFIGURATION	24

DESCRIPTION	SHEET
"BRACKET,ZEE"	
95VH "BRACKET,ZEE" PART NO. CONFIGURATION	25
"ANGLE,DUCT"	
95VJ "ANGLE,DUCT" PART NO. CONFIGURATION	26
"PANEL,FAN"	
95VK "PANEL,FAN" PART NO. CONFIGURATION	27
"ANGLE,DUCT"	
95VL "ANGLE,DUCT" PART NO. CONFIGURATION	28
"ANGLE,DUCT"	
95VM "ANGLE,DUCT" PART NO. CONFIGURATION	29
"FAN WHEEL"	
95XB "FAN WHEEL" PART NO. CONFIGURATION	30
"DIRECT DRIVE PLENUM FAN"	
39MB POS. 6 = (9) "DDPF" PART NO. CONFIGURATION	31

********** END OF REV. AA.12 **********

REV	SHT	REVISION RECORD	DATE	BY	CHK	APP	ECN NO.
	31	ADDED NEW SHEET FOR 39MB WHEN POS. 6 = "9" (DDPF) PART NO. CONFIGURATION.					
	28-30	NO CHANGES TO THESE SHEETS.					
	27	ADDED "95VK" PART NO. CODING REQUIREMENTS FOR POSITIONS 8-17.					
	21-26	NO CHANGES TO THESE SHEETS.					
	20	REPLACED THE WORD "SAFETY" WITH "FLOOR".					
	19	NO CHANGES TO THIS SHEET.					
	18	ADDED CODES "A" AND "D" TO POS. 9. CHANGED POS. 13 TO INCLUDE SHAFT GROUNDING RING. REVISED CODE "0" DESCRIPTION AND ADDED CODE "1" TO SAME. MOVED CODE "X" OF POS. 16 TO BE LAST. ADDED 1200 RPM MOTOR FRAME DATA TO TABLE. MISC. UPDATES ADDED VOLTAGE DETAILS FOR SIZE 30 AND ADDED SYMBOL "*" TO UNIT SIZE 25 IN POSITIONS 7&8. UPDATED AND ADDED NOTES 7 AND 8.					
	17	ARRANGED POS. 16 TO SHOW CODE "X" LAST. REMOVED NOTES 3-5 AND NOTE No.6 BECOMES NOTE No.3.					
	16	ADDED "BELT DRIVE" TO PLENUM FAN MIN/MAX TABLE. ADDED MIN/MAX TABLE DATA FOR DIRECT DRIVE PLENUM FANS.					
	15	CORRECTED SUPPLY FAN "A" WHEEL/FAN SLED CODE, SZ 61 A27-27H DID STATE A27-22H IN ERROR.					
	14	NO CHANGES TO THIS SHEET.					
	13	ADDED RULES FOR FRONT MOUNTED MOTORS.					
	12	ADDED NOTE TO GO TO SHEET 31, IF POS. 6 = "9". REMOVED POSITION 15 FROM THIS SHEET, NOW COMBINED WITH POSITION 14 SHEET 11.					
AA	11	ADDED POS. 6 CODE "9" AND ADDED COLUMN "DP" TO SAME. ADDED NOTE TO GO TO SHEET 31 WHEN POS. 6 = 9 FOR PART NO. CONFIG. NOTED REF. DRAWING 39MA400251100 FOR BELT DRIVE PLENUM FANS. ADDED 39MA401391100 FOR DIRECT DRIVE PLENUM FANS. UPDATED NOTE ON "POSITIONS 10-18" FOR SHEET NO. DESIGNATED POS. 14-15 TO BE MOTOR SELECTION AND BELTS WITH REF. TO 39MA40000006_MS.XLSX. AND REMOVAL OF MOTOR RPM/TYPE.	09.14.12	ETR	ETR	PH	1044731
	10	ADDED NOTE FOR AWL CALULATION ON DIRECT DRIVE PLENUM FANS TO REFERENCE TWIKI RULE: DIRECT DRIVE PLENUM FAN (DDPF) RULES.					
	8-9	NO CHANGES TO THESE SHEETS.					
	7	NOTED RULES SPECIFIC TO BELT DRIVE PLENUM FANS AND ADDED DIRECT DRIVE WHERE APPROPRIATE. NOTED OPTIONS NOT AVAILABLE ON DIRECT DRIVE PLENUM FANS.					
	6	NO CHANGES TO THIS SHEET.					
	5	ADDED ACROYMS FOR DIRECT DRIVE FANS, (DT) RETURN FANS, "BPFR & BDPR" WAS "BPFR". (DT) SUPPLY FAN, "HPFR & DDPR" WAS "HPFR". (DT) EXHAUST FAN, "EPFR & EDPR" WAS "EPFR". (BT) SUPPLY FAN, "BPFR & BDPR" WAS z"BPFR".					
	4	NO CHANGES TO THIS SHEET.					
	3	ADDED CODE "3" TO POSITION 11 AND FAN TYPE "DP". ADDED TO POS. 13 CODE "C" (DDPR), CODE "H" (RDPR), CODE "L" (BDPR) AND CODE "N" (EDPR). ADDED CODES "L" AND "M" TO POS. 14. REMOVED CODE "X" FROM POS. 17.					
	2	ADDED DIRECT DRIVE ACROYMS, "RDPR", "DDPR", "EDPR" AND "BDPR" TO THEIR APPROPRIATE SECTION FAMILIES.					
	1	ADDED NEW SHEET 31 FOR "39MB POS. 7 = (9)" , "DDPF" PART NO. CONFIGURATION FOR DIRECT-DRIVE FAN SLED. UPDATED TABLE OF CONTENTS. THIS SHEET 1 OF 31 WAS 1 OF 30.					

DRAWING NUMBER: 39MA40000006 --- RELEASE LEVEL: Under Review

DRAWING RELEASE LEVEL: **Under Review**

THIRD ANGLE PROJECTION

MATERIAL
-
-
-

ENGINEERING REQUIREMENTS
Y-002

WEIGHT: -

SURFACE FINISH: -
MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING	MANUFACTURING
PH 09.14.12	- -

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 1 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

39MA /95MA (AIR-MOVEMENT) SECTION FAMILY

39MA
(INDOOR UNIT)
AIR-MOVEMENT SECTIONS
SEE SHEETS 3-31

(DT) RETURN FAN SECTIONS
RFSR
RFST
RFSB
BPFR
RDPR

(DT) STACKED RETURN FAN SECTIONS
SRFR
SRFT

(DT) SUPPLY FAN SECTIONS
HFSR
HFSW
VFSB
VFSW
HPFR
DDPR

(DT) EXHAUST FAN SECTIONS
EFSR
EPFR
EDPR

(BT) SUPPLY FAN SECTIONS
BFSR
BFSW
BFST
BPFR
BDPR

(ERV) EXHAUST FAN SECTIONS
XASN
XFSN
* XASW
* XFSW

(BT) EXHAUST FAN SECTIONS
EBFR
EBPR

95MA
(OUTDOOR UNIT)
AIR-MOVEMENT SECTIONS
SEE SHEETS 3-31

(DT) RETURN FAN SECTIONS
RFSR
RFSB
BPFR
BDPR

(DT) SUPPLY FAN SECTIONS
HFSR
HPFR
DDPR

(DT) EXHAUST FAN SECTIONS
EFSR
EPFR
EDPR

(BT) SUPPLY FAN SECTIONS
BFSR
BPFR
BDPR

(*) NON-RELEASED DATA

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

MATERIAL
-
-
-

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

ENGINEERING REQUIREMENTS
Y-002

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 2 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

39MA / 95MA (AIR MOVEMENT SECTIONS) P/N CONFIGURATION

(*) NON-RELEASED DATA

(+) OBSOLETE DATA

ALPHA/NUMERIC	N	N	A	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A	A	A	A	A/N	A/N	A/N	A/N
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
39M (INDOOR) COMPONENT DESCRIPTION (SAMPLE)	3	9	M	A	S	T	D	0	5	B	J	C	C	B	X	X	1	X
95M (OUTDDOR) COMPONENT DESCRIPTION (SAMPLE)	9	5	M	A	S	T	D	0	5	B	J	C	C	B	X	X	1	X

POSITION 1-4 - MODEL

CODE	TYPE & HAND
39MA	AMS (INDOOR) = RIGHTHAND
39MI	AMS (INDOOR) = LEFTHAND
95MA	AMS (OUTDOOR) = RIGHTHAND
95MI	AMS (OUTDOOR) = LEFTHAND

AMS = AIR MOVEMENT SECTION

POSITIONS 5-6 - ROUTING

REFERENCE POSITION 5 TABLE ON SHEET4 FOR "ROUTING" SELECTION CODES.

POSITION 7 - "SLP" FINISH & THERMAL BREAK OPTION

REFERENCE POSITION 7 TABLE ON SHEET4 FOR "SECT. LEVEL MATERIAL FINISH AND THERMAL BREAK" SELECTION CODES.

POSITION 8 - "ULP" OPTION

REFERENCE POSITION 8 TABLE ON SHEET4 FOR "UNIT LEVEL OPTION" SELECTION CODES.

POSITION 9 - "ULP" REVISION LEVEL

REFERENCE POSITION 9 TABLE ON SHEET4 FOR "UNIT LEVEL REVISION" SELECTION CODES.

POSITION 10 - SIZE

CODE	SIZE
B	03
C	06
D	08
F	10
G	12
H	14
J	17
K	21
L	25
M	30
N	36
P	40
Q	50
R	61
S	72
T	85
V	96
W	110

POSITION 11 - FAN TYPE

CODE	AF	FC	PF	DP
B	Y-C	N	N	N
C	N	Y-C	N	N
D	N	N	Y-C	N
K	N	Y-L	N	N
1	Y-LM	N	N	N
2	N	N	Y-LM	N
3	N	N	N	Y-L

C = COMEFRI FAN
L = LAU FAN
LM = LAU BUILT MECHANOVENT DESIGN FAN

POSITION 12 - DISCHARGE

CODE	WHEEL SIZE "A"	WHEEL SIZE "B"	WHEEL SIZE "C"
B	THF		
C		THF	
D	THR		
F		THR	
G	UBF		
H		UBF	
J	UBR		
K		UBR	
L	DBF		
M		DBF	
N	DBR		
P		DBR	
Q	BHF		
R		BHF	
S	BHR		
T		BHR	
V	NONE		
W		NONE	
Y			NONE

(SEE NOTE #1)

POSITION 13 - AIRFLOW

CODE	AIRFLOW
B	HORIZONTAL W/ EBR OPENING (DRAW-THRU HORIZONTAL) - HFSW
C	HORIZ. W/O EBR OPENING (DRAW-THRU HORIZ.) -HFSR,HPFR,DDPR
D	VERT. W/ EBR OPNG. (DRAW-THRU VERT. W/ BASE RAIL) -VFSW
F	VERT. W/O EBR OPNG. (DRAW-THRU VERT. W/ BASE RAIL) - VFSB
G	RETURN FAN (TOP) INLET - RFST
H	RETURN FAN (REAR) INLET - INTERMEDIATE- RFSR, BPFR, RDPR
J	RETURN FAN (BOTTOM) INLET - RFSB
K	B-T W/O EBR (TOP INLET) - BFST
L	B-T W/O EBR (REAR INLET) - BFSR, BPFR, BDPR
M	B-T W/ EBR (REAR INLET) - BFSW
N	POWER EXHAUST (DRAW-THRU) - EFSR, EPFR, EDPR
P	(ERV) EXHAUST
*R	(ERV) EXHAUST W/ EBR
+V	VERT. W/ EBR OPNG. (DRAW-THRU VERT. W/O BASE RAIL) -VFNW
+W	VERT. W/O EBR OPNG. (DRAW-THRU VERT. W/O BASE RAIL) -VFNB
2	STACKED RETURN FAN (REAR INLET) - SRFR, SRPR
3	STACKED RETURN FAN (TOP INLET) - SRFT

EBR = EXTERNAL BY-PASS RETURN
B-T = BLOW-THRU

POSITION 14 - MOTOR LOC./LINER/LUBE LINES

CODE	MOTOR LOCATION	PERF. LINER	LUBE LINES
B	REAR	N	N
C	REAR	Y	N
D	REAR	N	Y
F	REAR	Y	Y
G	SIDE	N	N
H	SIDE	Y	N
J	SIDE	N	Y
K	SIDE	Y	Y
L	FRONT	N	N
M	FRONT	Y	N

POSITION 15 OPTIONS

REFERENCE POSITION 15 CHART ON SHEET 4 FOR OPTION SELECTION CODES.

POSITION 16

CODE	
X	ALWAYS

POSITION 17 - ACCESS

CODE	DOORS
1	1 DOOR
2	2 OR MORE DOORS

POSITION 18

CODE	
X	ALWAYS

NOTES:

1. NONE "EQUALS" CLOSED OUTLET FOR DRAW-THRU PLENUM FAN. FULL OPEN DISCHARGE FOR BLOW-THRU AND RETURN PLENUM FANS. PARTIAL TOP FRONT OPENING FOR BPVO.

DRAWING RELEASE LEVEL: Under Review		Carrier, A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731	TITLE: PART NO. DEFINN 39MA P/N DEFINITION	
ENGINEERING REQUIREMENTS: Y-002	ENGINEERING: PH 09.14.12 / MANUFACTURING: -	SIZE: D	DRAWING NUMBER: 39MA40000006 SHEET 3 OF 31 / REV: AA
WEIGHT: -	DRAFTER: ETR 09.14.12 / CHECKER: ETR 09.14.12		
SURFACE FINISH: - / MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER / SCALE: N/A / DISTRIBUTION: CMX	

POSITIONS 5-6 - ROUTING	
CODE	ROUTING
ST	ALWAYS FOR STANDARD UNITS
XX	POSITIONS (1 & 2) OF SPECIAL ORDER NO. (REF. NOTE 1 THIS SHEET)

POSITION 7 - (SLP) FINISH AND THERMAL OPTIONS				
CODE	EXTERIOR FINISH (a)	PANEL INTERNAL SURFACE	COMPONENT(S) FINISH (b)	THERMAL BREAK
D	PRE-PAINT	AGION	PRE-PAINT	YES
F	PRE-PAINT	AGION	PRE-PAINT	NO
*G	PRE-PAINT	AGION	GALVANIZED	YES
*H	PRE-PAINT	AGION	GALVANIZED	NO
*J	PRE-PAINT	GALVANIZED	PRE-PAINT	YES
*K	PRE-PAINT	GALVANIZED	PRE-PAINT	NO
L	PRE-PAINT	GALVANIZED	GALVANIZED	YES
M	PRE-PAINT	GALVANIZED	GALVANIZED	NO
N	GALVANIZED	AGION	PRE-PAINT	YES
P	GALVANIZED	AGION	PRE-PAINT	NO
*Q	GALVANIZED	AGION	GALVANIZED	YES
*R	GALVANIZED	AGION	GALVANIZED	NO
*S	GALVANIZED	GALVANIZED	PRE-PAINT	YES
*T	GALVANIZED	GALVANIZED	PRE-PAINT	NO
V	GALVANIZED	GALVANIZED	GALVANIZED	YES
W	GALVANIZED	GALVANIZED	GALVANIZED	NO
*1	GALVANIZED	STAINLESS STEEL	STAINLESS STEEL	YES
2	GALVANIZED	STAINLESS STEEL	PRE-PAINT	YES
*3	GALVANIZED	STAINLESS STEEL	STAINLESS STEEL	NO
4	GALVANIZED	STAINLESS STEEL	PRE-PAINT	NO
*5	PRE-PAINT	STAINLESS STEEL	STAINLESS STEEL	YES
6	PRE-PAINT	STAINLESS STEEL	PRE-PAINT	YES
*7	PRE-PAINT	STAINLESS STEEL	STAINLESS STEEL	NO
8	PRE-PAINT	STAINLESS STEEL	PRE-PAINT	NO
X	POSITION (3) OF SPECIAL ORDER NO. (REF. NOTE 1 THIS SHEET)			

a) EXTERIOR FINISH INCLUDES - PANEL SURFACE, FRAMES, BASE RAILS, PANEL SUPPORTS, MW ROOF AND HOODS.
b) COMPONENT(S) FINISH INCLUDES - BAFFLES AND SEAL COVERS.

(*) NON-RELEASED DATA

POSITION 8 (ULP) OPTIONS	
CODE	OPTION
0	STANDARD UNIT (39M)
X	POSITION (4) OF SPECIAL ORDER NO. (REF. NOTE 1 THIS SHEET)

POSITION 9 (ULP) REVISION	
CODE	REVISION
0	STANDARD UNIT (39M)
1	(39MN) UNIT (EFFECTIVITY 06.2003) STANDARD UNIT WITH "SCREW RETAINERS"
2	(39MN) UNIT (EFFECTIVITY WK40 2004)
3	BUILD 00000027 (EFFECTIVE JAN. 20, 2006) AHUB 5.51 RELEASE (SCHED. B).
4	BUILD 00000045 (EFFECTIVE MAR. 09, 2007) AHUB 5.80 RELEASE (C-CAP).
5	AHUB 6.1 RELEASE (SYNERGY II)
X	POSITION (5) OF SPECIAL ORDER NO. (REF. NOTE 1 THIS SHEET)

POSITION 15 - OPTIONS			
CODE	MARINE LIGHT	CONVIENCE OUTLET	EXHAUST HOOD
C	N	N	Y
D	R	N	N
F	R	N	Y
G	L	N	N
H	L	N	Y
*J	B	N	N
*K	B	N	Y
L	R	Y	N
M	R	Y	Y
N	L	Y	N
P	L	Y	Y
*Q	B	R	N
*R	B	R	Y
*S	B	L	N
*T	B	L	Y
*V	B	B	N
*W	B	B	Y
X	N	N	N

NOTES:
1. WHEN "SLP" BECOMES A "QUOTE CONTROL", POSITIONS 5-9 BECOME THE ASSIGNED SPECIAL ORDER NO. EX. 19585.

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL
-
-
-

ENGINEERING REQUIREMENTS
Y-002

WEIGHT: -

SURFACE FINISH: -
MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING	MANUFACTURING
PH 09.14.12	- -

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company


THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.


TITLE
PART NO. DEFINN
39MA P/N DEFINITION


SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 4 OF 31	AA


NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX


(DT) RETURN FAN (ICONS)









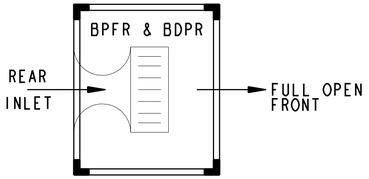









(DT) SUPPLY FAN (ICONS)

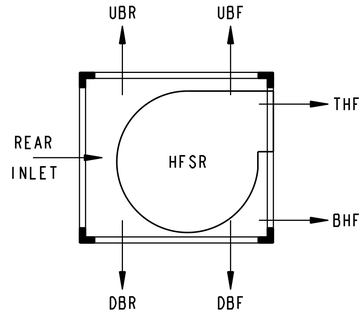





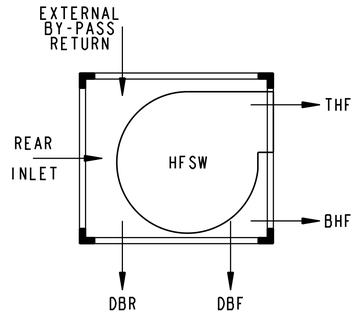

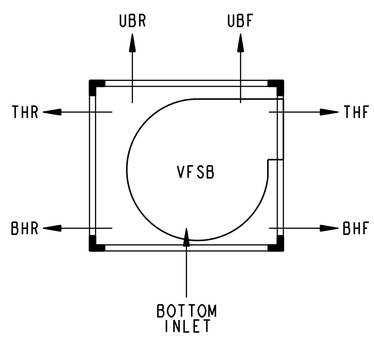

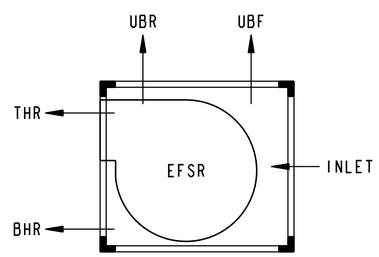


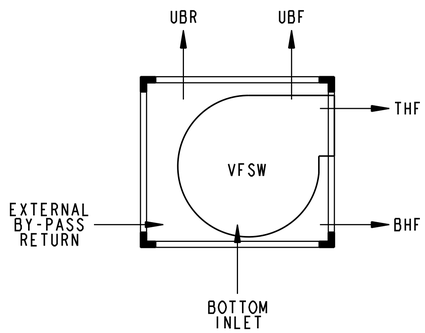






(DT) EXHAUST FAN (ICON)

(BT) SUPPLY FAN (ICONS)

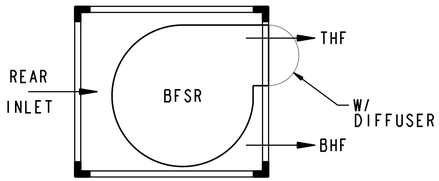

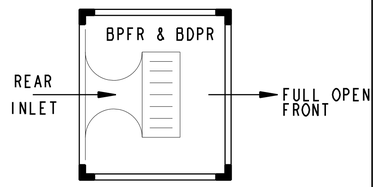


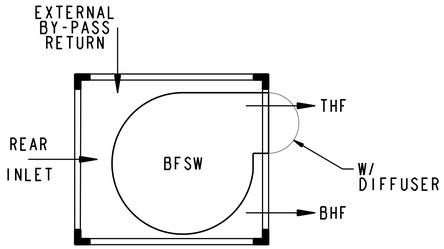


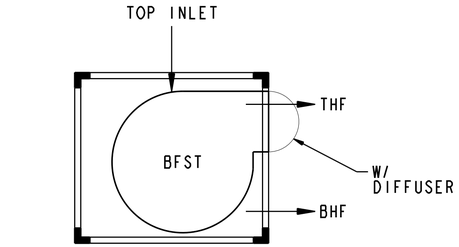

DRAWING RELEASE LEVEL: Under Review		Carrier — A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ± - 2 DEC ± - 3 DEC ± - ANG ± °	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731	TITLE: PART NO. DEFINN — 39MA P/N DEFINITION	
ENGINEERING REQUIREMENTS: Y-002	ENGINEERING: PH 09.14.12 / MANUFACTURING: -	SIZE: D	DRAWING NUMBER: 39MA40000006 SHEET 5 OF 31	REV: AA
WEIGHT: -	DRAFTER: ETR 09.14.12 / CHECKER: ETR 09.14.12		
SURFACE FINISH: - / MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER	SCALE: N/A	DISTRIBUTION: CMX

(ERV) EXHAUST FAN (ICONS)

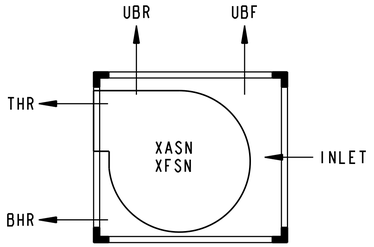

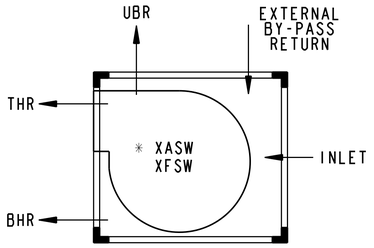

(*) NON-RELEASED DATA

DRAWING RELEASE LEVEL: Under Review			Carrier, A United Technologies Company
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ± - 2 DEC ± - 3 DEC ± - ANG ± - °		THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731		TITLE: PART NO. DEFINN 39MA P/N DEFINITION
ENGINEERING REQUIREMENTS: Y-002	ENGINEERING: PH 09.14.12	MANUFACTURING: - -	SIZE: D; DRAWING NUMBER: 39MA40000006 SHEET 6 OF 31; REV: AA
WEIGHT: -	DRAFTER: ETR 09.14.12	CHECKER: ETR 09.14.12	
SURFACE FINISH: -	MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER; SCALE: N/A; DISTRIBUTION: CMX

39MA "AIR-MOVEMENT SECTION" & 39MB "AIR-MOVEMENT COMPONENT" RULES

AHUB RULES:

39MA AIR-MOVEMENT SECTIONS:

BELT DRIVE PLENUM FANS AND DIRECT DRIVE PLENUM FANS HAVE NO DISCHARGE.

THR & BHR DISCHARGE ONLY
ALLOWED WITH VDT W/O EBR
OPENING.

DBF, DBR DISCHARGE AVAILABLE
W/ DRAW-THRU HORIZONTAL ONLY.

UBR AND UBF DISCHARGE ARE NOT
ALLOWED WITH HORIZONTAL AIRFLOW
FAN WITH (EBR) OPENING.

THR AND BHR DISCHARGE ARE NOT
ALLOWED WITH VERTICAL AIRFLOW
FAN WITH (EBR) OPENING.

RETURN FAN AVAILABLE W/ TOP HORIZONTAL
DISCHARGE ONLY.

BLOW-THRU FAN AVAILABLE W/
THF, BHF DISCHARGE ONLY.

SIZES 72-110 NOT AVAILABLE IN VERTICAL,
ERV OR STACKED ARRANGEMENTS.

LUBE LINE OPTION IS NOT AVAILABLE ON DIRECT
DRIVE PLENUM FAN SECTIONS..

THE FOLLOWING OPTIONS ARE NOT AVAILABLE ON DIRECT DRIVE PLENUM FANS.

VFD W/BYPASS
STARTER
DISCONNECT
EXTERNAL LUBE LINES

39MB AIR-MOVEMENT COMPONENTS:

FC WHEELS CANNOT BE CLASS III.

CLASS III WHEEL UPGRADE IS BY SPECIAL
ORDER ONLY.

FC FAN SLED WITH WHEEL SIZE 09-4A AND SIDE MOUNTED
MOTOR IS AVAILABLE W/CONSTANT PITCH DRIVE ONLY.

SIZE 36-50 AIRFOIL SUPPLY WHEEL "A" CANNOT
HAVE A DOWNBLAST DISCHARGE.

NO WHEEL SIZE "A" IN "ERV" FAN SECTIONS.

(TB) HF AND (DB) FR DISCHARGES ARE NO AVAILABLE
IN "ERV" FAN SECTION.

"ERV" SECTIONS ARE NOT ALLOWED WITH
BELT DRIVE PLENUM FANS AND DIRECT DRIVE
PLENUM FAN TYPES.

"ERV" SECTIONS ARE NOT AVAILABLE
W/ CONTROLS.

FAN SLED IN EXHAUST PLENUM FAN
SECTION MUST BE OPPOSITE HAND
OF SECTION.

WHEEL CAGE OPTION IS ONLY
AVAILABLE WITH BELT DRIVE PLENUM FAN
AND DIRECT DRIVE PLENUM FANS.

DRAWING RELEASE LEVEL: Under Review		Carrier, A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL - - -	AUTHORIZATION NUMBER ECN# 1044731	TITLE: PART NO. DEFINN — 39MA P/N DEFINITION	
ENGINEERING REQUIREMENTS Y-002	ENGINEERING PH 09.14.12 / MANUFACTURING - -	SIZE D	DRAWING NUMBER 39MA40000006 SHEET 7 OF 31 — REV AA
WEIGHT: -	DRAFTER ETR 09.14.12 / CHECKER ETR 09.14.12		
SURFACE FINISH - / MFG/PURCH -	CAD MODEL (INTERNAL USE ONLY) 39MA40000006 AA.7	NEXT DRAWING PER ORDER	SCALE N/A — DISTRIBUTION CMX

39MA AIR-MOVEMENT SECTIONS "NOMINAL" AIR-WAY LENGTHS (INCHES)

EXHAUST FANS

SECTION TYPE	DT / BT	H / V	FAN TYPE	WHEEL SIZE	INLET	EXT. BP RET.	DIFFUSER	DISCHARGE LOCATION	CABINET AIRWAY LENGTH															
									03	06	08	10	12	14	17	21	25	30	36	40	50	61	72	85	96	110
EFSR	DT	H	AF	B	REAR	N	N	(T/B)HR	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
EFSR	DT	H	AF	A	REAR	N	N	(T/B)HR	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	70"	76"	76"	81"
EFSR	DT	H	AF	B	REAR	N	N	UB(F/R)	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	77"	83"	83"	92"
EFSR	DT	H	AF	A	REAR	N	N	UB(F/R)	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	70"	77"	77"	83"
EFSR	DT	H	FC	B	REAR	N	N	(T/B)HR	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
EFSR	DT	H	FC	A	REAR	N	N	(T/B)HR	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	70"	76"	N/A	N/A
EFSR	DT	H	FC	B	REAR	N	N	UB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	77"	83"	83"	83"
EFSR	DT	H	FC	A	REAR	N	N	UB(F/R)	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	70"	77"	N/A	N/A
EPFR	DT	H	PF	B	REAR	N	N	N/A	48"	54"	42"	42"	48"	48"	48"	54"	54"	54"	66"	72"	72"	78"	70"	79"	89"	95"
EPFR	DT	H	PF	A	REAR	N	N	N/A	N/A	N/A	54"	N/A	N/A	N/A	48"	48"	54"	54"	54"	72"	72"	78"	67"	76"	79"	85"
XASN	DT	H	AF	B	REAR	N	N	ALL	42"	42"	42"	42"	42"	48"	48"	48"	66"	66"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
XASN	DT	H	AF	A	REAR	N	N	ALL	N/A	42"	42"	42"	42"	48"	48"	48"	66"	66"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* XASW	DT	H	AF	B	REAR	Y	N	ALL	24"	42"	42"	42"	42"	48"	48"	48"	66"	66"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* XASW	DT	H	AF	A	REAR	Y	N	ALL	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
XFSN	DT	H	FC	B	REAR	N	N	ALL	42"	42"	42"	42"	42"	48"	48"	48"	66"	66"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
XFSN	DT	H	FC	A	REAR	N	N	ALL	N/A	42"	42"	42"	42"	48"	48"	48"	66"	66"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* XFSW	DT	H	FC	B	REAR	Y	N	ALL	24"	42"	42"	42"	42"	48"	48"	48"	66"	66"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* XFSW	DT	H	FC	A	REAR	Y	N	ALL	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* EBFR	DT	H	AF	B	REAR	N	Y	(T/B)HR	42"	42"	36"	36"	42"	48"	48"	48´	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
* EBFR	DT	H	AF	A	REAR	N	Y	(T/B)HR	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	70"	76"	76"	81"
* EBFR	DT	H	FC	B	REAR	N	Y	(T/B)HR	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
* EBFR	DT	H	FC	A	REAR	N	Y	(T/B)HR	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	70"	76"	N/A	N/A
* EBPR	DT	H	PF	B	REAR	N	N	N/A	48"	54"	42"	42"	48"	48"	48"	54"	54"	54"	66"	72"	72"	78"	70"	79"	89"	95"
* EBFR	DT	H	PF	A	REAR	N	N	N/A	N/A	N/A	54"	N/A	N/A	N/A	48"	48"	54"	54"	54"	72"	72"	78"	67"	76"	79"	85"

SUPPLY FANS

SECTION TYPE	DT / BT	H / V	FAN TYPE	WHEEL SIZE	INLET	EXT. BP RET.	DIFFUSER	DISCHARGE LOCATION	CABINET AIRWAY LENGTH															
									03	06	08	10	12	14	17	21	25	30	36	40	50	61	72	85	96	110
BFSR	BT	H	AF	B	REAR	N	Y	(T/B)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
BFSR	BT	H	AF	A	REAR	N	Y	(T/B)HF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	72"	70"	76"	76"	81"
BFSR	BT	H	FC	B	REAR	N	Y	(T/B)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
BFSR	BT	H	FC	A	REAR	N	Y	(T/B)HF	N/A	N/A	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	76"	N/A	N/A
BFST	BT	H	AF	B	TOP	N	Y	(T/B)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
BFST	BT	H	AF	A	TOP	N	Y	(T/B)HF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	72"	70"	76"	76"	81"
BFST	BT	H	FC	B	TOP	N	Y	(T/B)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
BFST	BT	H	FC	A	TOP	N	Y	(T/B)HF	N/A	N/A	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	76"	N/A	N/A
*BFSW	BT	H	AF	B	REAR	Y	Y	(T/B)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"

KEY:

BT = BLOW-THRU
DT = DRAW-THRU
H = HORIZONTAL
V = VERTICAL
EXT. = EXTERNAL
BP = BY-PASS
RET. = RETURN

AF = AIR-FOIL
FC = FORWARD CURVE
PF = PLENUM

(*) NON-RELEASED DATA

DRAWING RELEASE LEVEL: Under Review		Carrier — A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731	TITLE: PART NO. DEFINN — 39MA P/N DEFINITION	
ENGINEERING REQUIREMENTS: Y-002	ENGINEERING: PH 09.14.12 / MANUFACTURING: -	SIZE: D	DRAWING NUMBER: 39MA40000006 SHEET 8 OF 31 — REV: AA
WEIGHT: -	DRAFTER: ETR 09.14.12 / CHECKER: ETR 09.14.12		
SURFACE FINISH: - / MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER / SCALE: N/A / DISTRIBUTION: CMX	

39MA AIR-MOVEMENT SECTIONS "NOMINAL" AIR-WAY LENGTHS (INCHES)

SUPPLY FANS (CONT'D. FROM SHEET 8)

SECTION TYPE	DT / BT	H / V	FAN TYPE	WHEEL SIZE	INLET	EXT. BP RET.	DIFFUSER	DISCHARGE LOCATION	CABINET AIRWAY LENGTH														
									03	06	08	10	12	14	17	21	25	30	36	40	50	61	72	85	96	110
* BFSW	BT	H	AF	A	REAR	Y	Y	(TB)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	70"	76"	76"	81"
* BFSW	BT	H	FC	B	REAR	Y	Y	(TB)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
* BFSW	BT	H	FC	A	REAR	Y	Y	(TB)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	76"	N/A	N/A
BPFR	BT	H	PF	B	REAR	N	N	N/A	48"	54"	42"	42"	48"	48"	48"	54"	54"	54"	66"	72"	72"	78"	70"	79"	89"	95"
BPFR	BT	H	PF	A	REAR	N	N	N/A	N/A	N/A	54"	N/A	N/A	N/A	48"	48"	54"	54"	54"	72"	72"	78"	67"	76"	79"	85"
HFSR	DT	H	AF	B	REAR	N	N	(TB)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
HFSR	DT	H	AF	A	REAR	N	N	(TB)HF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	72"	70"	76"	76"	81"
HFSR	DT	H	AF	B	REAR	N	N	UB(F/R)	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	77"	83"	83"	92"
HFSR	DT	H	AF	A	REAR	N	N	UB(F/R)	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	72"	70"	77"	77"	83"
HFSR	DT	H	AF	B	REAR	N	N	DB(F/R)	42"	42"	42"	36"	48"	54"	54"	54"	66"	66"	60"	66"	72"	78"	79"	86"	86"	92"
HFSR	DT	H	AF	A	REAR	N	N	DB(F/R)	N/A	42"	42"	42"	42"	42"	54"	54"	54"	N/A	N/A	N/A	N/A	72"	72"	79"	79"	86"
HFSR	DT	H	FC	B	REAR	N	N	(TB)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
HFSR	DT	H	FC	A	REAR	N	N	(TB)HF	N/A	N/A	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	76"	N/A	N/A
HFSR	DT	H	FC	B	REAR	N	N	UB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	77"	83"	83"	83"
HFSR	DT	H	FC	A	REAR	N	N	UB(F/R)	N/A	N/A	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	77"	N/A	N/A
HFSR	DT	H	FC	B	REAR	N	N	DB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	79"	86"	86"	86"
HFSR	DT	H	FC	A	REAR	N	N	DB(F/R)	N/A	N/A	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	72"	79"	N/A	N/A
* HFSW	DT	H	AF	B	REAR	Y	N	(TB)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
* HFSW	DT	H	AF	A	REAR	Y	N	(TB)HF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	70"	76"	76"	81"
* HFSW	DT	H	AF	B	REAR	Y	N	UB(F/R)	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	77"	83"	83"	92"
* HFSW	DT	H	AF	A	REAR	Y	N	UB(F/R)	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	70"	77"	77"	83"
* HFSW	DT	H	AF	B	REAR	Y	N	DB(F/R)	42"	42"	42"	42"	48"	54"	54"	54"	66"	66"	60"	66"	72"	78"	79"	86"	86"	92"
* HFSW	DT	H	AF	A	REAR	Y	N	DB(F/R)	42"	42"	42"	42"	48"	54"	54"	54"	66"	66"	60"	66"	72"	78"	72"	79"	79"	86"
* HFSW	DT	H	FC	B	REAR	Y	N	(TB)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
* HFSW	DT	H	FC	A	REAR	Y	N	(TB)HF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	76"	N/A	N/A
* HFSW	DT	H	FC	B	REAR	Y	N	UB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	77"	83"	83"	83"
* HFSW	DT	H	FC	A	REAR	Y	N	UB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	70"	77"	N/A	N/A
* HFSW	DT	H	FC	B	REAR	Y	N	DB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	79"	86"	86"	86"
* HFSW	DT	H	FC	A	REAR	Y	N	DB(F/R)	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	72"	79"	N/A	N/A
HPFR	DT	H	PF	B	REAR	N	N	N/A	48"	54"	42"	42"	48"	48"	48"	54"	54"	54"	66"	72"	72"	78"	70"	79"	89"	95"
HPFR	DT	H	PF	A	REAR	N	N	N/A	N/A	N/A	54"	N/A	N/A	N/A	48"	48"	54"	54"	54"	72"	72"	78"	67"	76"	79"	85"
* VFNB	DT	V	AF	A / B	BOTTOM	N	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* VFNB	DT	V	FC	A / B	BOTTOM	N	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
* VFNW	DT	V	AF	A / B	BOTTOM	N	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	N/A	N/A	N/A	N/A
* VFNW	DT	V	FC	A / B	BOTTOM	N	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	N/A	N/A	N/A	N/A
VFSB	DT	V	AF	A / B	BOTTOM	N	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	N/A	N/A	N/A	N/A
VFSB	DT	V	FC	A / B	BOTTOM	N	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	N/A	N/A	N/A	N/A
* VFSW	DT	V	AF	A / B	BOTTOM	Y	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	N/A	N/A	N/A	N/A
* VFSW	DT	V	FC	A / B	BOTTOM	Y	N	ALL	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	N/A	N/A	N/A	N/A

KEY:

BT = BLOW-THRU
DT = DRAW-THRU
H = HORIZONTAL
V = VERTICAL
L/S = LARGE/SMALL
EXT. = EXTERNAL
BP = BY-PASS
RET. = RETURN

AF = AIR-FOIL
FC = FORWARD CURVE
PF = PLENUM

(*) NON-RELEASED DATA

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

AUTHORIZATION NUMBER: ECN# 104473I

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 9 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

39MA AIR-MOVEMENT SECTIONS "NOMINAL" AIR-WAY LENGTHS (INCHES)

RETURN FANS																								
SECTION TYPE	DT / BT	H / V	FAN TYPE	WHEEL SIZE	INLET	EXT. BP RET.	DIFFUSER	DISCHARGE LOCATION	CABINET AIRWAY LENGTH															
									03	06	08	10	12	14	17	21	25	30	36	40	50	61	72	85	96	110
BPFR	DT	H	PF	B	REAR	N	N	N/A	48"	54"	42"	42"	48"	48"	48"	54"	54"	54"	66"	72"	72"	78"	70"	79"	89"	95"
BPFR	DT	H	PF	A	REAR	N	N	N/A	N/A	N/A	54"	N/A	N/A	N/A	48"	48"	54"	54"	54"	72"	72"	78"	67"	76"	79"	85"
RFSB	DT	H	AF	B	BOTTOM	N	N	THF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
RFSB	DT	H	AF	A	BOTTOM	N	N	THF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	70"	76"	76"	81"
RFSB	DT	H	FC	B	BOTTOM	N	N	THF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
RFSB	DT	H	FC	A	BOTTOM	N	N	THF	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	70"	76"	N/A	N/A
RFST	DT	H	AF	B	TOP	N	N	THF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
RFST	DT	H	AF	A	TOP	N	N	THF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	70"	76"	76"	81"
RFST	DT	H	FC	B	TOP	N	N	THF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
RFST	DT	H	FC	A	TOP	N	N	THF	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	70"	76"	N/A	N/A
RFSR	DT	H	AF	B	REAR	N	N	THF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	76"	81"	81"	78"
RFSR	DT	H	AF	A	REAR	N	N	THF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	70"	76"	76"	81"
RFSR	DT	H	FC	B	REAR	N	N	THF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	76"	81"	81"	81"
RFSR	DT	H	FC	A	REAR	N	N	THF	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	70"	76"	N/A	N/A
SRFR	DT	H	AF	B	REAR	N	N	THF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	N/A	N/A	N/A	N/A
SRFR	DT	H	AF	A	REAR	N	N	THF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	N/A	N/A	N/A	N/A
SRFR	DT	H	FC	B	REAR	N	N	THF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	N/A	N/A	N/A	N/A
SRFR	DT	H	FC	A	REAR	N	N	THF	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	N/A	N/A	N/A	N/A
* SRPR	DT	H	PF	B	REAR	N	N	N/A	48"	54"	42"	42"	48"	48"	48"	54"	54"	54"	66"	72"	72"	78"	N/A	N/A	N/A	N/A
* SRPR	DT	H	PF	A	REAR	N	N	N/A	N/A	N/A	54"	N/A	N/A	N/A	48"	48"	54"	54"	54"	72"	72"	78"	N/A	N/A	N/A	N/A
SRFT	DT	H	AF	B	TOP	N	N	THF	42"	42"	36"	36"	42"	48"	48"	48"	60"	60"	60"	66"	72"	78"	N/A	N/A	N/A	N/A
SRFT	DT	H	AF	A	TOP	N	N	THF	N/A	42"	42"	42"	36"	36"	48"	48"	48"	N/A	60"	66"	72"	78"	N/A	N/A	N/A	N/A
SRFT	DT	H	FC	B	TOP	N	N	THF	24"	30"	36"	36"	42"	48"	48"	48"	60"	60"	60"	60"	66"	66"	N/A	N/A	N/A	N/A
SRFT	DT	H	FC	A	TOP	N	N	THF	N/A	24"	36"	36"	36"	48"	48"	48"	48"	60"	60"	60"	60"	66"	N/A	N/A	N/A	N/A

NOTE:

AIRWAY LENGTHS FOR DIRECT DRIVE PLENUM FAN SECTIONS ARE CALCULATED PER ORDER. AWL IS DETERMINED BY APPLICATION, FAN SIZE, AND MOTOR SIZE. SEE TWIKI RULE: "DIRECT DRIVE PLENUM FAN (DDPF) RULES" FOR MORE DETAILED INFORMATION.

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL
-
-
-

ENGINEERING REQUIREMENTS
Y-002

WEIGHT: -

SURFACE FINISH: -

MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING	MANUFACTURING
PH 09.14.12	- -

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 10 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

39MB (AIR MOVEMENT COMPONENTS) P/N CONFIGURATION

(*) NON-RELEASED DATA

ALPHA/NUMERIC	N	N	A	A	A	A	A	A	A	N	N	N	N	A	A/N	A	A	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COMPONENT DESCRIPTION (SAMPLE)	3	9	M	B	B	G	G	B	B	1	1	0	0	C	A	B	B	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
39MB

POSITION 5 - SIZE	
CODE	SIZE
B	03
C	06
D	08
F	10
G	12
H	14
J	17
K	21
L	25
M	30
N	36
P	40
Q	50
R	61
S	72
T	85
V	96
W	110

POSITION 6 - FAN TYPE

CODE	AF	FC	PF	DP	SLED CODE	APPLICATION
B	Y-C	N	N	N	A	SUPPLY
C	Y-C	N	N	N	B	SUPPLY
D	N	Y-C	N	N	A	SUPPLY
F	N	Y-C	N	N	B	SUPPLY
G	N	Y-L	N	N	A	SUPPLY
H	N	Y-L	N	N	B	SUPPLY
J	N	N	Y-C	N	A	SUPPLY
K	N	N	Y-C	N	B	SUPPLY
L	Y-C	N	N	N	A	RETURN/EXHAUST
M	Y-C	N	N	N	B	RETURN/EXHAUST
N	N	Y-C	N	N	A	RETURN/EXHAUST
P	N	Y-C	N	N	B	RETURN/EXHAUST
Q	N	Y-L	N	N	A	RETURN/EXHAUST
R	N	Y-L	N	N	B	RETURN/EXHAUST
S	N	N	Y-C	N	A	RETURN/EXHAUST
T	N	N	Y-C	N	B	RETURN/EXHAUST
1	Y-LM	N	N	N	B	SUPPLY
2	Y-LM	N	N	N	B	RETURN/EXHAUST
3	N	N	Y-LM	N	B	SUPPLY
4	N	N	Y-LM	N	B	RETURN/EXHAUST
5	Y-LM	N	N	N	A	SUPPLY
6	Y-LM	N	N	N	A	RETURN/EXHAUST
7	N	N	Y-LM	N	A	SUPPLY
8	N	N	Y-LM	N	A	RETURN/EXHAUST
**9	N	N	N	Y-L	N/A	N/A

C = COMEFRI FAN (UNIT SIZES 72-110)
L = LAU INDUSTRIES FAN (UNIT SIZES 03-61)
LM = LAU BUILT MECHANOVENT DESIGN FAN (UNIT SIZES 03-61)

** NOTE: IF POS 6 = 9, THEN GO TO SHEET 31 FOR REMAINDER OF PART NUMBER CONFIGURATION.

POSITION 7 - DISCHARGE

CODE	DISCHARGE	SPECIAL ORDER
B	BHF	N
C	BHR	N
D	DBF	N
F	DBR	N
G	THF	N
H	THR	N
J	UBF	N
K	UBR	N
L	NONE (PF)	N
M	BHF	Y
N	BHR	Y
P	DBF	Y
Q	DBR	Y
R	THF	Y
S	THR	Y
T	UBF	Y
V	UBR	Y
W	NONE (PF)	Y

POSITIONS 14-15 - MOTOR SELECTION & EXTRA BELTS

SEE LATEST REVISION OF CONTROLLED SPREADSHEET 39MA40000006_MS.XLSX FOR CODES DETAILING REQUIREMENTS FOR MOTOR AND OPTION FOR EXTRA BELTS IN DRIVE PACKAGE.

POSITION 8 - OPTIONS

CODE	BELT GUARD	INLET SCREEN	INTERNAL ISOLATION	EXTENDED LUBE LINES
T	N	N	S	N
V	Y	N	S	N
Y	N	Y	S	N
Z	Y	Y	S	N
1	N	N	S	Y
2	Y	N	S	Y
3	N	Y	S	Y
4	Y	Y	S	Y

S = SPRING ISOLATION

POSITION 9 - ROTOR OPTIONS

	PERFORMANCE REQUIREMENTS		CUSTOMER UPGRADE REQUIREMENTS		MANUFACTURER SPECIFIED		
CODE	WHEEL CLASS	BEARING L50	WHEEL CLASS UPGRADE	BEARING L50 UPGRADE	WHEEL CLASS	BEARING L50	WHEEL WELD
B	1	200	NONE	NONE	1	200	FULL
C	1	200	2	NONE	2	200	FULL
* D	1	200	3	500	3	500	FULL
F	1	200	2	500	2	500	FULL
G	2	200	NONE	NONE	2	200	FULL
* H	2	200	3	500	3	500	FULL
J	2	200	NONE	500	2	500	FULL
* K	3	500	NONE	NONE	3	500	FULL
* L	1	200	NONE	NONE	1	200	STITCH
* M	1	200	2	NONE	2	200	STITCH
* N	1	200	2	500	2	500	STITCH
* P	2	200	NONE	NONE	2	200	STITCH
* Q	2	200	NONE	500	2	500	STITCH

POSITIONS 10-18

REFERENCE SHEET 12 FOR PART NO. POSITIONS 10-18 CODE SELECTIONS AND DESCRIPTIONS.

REFERENCE DRAWINGS:

39MA40024600 (AF FANS)
39MA40025100 (BELT DRIVE PLENUM FANS)
39MA40025400 (FC FANS)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON: 1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 11 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

(+) OBSOLETE DATA

POSITION 10-13
FAN SPEED (RPM)
NOTE: POSITION 10 = 0 IF (RPM) IS 3 DIGITS.

NOTE: IF POSITION 6 = 9, THEN GO TO SHEET 31 FOR REMAINDER OF PART NUMBER CONFIGURATION.

POSITION 16 - DRIVE TYPE/SERVICE FACTOR/INSTALLATION REQ.				
CODE	DRIVE TYPE/SERVICE FACTOR	FAC. SUPPLIED & FAC. INSTALLED	FIELD SUPPLIED & FIELD INSTALLED	MULTIPLE BELT DRIVE REQUIRED
B	CONSTANT PITCH (1.5)	Y	N	N
C	VARIABLE PITCH (1.5)	Y	N	N
D	CONSTANT PITCH (2.0)	Y	N	N
F	VARIABLE PITCH (2.0)	Y	N	N
G	CONSTANT PITCH (1.2)	Y	N	N
H	VARIABLE PITCH (1.2)	Y	N	N
J	CONSTANT PITCH (1.5)	Y	N	Y
K	VARIABLE PITCH (1.5)	Y	N	Y
L	CONSTANT PITCH (1.2)	Y	N	Y
M	VARIABLE PITCH (1.2)	Y	N	Y
X	NONE	N	Y	N

POSITION 17 - MOTOR LOCATION/INSTALLATION REQ.				
CODE	HAND	MOTOR LOCATION	FAC. SUPPLIED & FAC. INSTALLED	FIELD SUPPLIED & FIELD INSTALLED
B	R	SIDE	Y	N
C	R	REAR	Y	N
D	L	SIDE	Y	N
F	L	REAR	Y	N
G	R	SIDE	N	Y
H	R	REAR	N	Y
J	L	SIDE	N	Y
K	L	REAR	N	Y

NOTE:
03/06 AF = REAR MOTOR
08/10 AF A = REAR MOTOR
03/06 PF = REAR MOTOR
08 PF A = REAR MOTOR
(ALL OTHERS = SIDE MOTOR)

POSITION 18
AIR MOVEMENT COMPONENT REVISION LEVEL
(SEE NOTE #1)

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

MATERIAL
-
-
-

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

ENGINEERING REQUIREMENTS
Y-002

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 12 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

39M FAN MOTOR - RULES FOR "CONDUIT BOX" LOCATION

SIDE MOUNTED MOTORS:

AF/FC - BOX SHALL BE POSITIONED TOWARDS CENTER OF FAN SLED.

PF - BOX SHALL BE POSITIONED AWAY FROM FAN.

FRONT MOUNTED MOTORS:

DP - BOX SHALL BE POSITIONED TOWARDS THE HAND SPECIFIED.

REAR MOUNTED MOTORS:

AF/FC - BOX SHALL BE POSITIONED TOWARDS REAR OF FAN SLED.

PF - BOX SHALL BE POSITIONED TOWARDS HAND SIDE OF FAN.

NOTE: F3 MOUNTING CAN BE SUBSTITITED FOR ANY F1 OR F2 MOUNTING.

DRAWING RELEASE LEVEL: Under Review			Carrier, A United Technologies Company
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±°		THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.
MATERIAL - - -	AUTHORIZATION NUMBER ECN# 1044731		TITLE PART NO. DEFINN 39MA P/N DEFINITION
ENGINEERING REQUIREMENTS Y-002	ENGINEERING PH 09.14.12	MANUFACTURING - -	SIZE D / DRAWING NUMBER 39MA40000006 SHEET 13 OF 31 / REV AA
WEIGHT: -	DRAFTER ETR 09.14.12	CHECKER ETR 09.14.12	
SURFACE FINISH - / MFG/PURCH -	CAD MODEL (INTERNAL USE ONLY) 39MA40000006 AA.7		NEXT DRAWING PER ORDER / SCALE N/A / DISTRIBUTION CMX

39M FAN SELECTIONS W/ "MIN-MAX" MOTORS

WHEEL / FAN SLED CODE W(X-YZ) WHERE X, Y, Z ARE NULL INDICATES USAGE OF WHEEL / SLED IN ORIGINAL UNIT SIZE.

ORIGINAL WHEEL / SLED MAY BE APPLIED IN OTHER SIZES AS INDICATED BY WHEEL / FAN SLED CODE W(X-YZ) WHERE W = WHEEL SIZE; X = ORIGINAL UNIT SIZE; Y = SLED APPLICATION, "R" FOR RETURN, "S" FOR SUPPLY; Z = SLED CODE A OR B.

AIRFOIL												
UNIT SIZE	SUPPLY						RETURN / EXHAUST					
	A			B			A			B		
	WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME	
		MAX.	MIN.		MAX.	MIN.		MAX.	MIN.		MAX.	MIN.
LAU BUILT MECHANOVENT DESIGN												
03	N/A	N/A	N/A	101	5 / 184T	0.5 / 56	N/A	N/A	N/A	101	5 / 184T	0.5 / 56
06	101(03-SB)	5 / 184T	0.5 / 56	121	**7.5 / 184T	0.5 / 56	101(03-SB)	5 / 184T	0.5 / 56	121	**7.5 / 184T	0.5 / 56
08	121(06-SB)	**7.5 / 184T	0.5 / 56	131	10 / 215T	1 / 143T	121(06-SB)	**7.5 / 184T	0.5 / 56	131	10 / 215T	1 / 143T
10	121(06-SB)	**7.5 / 184T	0.5 / 56	131	15 / 254T	1.5 / 145T	121(06-SB)	**7.5 / 184T	0.5 / 56	131	15 / 254T	1.5 / 145T
12	131(10-SB)	15 / 254T	1.5 / 145T	161	15 / 254T	1.5 / 145T	131(10-SB)	15 / 254T	1.5 / 145T	161	15 / 254T	1.5 / 145T
14	131(10-SB)	15 / 254T	1.5 / 145T	161	20 / 256T	1.5 / 145T	131(10-SB)	15 / 254T	1.5 / 145T	161	20 / 256T	1.5 / 145T
17	161(14-SB)	20 / 256T	1.5 / 145T	181	20 / 256T	1.5 / 145T	161(14-SB)	20 / 256T	1.5 / 145T	181	20 / 256T	1.5 / 145T
21	181(17-SB)	20 / 256T	1.5 / 145T	201	25 / 284T	2 / 145T	181(17-SB)	20 / 256T	1.5 / 145T	201	25 / 284T	2 / 145T
25	201(21-SB)	25 / 284T	2 / 145T	221	30 / 286T	2 / 145T	201(21-SB)	25 / 284T	2 / 145T	221	30 / 286T	2 / 145T
30	N/A	N/A	N/A	221	40 / 324T	3 / 182T	N/A	N/A	N/A	221	40 / 324T	3 / 182T
36	271	15 / 254T	3 / 182T	241	40 / 324T	5 / 184T	241	40 / 324T	5 / 184T	271	15 / 254T	3 / 182T
40	301	15 / 254T	3 / 182T	271	50 / 326T	5 / 184T	271	50 / 326T	5 / 184T	301	15 / 254T	3 / 182T
50	331	20 / 256T	5 / 184T	301	60 / 364T	7.5 / 213T	301	60 / 364T	7.5 / 213T	331	20 / 256T	5 / 184T
61	301(50-SB)	60 / 364T	7.5 / 213T	331	75 / 365T	7.5 / 213T	331	75 / 365T	7.5 / 213T	361	20 / 256T	5 / 184T
COMEFRI												
72	32	75 / 365T	7.5 / 213T	36	100 / 405T	7.5 / 213T	32	75 / 365T	7.5 / 213T	36	100 / 405T	7.5 / 213T
85	36	100 / 405T	7.5 / 213T	40	125 / 444T	10 / 215T	36	100 / 405T	7.5 / 213T	40	125 / 444T	10 / 215T
96	36	100 / 405T	7.5 / 213T	40	125 / 444T	10 / 215T	36	100 / 405T	7.5 / 213T	40	125 / 444T	10 / 215T
110	40	125 / 444T	10 / 215T	44	150 / 445T	15 / 254T	40	125 / 444T	10 / 215T	44	150 / 445T	15 / 254T

** = 7.5HP MOTOR ONLY AVAILABLE IN 3600 RPM

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 14 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

39M FAN SELECTIONS W/ "MIN-MAX" MOTORS (CONT.'D.)

FORWARD CURVE												
UNIT SIZE	SUPPLY						RETURN / EXHAUST					
	A			B			A			B		
	WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME	
		MAX.	MIN.		MAX.	MIN.		MAX.	MIN.		MAX.	MIN.
LAU DESIGN												
03	N/A	N/A	N/A	A9-4A	5 / 184T	0.5 / 56	N/A	N/A	N/A	A9-4A	5 / 184T	0.5 / 56
06	N/A	N/A	N/A	A10-8A	5 / 184T	0.75 / 56	A9-4A(03-SB)	5 / 184T	0.5 / 56	A10-8A	5 / 184T	0.75 / 56
08	A10-8A	7.5 / 213T	3 / 182T	A12-12A	5 / 184T	0.75 / 56	A10-8A	7.5 / 213T	3 / 182T	A12-12A	5 / 184T	0.75 / 56
10	A12-12A	10 / 215T	5 / 184T	A15-15A	5 / 184T	1 / 143T	A12-12A	10 / 215T	5 / 184T	A15-15A	5 / 184T	1 / 143T
12	A12-11A	15 / 254T	5 / 184T	A15-15A	7.5 / 213T	1.5 / 145T	A12-12A(10-SA)	10 / 215T	5 / 184T	A15-15A	7.5 / 213T	1.5 / 145T
14	A15-15A	15 / 254T	5 / 184T	A18-18A	7.5 / 213T	1.5 / 145T	A15-15A	15 / 254T	5 / 184T	A18-18A	7.5 / 213T	1.5 / 145T
17	A15-15A	25 / 284T	7.5 / 213T	A18-18A	10 / 215T	1.5 / 145T	A15-15A	25 / 284T	7.5 / 213T	A18-18A	10 / 215T	1.5 / 145T
21	A15-15A	25 / 284T	7.5 / 213T	A20-18A	15 / 254T	2 / 145T	A18-18A(17-SB)	10 / 215T	1.5 / 145T	A20-18A	15 / 254T	2 / 145T
25	A20-15A	25 / 284T	10 / 215T	A20-18A	15 / 254T	2 / 145T	A18-18A(17-SB)	10 / 215T	1.5 / 145T	A20-18A	15 / 254T	2 / 145T
30	A20-18H	30 / 286T	10 / 215T	A20-20H	20 / 256T	3 / 182T	A20-18H	30 / 286T	10 / 215T	A20-20H	20 / 256T	3 / 182T
36	A22-22H	30 / 286T	15 / 254T	A25-25H	25 / 284T	3 / 182T	A20-20H(30-SB)	20 / 256T	3 / 182T	A25-25H	25 / 284T	3 / 182T
40	A25-20H	30 / 286T	15 / 254T	A25-25H	25 / 284T	3 / 182T	A20-20H(30-SB)	20 / 256T	3 / 182T	A25-25H	25 / 284T	3 / 182T
50	A27-22H	40 / 324T	15 / 254T	A27-27H	30 / 286T	5 / 184T	A25-25H(40-SB)	25 / 284T	3 / 182T	A27-27H	30 / 286T	5 / 184T
61	A27-27H	50 / 326T	20 / 256T	A30-30H	40 / 324T	5 / 184T	A27-27H	50 / 326T	20 / 256T	A30-30H	40 / 324T	5 / 184T
COMEFRI												
72	32	75 / 365T	10 / 215T	36	75 / 365T	10 / 215T	32	75 / 365T	10 / 215T	36	75 / 365T	10 / 215T
85	36	75 / 365T	10 / 215T	40	75 / 365T	10 / 215T	36	75 / 365T	10 / 215T	40	75 / 365T	10 / 215T
96	N/A	N/A	N/A	40	75 / 365T	10 / 215T	N/A	N/A	N/A	40	75 / 365T	10 / 215T
110	N/A	N/A	N/A	40	75 / 365T	10 / 215T	N/A	N/A	N/A	40	75 / 365T	10 / 215T

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

MATERIAL
-
-
-

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

ENGINEERING REQUIREMENTS
Y-002

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 15 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

39M FAN SELECTIONS W/ "MIN-MAX" MOTORS (CONT.'D.)

BELT DRIVE PLENUM FAN

UNIT SIZE	SUPPLY						RETURN / EXHAUST					
	A			B			A			B		
	WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME		WHEEL / FAN SLED CODE	HP / FRAME	
		MAX.	MIN.		MAX.	MIN.		MAX.	MIN.		MAX.	MIN.
LAU BUILT MECHANOVENT DESIGN												
03	N/A	N/A	N/A	123	5 / 184T	0.5 / 56	N/A	N/A	N/A	123	5 / 184T	0.5 / 56
06	N/A	N/A	N/A	153	7.5 / 213T	0.75 / 56	N/A	N/A	N/A	153	7.5 / 213T	0.75 / 56
08	153(06-SB)	7.5 / 213T	0.75 / 56	163	10 / 215T	0.75 / 56	153(06-SB)	7.5 / 213T	0.75 / 56	163	10 / 215T	0.75 / 56
10	N/A	N/A	N/A	183Q	15 / 254T	1 / 143T	N/A	N/A	N/A	183Q	15 / 254T	1 / 143T
12	N/A	N/A	N/A	223Q	20 / 256T	1 / 143T	N/A	N/A	N/A	223Q	20 / 256T	1 / 143T
14	N/A	N/A	N/A	223Q	20 / 256T	1 / 143T	N/A	N/A	N/A	223Q	20 / 256T	1 / 143T
17	223Q(14-SB)	20 / 256T	1 / 143T	243Q	20 / 256T	1.5 / 145T	223Q(14-SB)	20 / 256T	1 / 143T	243Q	20 / 256T	1.5 / 145T
21	243Q(17-SB)	20 / 256T	1.5 / 145T	273Q	25 / 284T	2 / 145T	243Q(17-SB)	20 / 256T	1.5 / 145T	273Q	25 / 284T	2 / 145T
25	273Q(21-SB)	25 / 284T	2 / 145T	303Q	25 / 284T	2 / 145T	273Q(21-SB)	25 / 284T	2 / 145T	303Q	25 / 284T	2 / 145T
30	303Q(25-SB)	25 / 284T	2 / 145T	333Q	30 / 286T	3 / 182T	303Q(25-SB)	25 / 284T	2 / 145T	333Q	30 / 286T	3 / 182T
36	333Q(30-SB)	30 / 286T	3 / 182T	363Q	40 / 324T	3 / 182T	333Q(30-SB)	30 / 286T	3 / 182T	363Q	40 / 324T	3 / 182T
40	333Q(30-SB)	30 / 286T	3 / 182T	363Q	40 / 324T	3 / 182T	363Q	40 / 324T	3 / 182T	403Q	20 / 256T	3 / 182T
50	363Q(40-SB)	40 / 324T	3 / 182T	403Q	50 / 326T	7.5 / 213T	403Q	50 / 326T	7.5 / 213T	443Q	60 / 364T	5 / 184T
61	403Q(50-SB)	50 / 326T	7.5 / 213T	443Q	60 / 364T	5 / 184T	443Q	60 / 364T	5 / 184T	493Q	30 / 286T	5 / 184T
COMEFRI												
72	40HE	75 / 365T	7.5 / 213T	44HE	100 / 405T	7.5 / 213T	40HE	75 / 365T	7.5 / 213T	44HE	100 / 405T	7.5 / 213T
85	44HE	100 / 405T	7.5 / 213T	49HE	125 / 444T	10 / 215T	44HE	100 / 405T	7.5 / 213T	49HE	125 / 444T	10 / 215T
96	49HE	125 / 444T	10 / 215T	55HE	150 / 445T	15 / 254T	49HE	125 / 444T	10 / 215T	55HE	150 / 445T	15 / 254T
110	49HE	125 / 444T	10 / 215T	55HE	150 / 445T	15 / 254T	49HE	125 / 444T	10 / 215T	55HE	150 / 445T	15 / 254T

DIRECT DRIVE PLENUM FAN

UNIT SIZE	FAN SIZE "A"	HP / FRAME		FAN SIZE "B"	HP / FRAME		FAN SIZE "C"	HP / FRAME	
		MAX.	MIN.		MAX.	MIN.		MAX.	MAX.
LAU INDUSTRIES									
03	105	5 / 184T	0.5 / 56	122	5 / 184T	0.5 / 56	N/A	N/A	N/A
06	135	7.5 / 213T	1 / 143T	150	7.5 / 215T	1 / 143T	165	10 / 215T	1 / 143T
08	150	7.5 / 215T	1 / 143T	165	10 / 215T	1 / 143T	182	15 / 254T	1 / 143T
10	165	10 / 215T	1 / 143T	182	15 / 254T	1 / 143T	200	15 / 256T	1 / 143T
12	182	15 / 254T	1 / 143T	200	15 / 256T	1 / 143T	222	20 / 256T	1 / 143T
14	200	15 / 256T	1 / 143T	222	20 / 256T	1 / 143T	245	20 / 256T	3 / 182T
17	222	20 / 256T	1 / 143T	245	20 / 256T	3 / 182T	270	25 / 284T	5 / 184T
21	245	20 / 256T	3 / 182T	270	25 / 284T	5 / 184T	300	30 / 324T	7.5 / 213T
25	270	25 / 284T	5 / 184T	300	30 / 324T	7.5 / 213T	330	40 / 364T	10 / 215T
30	270	25 / 284T	5 / 184T	330	40 / 364T	10 / 215T	365	50 / 364T	20 / 256T
36	300	30 / 324T	7.5 / 213T	365	50 / 364T	20 / 256T	402	50 / 365T	20 / 256T
40	330	40 / 364T	10 / 215T	365	50 / 364T	20 / 256T	402	50 / 365T	20 / 256T
50	365	50 / 364T	20 / 256T	402	50 / 365T	20 / 256T	N/A	N/A	N/A
61	365	50 / 364T	20 / 256T	402	50 / 365T	20 / 256T	N/A	N/A	N/A
72	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
85	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
96	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
110	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

MATERIAL
-
-
-

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

ENGINEERING REQUIREMENTS
Y-002

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 16 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

	DENOTES UTILITY PART	DENOTES HI-EFF. MOTOR	HORSEPOWER		VOLTAGE		R.P.M.	TYPE	FRAME	INSULATION CLASS	APPLICATION MOUNTING (•)	PURCHASED MOUNTING	VENDOR DESIGNATION	FAN APPLICATION	PART REVISION LEVEL	
POSITION	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
EXAMPLE	9	3	M	R	0	1	2	5	B	A	0	2	0	1	0	3	S	•

REFERENCE POSITION 18

EXAMPLE:

93MR0125BA020103SB

1/2 HORSEPOWER, 208/230/460-3-60, 1800 (RPM) 60HZ, OPEN DRIP-PROOF, 56 FRAME, VENDORS (STD.) CLASS INSULATION, F1 MOUNTING, SUPPLIER: A.O. SMITH, SUPPLY FAN APPLICATION, (REV. B).

DIGITS

5 & 6 — HORSEPOWER

01 = 1/2	12 = 25
02 = 3/4	13 = 30
03 = 1	14 = 40
04 = 1 1/2	15 = 50
05 = 2	16 = 60
06 = 3	17 = 75
07 = 5	18 = 100
08 = 7 1/2	19 = 125
09 = 10	20 = 150
10 = 15	21 = 200
11 = 20	

7 & 8 — VOLTAGE

02 = 115/230-1-60
03 = 230-1-60
05 = 230/460-3-60
07 = 575-3-60
18 = 460-3-60
25 = 208/230/460-3-60
28 = 200/400-3-50 (190/380-3-50)

9 — R.P.M. (SYN.)

B = 1800	60	HZ
C = 3600		
E = 1500	50	HZ
F = 3000		

10 — TYPE

A = OPEN DRIP PROOF

C = TOTALLY ENCLOSED - FAN COOLED — XL

XL - FOR ACROSS LINE MOTORS SPECIFY DUAL VOLTAGE, WHERE POSSIBLE.

11 & 12 — FRAME

01 = 48	38 = 365T
02 = 56	39 = 404T
25 = 143T	40 = 405T
26 = 145T	41 = 444T
27 = 182T	42 = 445T
28 = 184T	43 = 286TS
29 = 213T	44 = 324TS
30 = 215T	45 = 326TS
31 = 254T	46 = 364TS
32 = 256T	47 = 365TS
33 = 284T	48 = 405TS
34 = 286T	51 = 404TS
35 = 324T	52 = 444TS
36 = 326T	53 = 445TS
37 = 364T	54 = 284TS

13 — INSULATION CLASS

Ø = VENDORS (STD.)


14 — APPLICATION MOUNTING

1 = F1 | 2 = F2 | 9 = F3 — (*)

(*) F3 BOX LOCATION MAY BE SUBSTITUTED FOR EITHER F1 OR F2.

(*) F3 MOUNTING MAY ONLY BE AVAILABLE ON ODP MOTORS.

MOUNTING NUMBERS APPLY WHEN FACING MOTOR SHAFT (●) END, (☑) CONDUIT BOX.



15 — PURCHASED MOUNTING

Ø = ▲

▲ = SAME AS APPLICATION MOUNTING

RESILIENT MOUNTS WILL BE ACCEPTABLE UP TO AND INCLUDING 5 H.P. MOTORS ONLY.

16 — SUPPLIER DESIGNATION

3 = A.O. SMITH
E = BALDOR
I = GENERAL ELECTRIC
X = OPTIONAL (ANY OF ABOVE)

17 — FAN APPLICATION

R = RETURN/EXHAUST
S = SUPPLY

18 — REVISION LEVEL

(SEE PART REV. NOTE)

NOTE : THIS CHART FOR REFERENCE ONLY. REFER TO FILE 39MA40000006.MS FOR EXACT DATA.

	SINGLE PHASE MOTORS				(3) PHASE MOTORS							
	OPEN DRIP-PROOF (60HZ)		TOTALLY ENCLOSED, FAN-COOLED (60HZ)		OPEN DRIP-PROOF (60HZ)		TOTALLY ENCLOSED, FAN-COOLED (60HZ)		OPEN DRIP-PROOF (50HZ)		TOTALLY ENCLOSED, FAN-COOLED (50HZ)	
	3600	1800	3600	1800	3600	1800	3600	1800	3000	1500	3000	1500
HP	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)
1/2	56	56	56	56	56	56	56	56	56•	56•	56•	56
3/4	56	56	56	56	56	56	56	56	56•	56•	56•	56
1	56	143T	56	143T	56	143T	56	143T	56•	143T	56•	143T
1-1/2	56	145T	56	145T	143T	145T	143T	145T	143T•	145T	143T•	145T
2	145T	145T	56	182T	145T	145T	145T	145T	145T•	145T	182T	145T
3	182T	184T	184T	184T	145T	182T	182T	182T	182T	182T	184T	182T
5	184T	184T	184T	213T	182T	184T	184T	184T	184T	184T	213T	184T
7-1/2	213T•	215T•	213T•	215T•	184T	213T	213T	213T	213T	213T	215T	213T
10	-	-	-	-	213T	215T	215T	215T	215T	215T	254T	215T
15	-	-	-	-	215T	254T	254T	254T	254T	254T	256T	254T
20	-	-	-	-	254T	256T	256T	256T	256T	256T	284T	256T
25	-	-	-	-	256T	284T	284TS	284T	284T	284T	286T	284T
30	-	-	-	-	284TS	286T	286TS	286T	286T	286T	324T	286T
40	-	-	-	-	286TS	324T	324TS	324T	286T•	324T	324TS•	324T
50	-	-	-	-	324TS	326T	326TS	326T	324T•	326T	326TS•	326T
60	-	-	-	-	326TS	364T	364TS	364T	326T•	364T	364TS•	364T
75	-	-	-	-	364TS	365T	365TS	365T	364T•	365T	365TS•	365T
100	-	-	-	-	365TS	404T	405TS	405T	365T•	404T•	405TS•	405T•
125	-	-	-	-	404TS	405T	444TS	444T	404T•	405T•	444TS•	444T•
150	-	-	-	-	405TS	444T	445TS	445T	405T•	444T•	445TS•	445T•
200	-	-	-	-	444TS	445T	-	-	-	-	-	-

(S) = SHORT SHAFT

• DENOTES MOTOR FRAME SIZES PER NEMA MG 1-2007

NOTE (PART) REVISION:

A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT.
REFERENCE DRAWING (93MR500002) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.

NOTES:

1. FOR PROPER DIMEMSION, REF. CHARTS ON SHEETS 1 THRU 4 OF (93MR500002 DRAWING) WITH CORRECT FRAME SIZE, MOTOR, TYPE, AND VENDOR.
2. SEE SHT. #2 (93MR500002 DRAWING) FOR GENERAL PURCHASE SPECIFICATIONS.
3. MOTORS SHALL HAVE A MINIMUM 1.15 SERVICE FACTOR AT ALL MOTOR NAMEPLATE VOLTAGES.

DRAWING RELEASE LEVEL: Under Review		Carrier — A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731	TITLE: PART NO. DEFINN — 39MA P/N DEFINITION	
	ENGINEERING: PH 09.14.12 — MANUFACTURING: -		
ENGINEERING REQUIREMENTS: Y-002	DRAFTER: ETR 09.14.12 — CHECKER: ETR 09.14.12	SIZE: D — DRAWING NUMBER: 39MA40000006 SHEET 17 OF 31 — REV: AA	
WEIGHT: -			
SURFACE FINISH: - — MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER — SCALE: N/A — DISTRIBUTION: CMX	

	DENOTES UTILITY PART	DENOTES PREM.-EFF. MOTOR	HORSEPOWER		VOLTAGE		R.P.M.	TYPE	FRAME		INSULATION CLASS/ SHAFT GROUNDING RING	APPLICATION MOUNTING	PURCHASED MOUNTING	VENDOR DESIGNATION	FAN APPLICATION	PART REVISION LEVEL
POSITION	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
EXAMPLE	9	3	M	S	0	9	2	5	B	A	3	0	0	1	0	B	S	•

REFERENCE POSITION 18

EXAMPLE:

93MS0925BA30010BSB

10 HORSEPOWER, 208/230/460-3-60, 1800 (RPM) 60HZ, OPEN DRIP PROOF, 215T FRAME, VENDORS (STD.) INSULATION CLASS/NO SHAFT GROUNDING RING, F1 MOUNTING, SUPPLIER: A.O. SMITH, SUPPLY FAN APPLICATION, (REV. B).

DIGITS

5 & 6 — HORSEPOWER

03 = 1
04 = 1 1/2
05 = 2
06 = 3
07 = 5
08 = 7 1/2
09 = 10
10 = 15
11 = 20
12 = 25
13 = 30
14 = 40
15 = 50
16 = 60
17 = 75
18 = 100
19 = 125
20 = 150

7 & 8 — VOLTAGE

05 = 230/460-3-60
07 = 575-3-60
18 = 460-3-60
21 = 400-3-50
*25 = 208/230/460-3-60
28 = 200/400-3-50 (190/380-3-50)
30 = 230/400-3-50

*SEE NOTE #8

9 — R.P.M. (SYN.)

A = 1200 | 60
B = 1800 | 60
C = 3600 | HZ
D = 1000 | 50
E = 1500 | 50
F = 3000 | HZ

10 — TYPE

A = OPEN DRIP PROOF
C = TOTALLY ENCLOSED - FAN COOLED — XL

XL - FOR ACROSS LINE MOTORS SPECIFY DUAL VOLTAGE, WHERE POSSIBLE.

11 & 12 — FRAME

02 = 56
25 = 143T
26 = 145T
27 = 182T
28 = 184T
29 = 213T
30 = 215T
31 = 254T
32 = 256T
33 = 284T
34 = 286T
35 = 324T
36 = 326T
37 = 364T
38 = 365T
39 = 404T
40 = 405T
41 = 444T
42 = 445T
54 = 284TS
43 = 286TS
44 = 324TS
45 = 326TS
46 = 364TS
47 = 365TS
48 = 405TS
52 = 444TS
53 = 445TS


13 — INSULATION CLASS / SHAFT GROUNDING RING

0 = SUPPLIER STD. / NO
1 = SUPPLIER STD./ YES

14 — APPLICATION MOUNTING

1 = F1 2 = F2 9 = F3 *

MOUNTING NUMBERS APPLY WHEN FACING MOTOR SHAFT (●) END, (⊠) CONDUIT BOX.



(*) F3 ONLY AVAILABLE ON ODP MOTORS AND MAY BE SUBSTITUTED FOR EITHER F1 OR F2.

15 — PURCHASED MOUNTING

Ø : ▲

▲ = SAME AS APPLICATION MOUNTING

MOTORS IN 143T, 145T MAY BE ACCEPTED WITH NO CONDUIT BOX ON SIDE, BUT WITH CONDUIT CONNECTION ON REAR OF MOTOR.

16 — SUPPLIER DESIGNATION

B = A.O. SMITH
E = BALDOR
F = GENERAL ELECTRIC
X = OPTIONAL (ANY OF ABOVE)

17 — FAN APPLICATION

R = RETURN/ EXHAUST
S = SUPPLY

18 — REVISION LEVEL

(SEE PART REV. NOTE)

NOTE : THIS CHART FOR REFERENCE ONLY. REFER TO FILE 39MA40000006_MS FOR EXACT DATA.

	OPEN DRIP-PROOF (60HZ)			TOTALLY ENCLOSED, FAN-COOLED (60HZ)			OPEN DRIP-PROOF (50HZ)			TOTALLY ENCLOSED, FAN-COOLED (50HZ)		
	3600	1800	1200	3600	1800	1200	3000	1500	1000	3000	1500	1000
HP	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)	(RPM)
1	56	143T	145T	56	143T	145T	56•	143T	145T	56•	143T	145T
1-1/2	143T	145T	182T	143T	145T	182T	143T•	145T	182T	143T•	145T	182T
2	145T	145T	184T	145T	145T	184T	145T•	145T	184T	145T•	145T	184T
3	145T	182T	213T	182T	182T	213T	182T	182T	213T	184T	182T	213T
5	182T	184T	215T	184T	184T	215T	184T	184T	215T	213T	184T	215T
7-1/2	184T	213T	254T	213T	213T	254T	213T	213T	254T	215T	213T	254T
10	213T	215T	256T	215T	215T	256T	215T	215T	256T	254T	215T	256T
15	215T	254T	284T	254T	254T	284T	254T	254T	284T	256T	254T	284T
20	254T	256T	286T	256T	256T	286T	256T	256T	286T	284T	256T	286T
25	256T	284T	324T	284TS	284T	324T	284T	284T	324T	286T	284T	324T
30	284TS	286T	326T	286TS	286T	326T	286T	286T	326T	324T	286T	326T
40	286TS	324T	364T	324TS	324T	364T	324T	324T	364T	326T	324T	364T
50	324TS	326T	365T	326TS	326T	365T	326T	326T	365T	364T	326T	365T
60	326TS	364T	-	364TS	364T	-	364T	364T	-	365T	364T	-
75	364TS	365T	-	365TS	365T	-	365T	365T	-	365TS•	365T	-
100	365TS	404T	-	405TS	405T	-	365T•	404T	-	405TS•	405T	-
125	404T	405T	-	444TS	444T	-	404T•	405T•	-	444TS•	444TS•	-
150	444T	444T	-	445TS	445T	-	444T•	445T•	-	445TS•	445TS•	-

(S) = SHORT SHAFT

• DENOTES MOTOR FRAME SIZES PER NEMA MG 1-2007

FRAMES BELOW —— DO NOT FIT COMPUTER PROGRAM. WILL NOT ACCEPT SECOND ALPHA.

NOTE (PART) REVISION:

A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT.
REFERENCE DRAWING (93MS500002) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.

NOTES:

1. FOR PROPER DIMEMSION, REF. CHARTS ON SHEETS 1 THRU 4 OF (93MS500002 DRAWING) WITH CORRECT FRAME SIZE, MOTOR, TYPE, AND VENDOR.
2. SEE SHT. #2 (93MS500002 DRAWING) FOR GENERAL PURCHASE SPECIFICATIONS.
3. ALL 3 PHASE, 1000 AND 1200 RPM MOTORS SHALL BE ABLE TO OPERATE UP TO 1500 AND 1800 RPM.
4. ALL 3 PHASE, 1500 AND 1800 RPM MOTORS SHALL BE ABLE TO OPERATE UP TO 3000 AND 3600 RPM.
5. ALL 3 PHASE, 3000 AND 3600 RPM MOTORS UP TO AND INCLUDING 20 HP SHALL BE ABLE TO OPERATE UP TO 5000 AND 6000 RPM.
6. ALL 3 PHASE, 3000 AND 3600 RPM MOTORS OVER 20 HP SHALL BE ABLE TO OPERATE UP TO 4166 AND 5000 RPM.
7. MOTORS SHALL HAVE A MINIMUM 1.15 SERVICE FACTOR AT ALL MOTOR NAMEPLATE VOLTAGES.
8. MOTORS NAMEPLATED AS VOLTAGE 230/460 WITH A NOTE ON THE NAME PLATE "SUITABLE FOR USE AT 208V" SHALL BE ACCEPTABLE.

DRAWING RELEASE LEVEL: Under Review		Carrier, A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731	TITLE: PART NO. DEFINN — 39MA P/N DEFINITION	
ENGINEERING REQUIREMENTS: Y-002	ENGINEERING: PH 09.14.12 / MANUFACTURING: -	SIZE: D	DRAWING NUMBER: 39MA40000006 SHEET 18 OF 31
WEIGHT: -	DRAFTER: ETR 09.14.12 / CHECKER: ETR 09.14.12		REV: AA
SURFACE FINISH: - / MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER	SCALE: N/A / DISTRIBUTION: CMX

93MK / 93MV (DRIVE PACKAGE) P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	N	N	A	A	N	N	A	A	N	N	N	N	A	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COMPONENT DESCRIPTION (SAMPLE)	9	3	M	K	B	X	B	D	0	1	B	A	1	1	0	0	B	•

REFERENCE POSITION 18

(*) NON-RELEASED DATA

POSITIONS 1-3
MODEL NO.
93M

POSITION 4
DRIVE TYPE.
K = CONSTANT PITCH DRIVE
V = VARIABLE PITCH DRIVE

POSITION 5 - SIZE	
CODE	SIZE
B	03
C	06
D	08
F	10
G	12
H	14
J	17
K	21
L	25
M	30
N	36
P	40
Q	50
R	61
S	72
T	85
V	96
W	110

POSITION 6	
CODE	
X	ALWAYS

POSITION 7 - FAN TYPE					
CODE	AF	FC	PF	WHEEL SIZE	APPLICATION
B	Y-C	N	N	A	SUPPLY
C	Y-C	N	N	B	SUPPLY
D	N	Y-C	N	A	SUPPLY
F	N	Y-C	N	B	SUPPLY
G	N	Y-L	N	A	SUPPLY
H	N	Y-L	N	B	SUPPLY
J	N	N	Y-C	A	SUPPLY
K	N	N	Y-C	B	SUPPLY
L	Y-C	N	N	A	RETURN/EXHAUST
M	Y-C	N	N	B	RETURN/EXHAUST
N	N	Y-C	N	A	RETURN/EXHAUST
P	N	Y-C	N	B	RETURN/EXHAUST
Q	N	Y-L	N	A	RETURN/EXHAUST
R	N	Y-L	N	B	RETURN/EXHAUST
S	N	N	Y-C	A	RETURN/EXHAUST
T	N	N	Y-C	B	RETURN/EXHAUST
1	Y-LM	N	N	B	SUPPLY
2	Y-LM	N	N	B	RETURN/EXHAUST
3	N	N	Y-LM	B	SUPPLY
4	N	N	Y-LM	B	RETURN/EXHAUST
5	Y-LM	N	N	A	SUPPLY
6	Y-LM	N	N	A	RETURN/EXHAUST
7	N	N	Y-LM	A	SUPPLY
8	N	N	Y-LM	A	RETURN/EXHAUST

C = COMEFRI
L = LAU INDUSTRIES FAN (UNIT SIZES 03-61)
LM = LAU BUILT MECHANOVENT DESIGN FAN (UNIT SIZES 03-61)

POSITION 8			
DISCHARGE	MULT. BELT DRIVE REQ.	DISCHARGE	MULT. BELT DRIVE REQ.
B = BHF	N	M = BHF	Y
C = BHR	N	N = BHR	Y
D = DBF	N	P = DBF	Y
F = DBR	N	Q = DBR	Y
G = THF	N	R = THF	Y
H = THR	N	S = THR	Y
J = UBF	N	T = UBF	Y
K = UBR	N	V = UBR	Y
L = NONE (PF)	N	W = NONE (PF)	Y

POSITIONS 9-10
MOTOR HORSEPOWER
01 = 1/2 H.P.
02 = 3/4 H.P.
03 = 1 H.P.
04 = 1 1/2 H.P.
05 = 2 H.P.
06 = 3 H.P.
07 = 5 H.P.
08 = 7 1/2 H.P.
09 = 10 H.P.
10 = 15 H.P.
11 = 20 H.P.
12 = 25 H.P.
13 = 30 H.P.
14 = 40 H.P.
15 = 50 H.P.
16 = 60 H.P.
17 = 75 H.P.
18 = 100 H.P.
19 = 125 H.P.
20 = 150 H.P.

POSITION 11		
CODE	MOTOR (RPM)	MOUNTING
B	1800 (60HZ)	SIDE
C	3600 (60HZ)	SIDE
E	1500 (50HZ)	SIDE
F	3000 (50HZ)	SIDE
G	1800 (60HZ)	REAR
H	3600 (60HZ)	REAR
J	1500 (50HZ)	REAR
K	3000 (50HZ)	REAR

POSITION 12		
	MOTOR FRAME	93MR/MS MOTOR FRAME CODE
A	56	02
B	143 T	25
C	145 T	26
D	182 T	27
E	184 T	28
F	213 T	29
G	215 T	30
H	254 T	31
J	256 T	32
K	284 T	33
L	286 T	34
M	324 T	35
N	326 T	36
P	364 T	37
Q	365 T	38
R	404 T	39
S	405 T	40
T	444 T	41
U	445 T	42
V	284 TS	54
W	286 TS	43
Y	324 TS	44
Z	326 TS	45
1	364 TS	46
2	365 TS	47
3	405 TS	48
4	444 TS	52
5	445 TS	53

POSITIONS 13-16
FAN SPEED (RPM)
NOTE: POSITION 13 = 0 IF (RPM) IS 3 DIGITS.

POSITIONS 17 - SERVICE FACTOR/ROTOR								
CODE	STD. BEARINGS (200K)	EXT. LIFE BEARINGS (500K)	CLASS I	CLASS II	CLASS III	1.5 SERVICE FACTOR	1.2 SERVICE FACTOR	EXTRA SET BELTS
B	Y	N	Y	N	N	Y	N	N
C	Y	N	N	Y	N	Y	N	N
D	N	Y	Y	N	N	Y	N	N
F	N	Y	N	Y	N	Y	N	N
*G	N	Y	N	N	Y	Y	N	N
H	Y	N	Y	N	N	N	Y	N
J	Y	N	N	Y	N	N	Y	N
K	N	Y	Y	N	N	N	Y	N
L	N	Y	N	Y	N	N	Y	N
*M	N	Y	N	N	Y	N	Y	N
N	Y	N	Y	N	N	Y	N	Y
P	Y	N	N	Y	N	Y	N	Y
Q	N	Y	Y	N	N	Y	N	Y
R	N	Y	N	Y	N	Y	N	Y
*S	N	Y	N	N	Y	Y	N	Y
T	Y	N	Y	N	N	N	Y	Y
V	Y	N	N	Y	N	N	Y	Y
W	N	Y	Y	N	N	N	Y	Y
Y	N	Y	N	Y	N	N	Y	Y
*Z	N	Y	N	N	Y	N	Y	Y

POSITION 18
DRIVE PACKAGE REVISION LEVEL
(SEE NOTE *1)

NOTES:
1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**
2. DRIVE CENTERLINE DISTANCES AND FAN SHAFT DIAMETERS ARE ON EXCEL SPREADSHEET 39MA40000006_DC.XLS.

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± -°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 19 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

95GG (FLOOR SCREEN) P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A/N	A/N	N	N	N	N	N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95GG "FLOOR SCREEN" PART NO. DESCRIPTION (SAMPLE)	9	5	G	G	X	X	0	2	4	2	5	X	0	1	2	2	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95GG

POSITIONS 5-6	
CODE	
X	ALWAYS

POSITIONS 7-9
FLOOR SCREEN DIM. "W" WIDTH (in.)
WHOLE DIMENSIONAL INPUT DESIGNATION. EXAMPLE 024 WOULD READ 24".

POSITIONS 10-11
FLOOR SCREEN DIM. "W" WIDTH (in.)
DECIMAL DIMENSIONAL INPUT DESIGNATION. EXAMPLE 25 WOULD READ .25"

POSITION 12	
CODE	
X	ALWAYS

POSITIONS 13-15
FLOOR SCREEN DIM. "H" HEIGHT (in.)
WHOLE DIMENSIONAL INPUT DESIGNATION. EXAMPLE 012 WOULD READ 12".

POSITIONS 16-17
FLOOR SCREEN DIM. "H" HEIGHT (in.)
DECIMAL DIMENSIONAL INPUT DESIGNATION. EXAMPLE 25 WOULD READ .25"

POSITION 18
FLOOR SCREEN REVISION LEVEL
(SEE NOTE *1)

FOR "FLOOR SCREEN" REFERENCE DRAWING 39MA50062900

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

DRAWING RELEASE LEVEL: Under Review		Carrier, A United Technologies Company	
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 1 DEC ±- 2 DEC ±- 3 DEC ±- ANG ±-°	THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.	
MATERIAL: - - -	AUTHORIZATION NUMBER: ECN# 1044731	TITLE: PART NO. DEFINN 39MA P/N DEFINITION	
	ENGINEERING: PH 09.14.12 / MANUFACTURING: -	SIZE: D	DRAWING NUMBER: 39MA40000006 SHEET 20 OF 31 / REV: AA
ENGINEERING REQUIREMENTS: Y-002	DRAFTER: ETR 09.14.12 / CHECKER: ETR 09.14.12		
WEIGHT: -			
SURFACE FINISH: - / MFG/PURCH: -	CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7	NEXT DRAWING: PER ORDER / SCALE: N/A / DISTRIBUTION: CMX	

95GX ISOLATOR "RAIL/COVER" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A/N	A	A/N	N	N	N	N	N	N	A/N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95GX ISOLATOR "RAIL/COVER" PART NO. DESCRIPTION (SAMPLE)	9	5	G	X	R	G	•	0	0	0	0	0	1	N	0	0	1	•

REFERENCE POSITION 7

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95GX = ISOLATOR "RAIL/COVER"

POSITION 5 - LOCATION	
CODE	LOCATION
L	LEFT RAIL (PARTIAL)
M	LEFT RAIL (FULL)
R	RIGHT RAIL (PARTIAL)
S	RIGHT RAIL (FULL)
1	LEFT RAIL COVER (PARTIAL)
2	RIGHT RAIL COVER (PARTIAL)
3	LEFT RAIL COVER (FULL)
4	RIGHT RAIL COVER (FULL)

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
(a)	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
N/A	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
(b)	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
N/A	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.
(a) POSITION "5" IS EQUAL TO "L","M","R" OR "S" ONLY.
(b) POSITION "5" IS EQUAL TO "1","2","3" OR "4" ONLY.

POSITION 7
39M (ULP) REVISION LEVEL
(SEE NOTE #1)

POSITIONS 8-13
ODOMETER
000001 THRU 999999 = STANDARD UNIT

POSITION 18
ISOLATOR "RAIL/COVER" REVISION LEVEL
(SEE NOTE #1)

POSITION 14 - BASERAIL HEIGHT	
CODE	HEIGHT
N	NOT 4" BASERAIL
4	4" BASERAIL

POSITIONS 15-17 - SEQUENCE	
CODE	SEQUENCE
000-999	000 - 999

NOTE:
THE SEQUENCE IS AT THE UNIT LEVEL "NOT" AT THE INDIVIDUAL SHIPPING PIECE. THESE PARTS WOULD BE TIED TO SAME SEQUENCE NO. AS RESPECTIVE BASE AND FRAME RAILS.

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "ISOLATOR RAIL" REFERENCE DRAWING 39MA50064700
FOR ISOLATOR RAIL "COVER" REFERENCE DRAWING 39MA50064800

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL
-
-
-

ENGINEERING REQUIREMENTS
Y-002

WEIGHT: -

SURFACE FINISH: -
MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± -
2 DEC ± -
3 DEC ± -
ANG ± °

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING: PH 09.14.12
MANUFACTURING: -

DRAFTER: ETR 09.14.12
CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D
DRAWING NUMBER: 39MA40000006
SHEET 21 OF 31
REV: AA

NEXT DRAWING: PER ORDER
SCALE: N/A
DISTRIBUTION: CMX

95VB "COVER / SPACER" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	N	N	N	N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VB "COVER / SPACER" PART NO. DESCRIPTION (SAMPLE)	9	5	V	B	B	K	X	1	2	3	4	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VB = COVER / SPACER (DOWNBLAST FAN)

POSITION 5 - LOCATION	
CODE	LOCATION
B	BOTTOM (COVER)
T	TOP (SPACER)

POSITION 6 - MATERIAL			
	CODE	SPECIFICATION	FINISH
N/A	B	VA04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VA04-16, 16 GAUGE	
N/A	D	VA04-16, 20 GAUGE	
N/A	U	VA04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
(a)	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
(b)	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
(a)	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.
(a) POSITION "5" IS EQUAL TO "T" ONLY.
(b) POSITION "5" IS EQUAL TO "B" ONLY.

POSITION 7	
CODE	
X	ALWAYS

POSITIONS 8-11
"COVER" / "SPACER" DIM. "W" WIDTH (in.)
WHOLE DIMENSIONAL INPUT + (2) DECIMAL PLACE DESIGNATION. EX. 1234 WOULD READ 12.34".

POSITION 12	
CODE	
X	ALWAYS

POSITIONS 13-17
"COVER" / "SPACER" DIM. "L" LENGTH (in.)
WHOLE DIMENSIONAL INPUT + (2) DECIMAL PLACE DESIGNATION. EX. 12345 = 123.45".

POSITION 18
"SPACER / COVER" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR BOTTOM "COVER" REFERENCE DRAWING 39MA50067900
FOR TOP "SPACER" REFERENCE DRAWING 39MA50067800

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ± - | 2 DEC ± - | 3 DEC ± - | ANG ± °

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 22 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

95VF "CHANNEL,PANEL" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	A/N	A/N	A/N	A/N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VF CHANNEL,PANEL PART NO. DESCRIPTION (SAMPLE)	9	5	V	F	B	K	X	X	X	X	X	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VF

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VA04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VA04-16, 16 GAUGE	
N/A	D	VA04-16, 20 GAUGE	
N/A	U	VA04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITIONS 7-12	
CODE	
X	ALWAYS

POSITIONS 13-17
FAN OPENING DIM. (in.)
FAN OPENING DIMENSION *100 12345 = 123.45

POSITION 18
"CHANNEL,PANEL" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "CHANNEL,PANEL" REFERENCE DRAWING 39MA50068300

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - / - / -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING	MANUFACTURING
PH 09.14.12	- -

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 23 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

95VG "BRACKET,ZEE" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	A/N	A/N	A/N	A/N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VG BRACKET,ZEE PART NO. DESCRIPTION (SAMPLE)	9	5	V	G	B	K	X	X	X	X	X	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VG

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITIONS 7-12	
CODE	
X	ALWAYS

POSITIONS 13-17
FAN OPENING DIM. (in.)
FAN OPENING DIMENSION *100 12345 = 123.45

POSITION 18
"BRACKET,ZEE" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "BRACKET,ZEE" REFERENCE DRAWING 39MA50068400

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING	MANUFACTURING
PH 09.14.12	-

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 24 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

95VH "BRACKET,ZEE" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	A/N	A/N	A/N	A/N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VH BRACKET,ZEE PART NO. DESCRIPTION (SAMPLE)	9	5	V	H	B	K	X	X	X	X	X	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VH

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITIONS 7-12	
CODE	
X	ALWAYS

POSITIONS 13-17
FAN OPENING DIM. (in.)
FAN OPENING DIMENSION *100 12345 = 123.45

POSITION 18
"BRACKET,ZEE" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "BRACKET,ZEE" REFERENCE DRAWING 39MA50068500

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 25 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

95VJ "ANGLE,DUCT" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	A/N	A/N	A/N	A/N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VJ ANGLE,DUCT PART NO. DESCRIPTION (SAMPLE)	9	5	V	J	B	K	X	X	X	X	X	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VJ

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITIONS 7-12	
CODE	
X	ALWAYS

POSITIONS 13-17
FAN OPENING DIM. (in.)
FAN OPENING DIMENSION *100 12345 = 123.45

POSITION 18
"ANGLE,DUCT" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "ANGLE,DUCT" REFERENCE DRAWING 39MA50068600

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

MATERIAL: -

AUTHORIZATION NUMBER: ECN# 1044731

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

ENGINEERING	MANUFACTURING
PH 09.14.12	-

ENGINEERING REQUIREMENTS: Y-002

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

WEIGHT: -

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 26 OF 31	AA

SURFACE FINISH	MFG/PURCH
-	-

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

95VK "PANEL,FAN" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A	N	N	N	N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VK PANEL,FAN PART NO. DESCRIPTION (SAMPLE)	9	5	V	K	B	K	X	1	2	3	4	X	0	1	2	3	4	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VK

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITION 7 - AXIS	
CODE	AXIS
X	X AXIS
Y	Y AXIS
Z	Z AXIS

POSITIONS 8-11
DIMENSION "A" (in.)
FAN OPENING DIMENSION *100 1234 = 12.34"

POSITION 12	
CODE	
X	ALWAYS

POSITIONS 13-17
DIMENSION "B" (in.)
PART HEIGHT DIMENSION *100 1234 = 12.34"

POSITION 18
"PANEL,FAN" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "PANEL,FAN" REFERENCE DRAWING 39MA50068700

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 27 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX

95VL "ANGLE,DUCT" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	A/N	A/N	A/N	A/N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VL ANGLE,DUCT PART NO. DESCRIPTION (SAMPLE)	9	5	V	L	B	K	X	X	X	X	X	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VL

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITIONS 7-12	
CODE	
X	ALWAYS

POSITIONS 13-17
FAN OPENING DIM. (in.)
FAN OPENING DIMENSION *100 12345 = 123.45

POSITION 18
"ANGLE,DUCT" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "ANGLE,DUCT" REFERENCE DRAWING 39MA50068800

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

MATERIAL: - - -

AUTHORIZATION NUMBER: ECN# 1044731

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

ENGINEERING	MANUFACTURING
PH 09.14.12	- -

ENGINEERING REQUIREMENTS: Y-002

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 28 OF 31	AA

WEIGHT: -

SURFACE FINISH	MFG/PURCH
-	-

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

95VM "ANGLE,DUCT" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A/N	A	A/N	A/N	A/N	A/N	A/N	A/N	N	N	N	N	N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95VM ANGLE,DUCT PART NO. DESCRIPTION (SAMPLE)	9	5	V	M	X	K	X	X	X	X	X	X	1	2	3	4	5	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95VM

POSITION 5 - LOCATION	
CODE	LOCATION
B	NOT DB, PANEL
C	NOT DB, BULKHEAD
D	DB, PANEL

	POSITION 6 - MATERIAL		
	CODE	SPECIFICATION	FINISH
N/A	B	VN04-16, 12 GAUGE	STAINLESS STEEL 304
N/A	C	VN04-16, 16 GAUGE	
N/A	D	VN04-16, 20 GAUGE	
N/A	U	VN04-16, 26 GAUGE	
N/A	F	VA03-145, 14 GAUGE	G90
N/A	G	VA03-56, 10 GAUGE	GALVANIZED
N/A	H	VA03-56, 12 GAUGE	
N/A	J	VA03-56, 14 GAUGE	
	K	VA03-56, 16 GAUGE	
N/A	L	VA03-56, 18 GAUGE	
N/A	M	VA03-56, 20 GAUGE	
N/A	V	VA03-56, 26 GAUGE	
N/A	N	VA05-61, 10 GAUGE	PRE-PAINT
N/A	P	VA05-61, 12 GAUGE	
N/A	Q	VA05-61, 14 GAUGE	
	R	VA05-61, 16 GAUGE	
N/A	S	VA05-61, 18 GAUGE	
N/A	T	VA05-61, 20 GAUGE	
N/A	W	VA05-61, 26 GAUGE	
	X	SEE DRAWING FOR MATERIAL SPECIFICATION	
N/A	Y	VA05-58, 14 GAUGE	AGION (BOTHSIDES)
N/A	Z	VA05-58, 16 GAUGE	

N/A = CODE OPTION IS NOT AVAILABLE.

POSITIONS 7-12	
CODE	
X	ALWAYS

POSITIONS 13-17
FAN OPENING DIM. (in.)
FAN OPENING DIMENSION *100 12345 = 123.45

POSITION 18
"ANGLE,DUCT" REVISION LEVEL
(SEE NOTE *1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

FOR "ANGLE,DUCT" REFERENCE DRAWING 39MA50068900

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

MATERIAL: - - -

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

ENGINEERING REQUIREMENTS: Y-002

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

WEIGHT: -

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 29 OF 31	AA

SURFACE FINISH	MFG/PURCH	CAD MODEL (INTERNAL USE ONLY)	NEXT DRAWING	SCALE	DISTRIBUTION
-	-	39MA40000006 AA.7	PER ORDER	N/A	CMX

95XB "FAN WHEEL" P/N CONFIGURATION

ALPHA/NUMERIC	N	N	A	A	A	A	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A/N	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
95XB "FAN WHEEL" PART NO. DESCRIPTION (SAMPLE)	9	5	X	B	F	F	A	F	C	F	0	1	3	2	X	X	X	•

REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
95XB

POSITION 5 - SIZE	
CODE	SIZE
B	03
C	06
D	08
F	10
G	12
H	14
J	17
K	21
L	25
M	30
N	36
P	40
Q	50
R	61
S	72
T	85
V	96
W	110

POSITION 6 - TYPE	
CODE	TYPE
B	BLOW-THRU SUPPLY
F	ALL OTHERS

POSITIONS 7-17
"FAN WHEEL CODE"
FAN WHEEL CODE, LEFT ALIGNED WITH TRAILING "X's" AS REQUIRED. EXAMPLE: FAN CODE = AFCF0132, POS. 7-17 = AFCF0132XXX

POSITION 18
"FAN WHEEL" REVISION LEVEL
(SEE NOTE #1)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

DRAWING RELEASE LEVEL: **Under Review**

THIRD ANGLE PROJECTION

MATERIAL
-
-
-

ENGINEERING REQUIREMENTS
Y-002

WEIGHT: -

SURFACE FINISH: -

MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:

1 DEC	2 DEC	3 DEC	ANG
± -	± -	± -	± - °

AUTHORIZATION NUMBER
ECN# 1044731

ENGINEERING	MANUFACTURING
PH 09.14.12	- -

DRAFTER	CHECKER
ETR 09.14.12	ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY)
39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE
PART NO. DEFINN
39MA P/N DEFINITION

SIZE	DRAWING NUMBER	REV
D	39MA40000006 SHEET 30 OF 31	AA

NEXT DRAWING	SCALE	DISTRIBUTION
PER ORDER	N/A	CMX

39MB"_"9 (DIRECT DRIVE PLENUM FAN SLED ASSEMBLY) P/N CONFIGURATION

(*) NON-RELEASED DATA

ALPHA/NUMERIC	N	N	A	A	A	N	A	A/N	A	A/N	A/N	A/N	A/N	A	A/N	A	A	A
POSITION NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
39MB"_"9 DDPF DESCRIPTION (SAMPLE)	3	9	M	B	B	9	B	B	B	X	X	X	X	B	A	B	C	← REFERENCE POSITION 18

POSITIONS 1-4
MODEL NO.
39MB

POSITION 6 - FAN TYPE					
CODE	AF	FC	PF	SLED CODE	APPLICATION
9	N	N	DD-L	N/A	N/A

DD = DIRECT DRIVE PLENUM FAN
L = LAU INDUSTRIES FAN

POSITION 5 - SIZE	
CODE	SIZE
B	03
C	06
D	08
F	10
G	12
H	14
J	17
K	21
L	25
M	30
N	36
P	40
Q	50
R	61
S	72
T	85
V	96
W	110

POSITION 7 - FAN SIZE	
CODE	SIZE
B	105
C	122
D	135
F	150
G	165
H	182
J	200
K	222
L	245
M	270
N	300
P	330
Q	365
R	402

POSITION 8 - OPTIONS					
CODE	INLET GUARD	OUTLET GUARD	PIEZO RING	PIEZO RING TRANSDUCER	SHAFT GROUNDING
B	N	N	N	N	N
C	N	N	N	N	Y
D	N	N	Y	N	N
F	N	N	Y	N	Y
G	N	N	Y	Y	N
H	N	N	Y	Y	Y
*J	N	Y	N	N	N
*K	N	Y	N	N	Y
*L	N	Y	Y	N	N
*M	N	Y	Y	N	Y
*N	N	Y	Y	Y	N
*P	N	Y	Y	Y	Y
Q	Y	N	N	N	N
R	Y	N	N	N	Y
S	Y	N	Y	N	N
T	Y	N	Y	N	Y
V	Y	N	Y	Y	N
W	Y	N	Y	Y	Y
*X	Y	Y	N	N	N
*Y	Y	Y	N	N	Y
*Z	Y	Y	Y	N	N
*1	Y	Y	Y	N	Y
*2	Y	Y	Y	Y	N
*3	Y	Y	Y	Y	Y

POSITION 9 - ROTOR & SEISMIC OPTIONS		
MANUFACTURER BUILD SPECIFICATIONS		
CODE	WHEEL CLASS	ISOLATOR OPTION
B	2	STANDARD
*C	2	SEISMIC

POSITION 10-13
FAN SPEED (RPM)
NOTE: POSITION 10 = 0 IF (RPM) IS 3 DIGITS.

POSITIONS 14-15 - MOTOR SELECTION
SEE LATEST REVISION OF CONTROLLED SPREADSHEET 39MA40000006_MS.XLSX FOR CODES DETAILING REQUIREMENTS FOR MOTOR.

POSITION 16 - FAN ARRAY & HAND / MOTOR		
CODE	ARRAY SIZE	HAND / MOTOR
B	Y=1, Z=1 (1 FAN)	R / F2
C	Y=1, Z=1 (1 FAN)	L / F1
*D	Y=1, Z=2 (2 FANS)	R / F2
*F	Y=1, Z=2 (2 FANS)	L / F1
*G	Y=2, Z=2 (4 FANS)	R / F2
*H	Y=2, Z=2 (4 FANS)	L / F1
*J	Y=2, Z=3 (6 FANS)	R / F2
*K	Y=2, Z=3 (6 FANS)	L / F1

POSITION 17 - FAN BLADES			
CODE	NO. OF BLADES	BLADE SYMMETRY	FAN WIDTH
*B	9	Y	80%
C	9	Y	100%
*D	9	Y	120%
*F	12	Y	80%
*G	12	Y	100%
*H	12	Y	120%
*J	9	N	80%
*K	9	N	100%
*K	9	N	120%

POSITION 18
DIRECT DRIVE PLENUM FAN REVISION LEVEL
(SEE NOTE *1)

REFERENCE DRAWINGS:

39MA40139100 (DIRECT DRIVE PLENUM FANS)

NOTES:

1. A PART NUMBER REVISION CODE IS PROVIDED FOR IN POSITION 18. THIS POSITION WILL BE INDEXED FOR EVERY REVISION TO THIS PART NUMBER THAT AFFECTS THE CONFIGURATION OF THE COMPONENT SPECIFIED. THE SUPPLIER OF THIS PART MUST INTEGRATE THIS CODED VALUE INTO THEIR SYSTEM SUCH THAT ANY CHANGE WILL TRIGGER ACTIONS FOR THE APPROPRIATE CHANGES TO THE FINISHED PRODUCT. **REFERENCE DRAWING (39MA40000010) FOR THE LATEST PART REVISION LEVEL WHERE CONTROLLED.**

DRAWING RELEASE LEVEL: Under Review

THIRD ANGLE PROJECTION

MATERIAL: - - -

ENGINEERING REQUIREMENTS: Y-002

WEIGHT: -

SURFACE FINISH: - | MFG/PURCH: -

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON:
1 DEC ±- | 2 DEC ±- | 3 DEC ±- | ANG ±-°

AUTHORIZATION NUMBER: ECN# 1044731

ENGINEERING: PH 09.14.12 | MANUFACTURING: - -

DRAFTER: ETR 09.14.12 | CHECKER: ETR 09.14.12

CAD MODEL (INTERNAL USE ONLY): 39MA40000006 AA.7

Carrier
A United Technologies Company

THIS DOCUMENT AND THE INFORMATION CONTAINED THEREIN IS PROPRIETARY TO CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART, WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.

TITLE: PART NO. DEFINN
39MA P/N DEFINITION

SIZE: D | DRAWING NUMBER: 39MA40000006 SHEET 31 OF 31 | REV: AA

NEXT DRAWING: PER ORDER | SCALE: N/A | DISTRIBUTION: CMX