


9 Extension connectors

9.1 ST Zio connectors

For all STM32H7 Nucleo-144 boards, [Figure 16](#) shows the signals connected by default to the ST Zio connectors (CN7, CN8, CN9, and CN10), including the support of ARDUINO® Uno V3.

Figure 16. NUCLEOH7 Nucleo-144 board

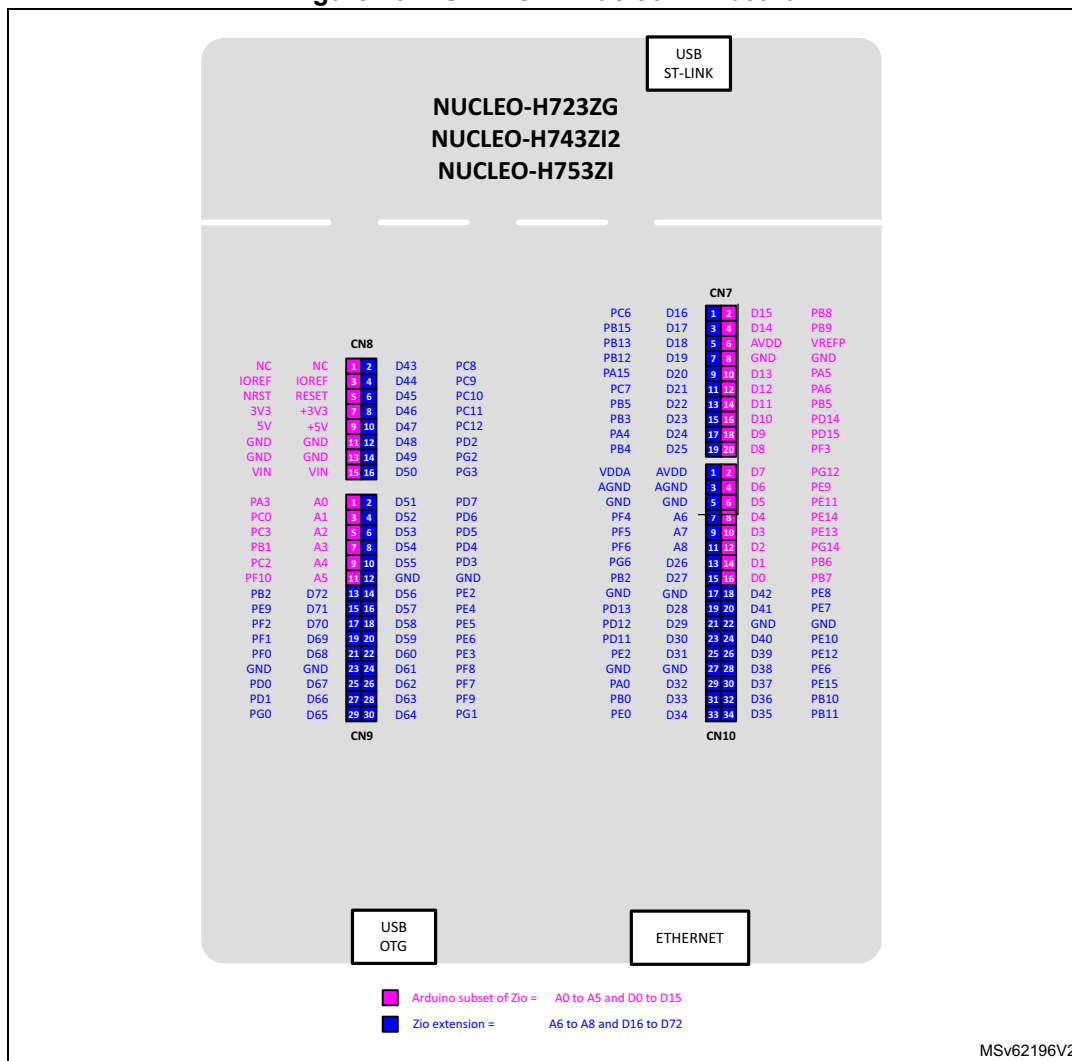

CN7, CN8, CN9, and CN10 are female connectors on the top side and male connectors on the bottom side. They include support for ARDUINO® Uno V3. Most shields designed for ARDUINO® Uno V3 can fit the STM32H7 Nucleo-144 board.

To cope with ARDUINO® Uno V3, apply the following modifications:

- SB55 and SB62 must be ON
- SB53/60/65 must be OFF to connect I²C on A4 (pin 9) and A5 (pin 11 of CN9).