

24V für GRD-V5
Versorgung

24V

GND

NEXT
TRIGGER

RX
TX

TXDEN
PWREN


3V3
GND

GND
3V3
PWREN
TXDEN
TX
RX

RS485 (M8 Connector)
an GRD-V5

RS422 (IDC Connector)
GRD-V4, etc.

RS422 Pinout

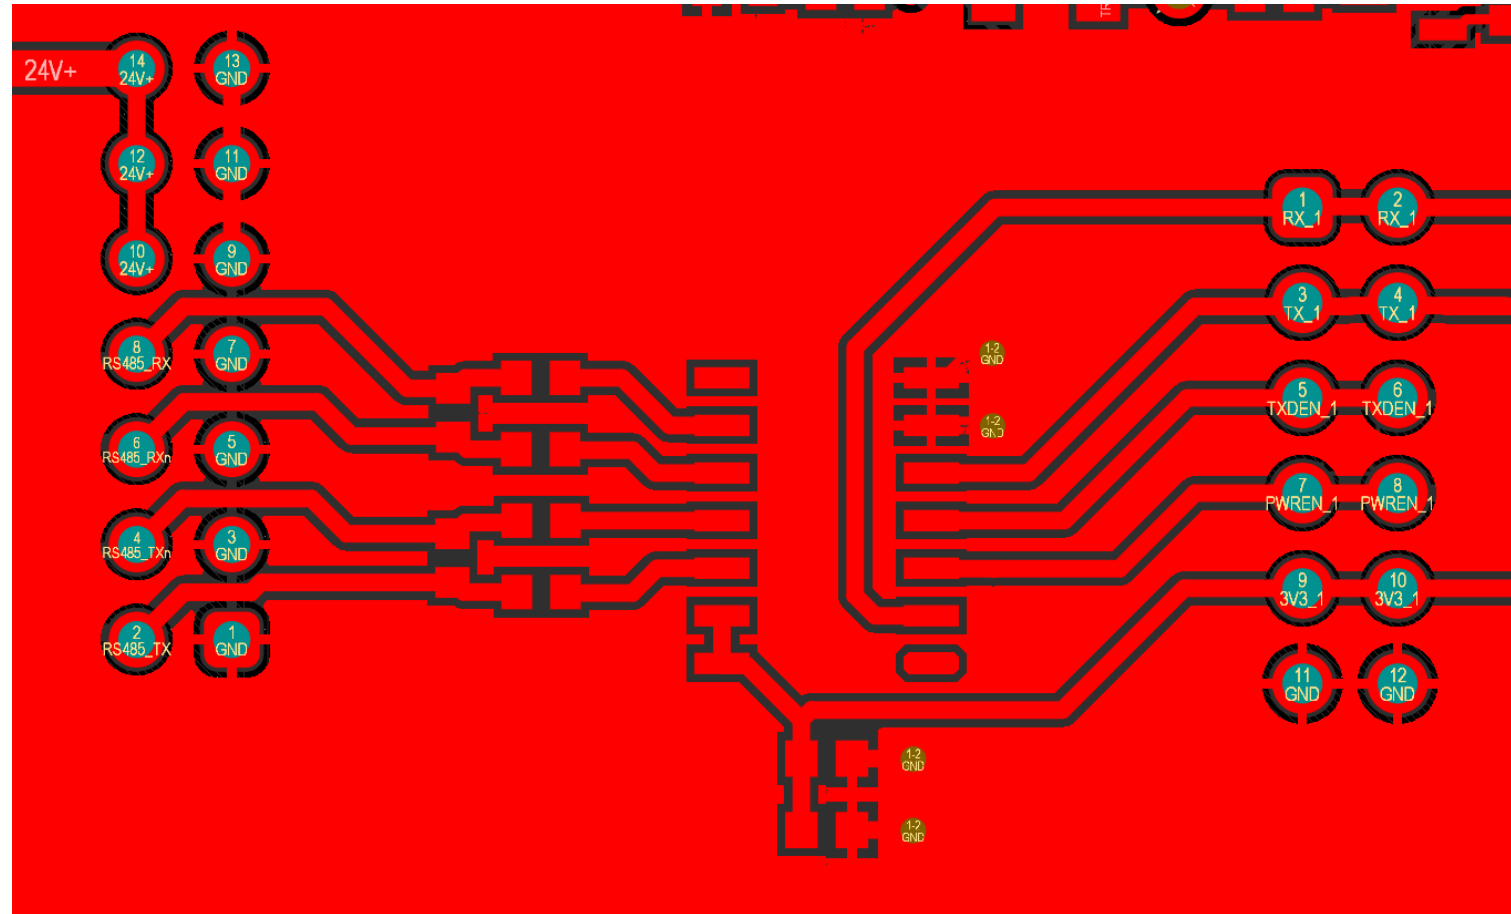

RS485 Pinout

