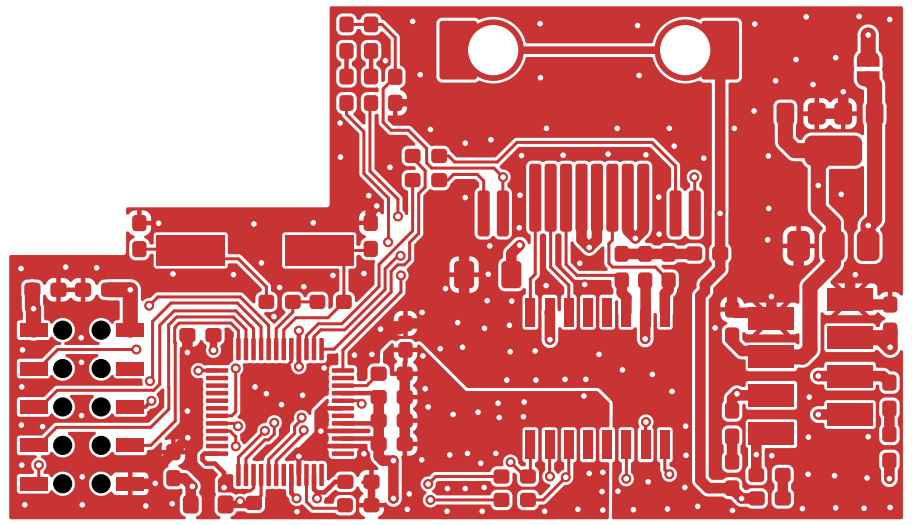

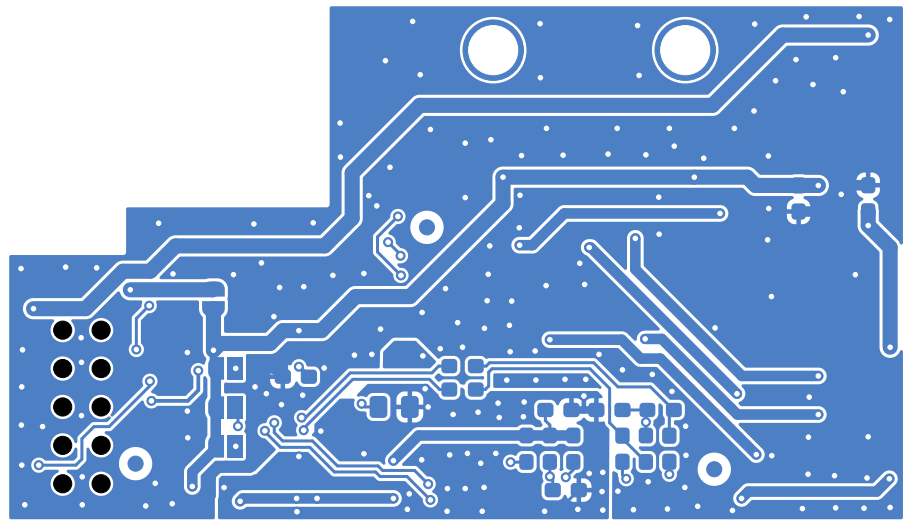

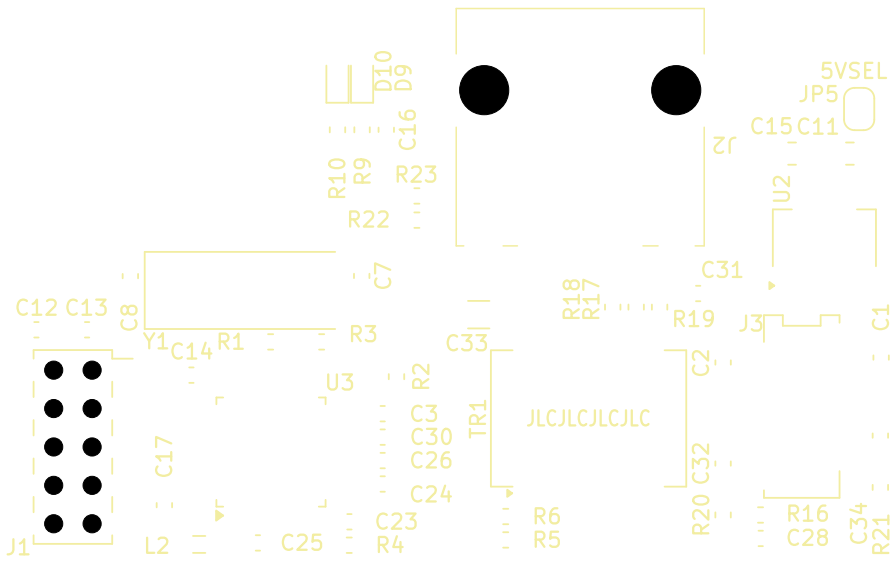
D10
D9
5VSEL
JP5
C16
C15
C11
J2
R10
R9
R23
U2
R22
C7
C31
R18
R17
R19
C12
C13
C8
J3
C1
Y1
R1
R3
C14
C33
C2
R2
U3
C3
C30
TR1
JLCJLCJLCJLC
C26
C17
C32
C24
C23
R6
R20
R16
C34
J1
L2
C25
R4
R5
C28
R21

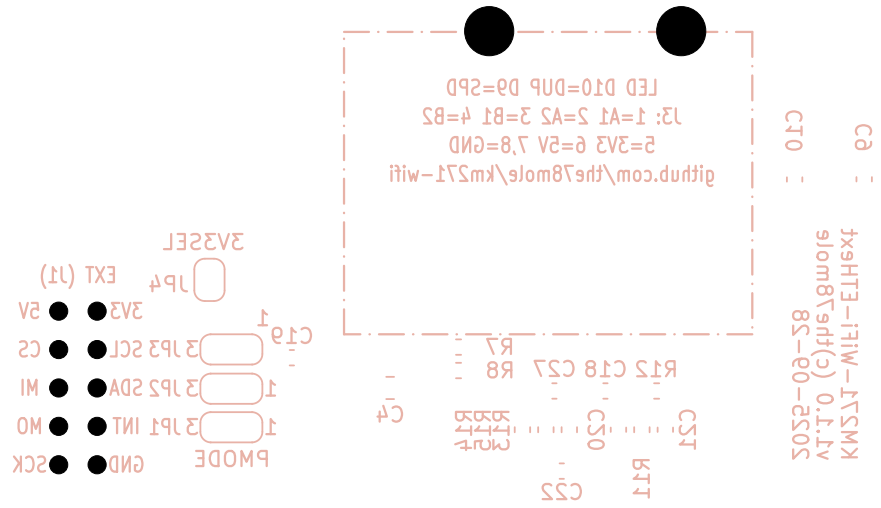
LED D10=DUP D9=SPD
J3: 1=A1 2=A2 3=B1 4=B2
5=3V3 6=5V 7,8=GND
github.com/the78mole/km271-wifi
C10
C9
KM271-WiFi-ETHext
(c)the78mole
v1.1.0
2025-09-28
3V3SEL
JP4
EXT (J1)
5V
3V3
CS
SCL
MI
SDA
MO
INT
SCK
GND
3 JP3
3 JP2
3 JP1
1
PMODE
C19
C4
R7
R8
C27
C18
R12
C20
C21
C22
R11

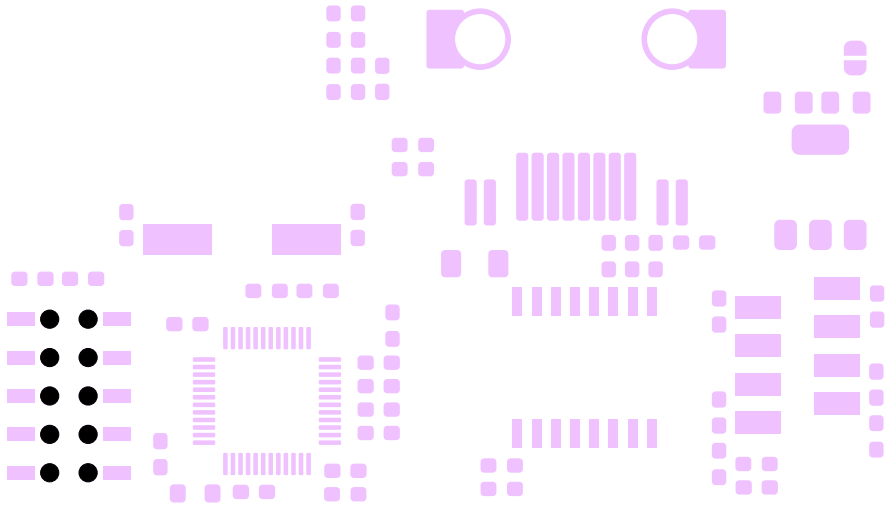

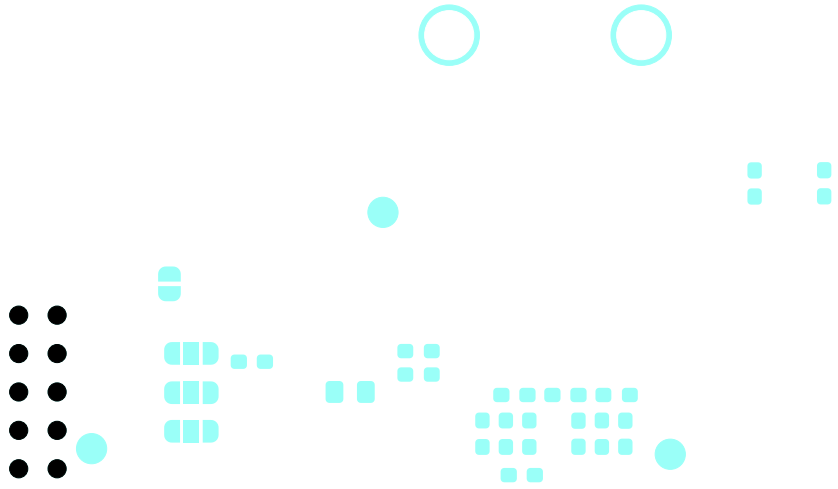

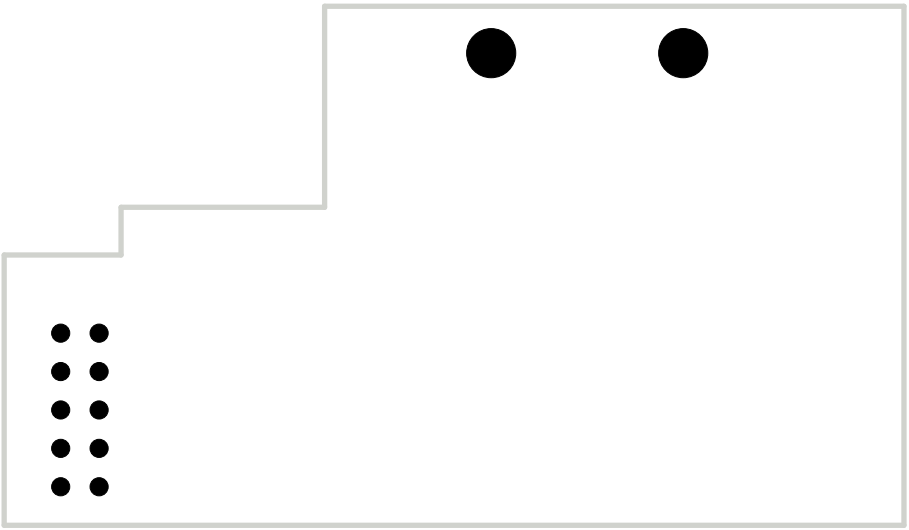

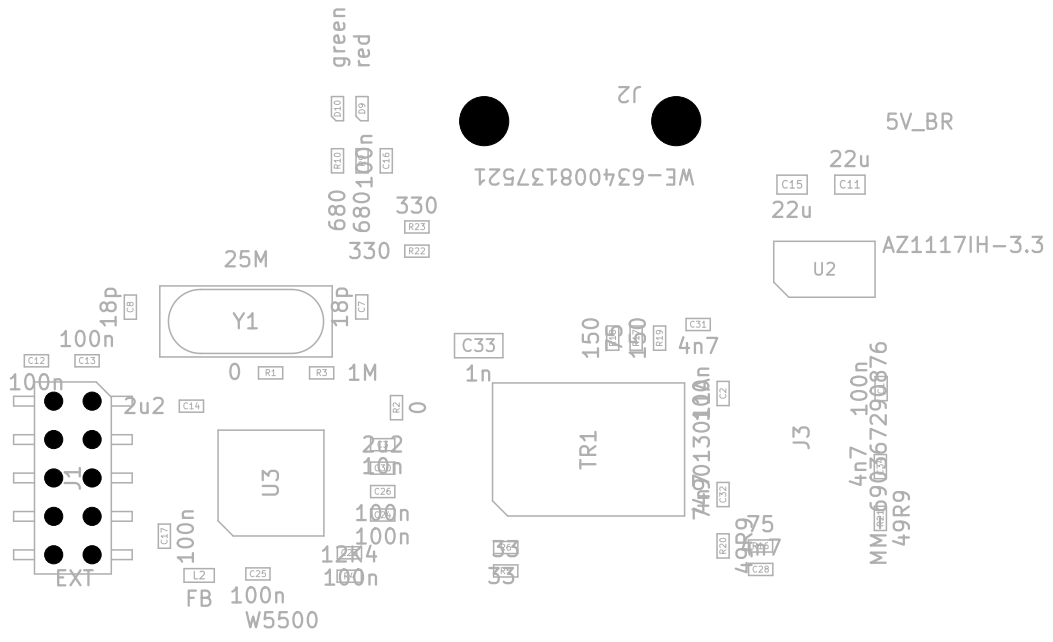

green
red
J2
WE-634008137521
5V_BR
22u
22u
AZ1117IH-3.3
U2
680
680
100n
330
330
25M
Y1
18p
18p
100n
100n
0
1M
2u2
0
C33
1n
150
75
150
4n7
TR1
U3
2u2
10n
100n
100n
12k4
100n
100n
FB
100n
W5500
EXT
33
33
75
4n7
49R9
J3
4n7
100n
49R9

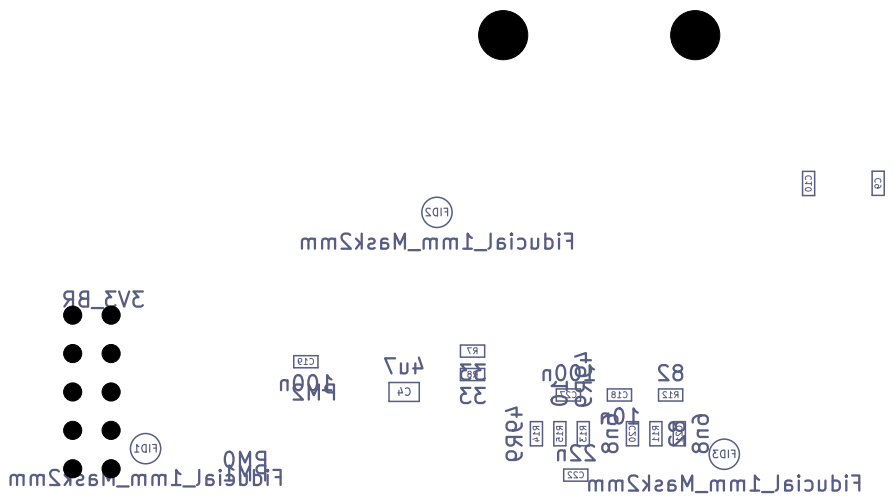
Fiducial_1mm_Mask2mm
3V3_BR
4u7
100n
PM2
33
82
6n8
22n
4R99
PM0
Fiducial_1mm_Mask2mm
Fiducial_1mm_Mask2mm



FAB NOTES KM271–WiFi–ETHext rev v1.1.0
Stackup: 2 layers, FR4 TG135, 1.6 mm +–10 pct, outer copper 1 oz (35 um)
L1 F.Cu signal/GND pour | core 1.5 mm | L2 B.Cu signal/GND pour
Finish: HASL lead–free. Gold fingers: no
Mask green, silk white, vias tented. Min track/space 0.20/0.20 mm, min via 0.3/0.6 mm
Assembly: Standard PCBA, both sides. BOM/CPL: production/bom.csv, production/positions.csv