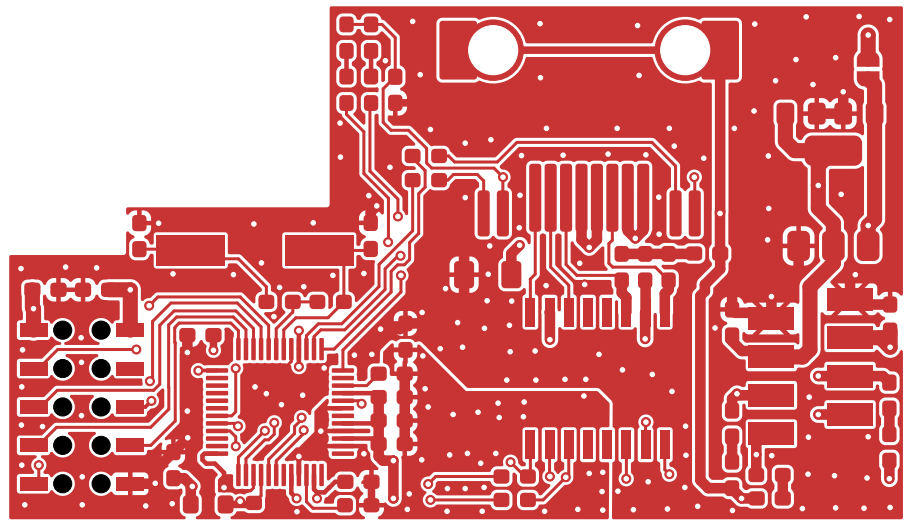

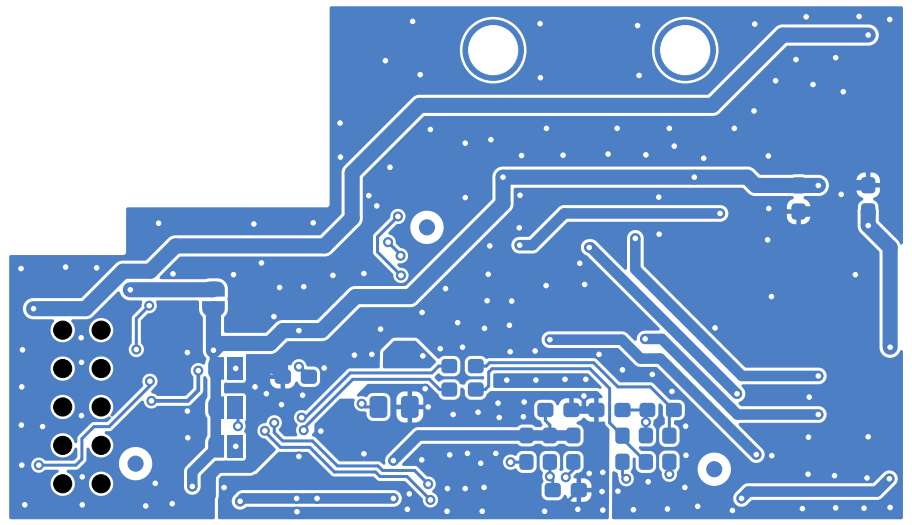

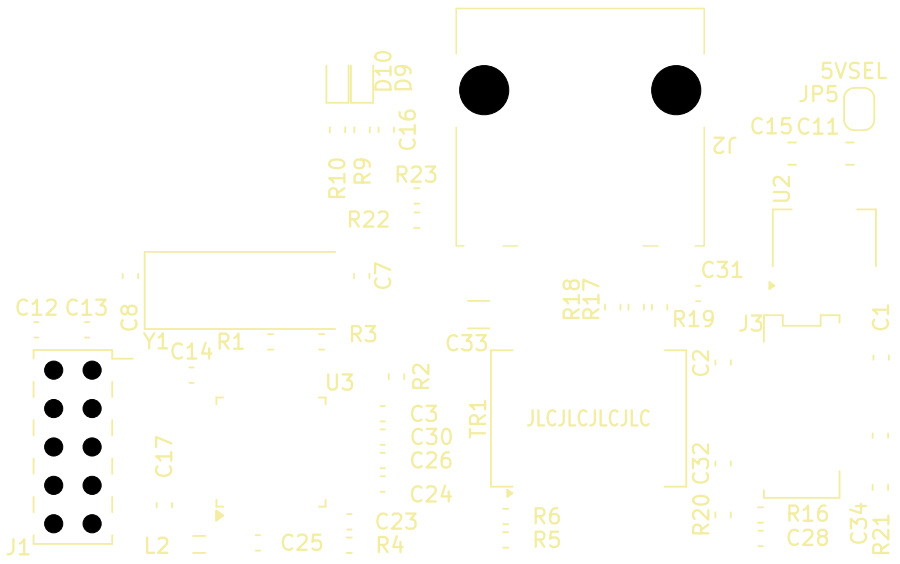
D10
D9
C16
R10
R9
R23
R22
J2
5VSEL
JP5
C15
C11
U2
C7
C31
R18
R17
R19
C8
C12
C13
Y1
C14
R1
R3
C33
J3
C1
U3
R2
C3
C30
C26
C24
C23
TR1
JLCJLCJLCJLC
C2
C32
R20
C17
R6
R5
R16
C28
C34
R21
J1
L2
C25
R4

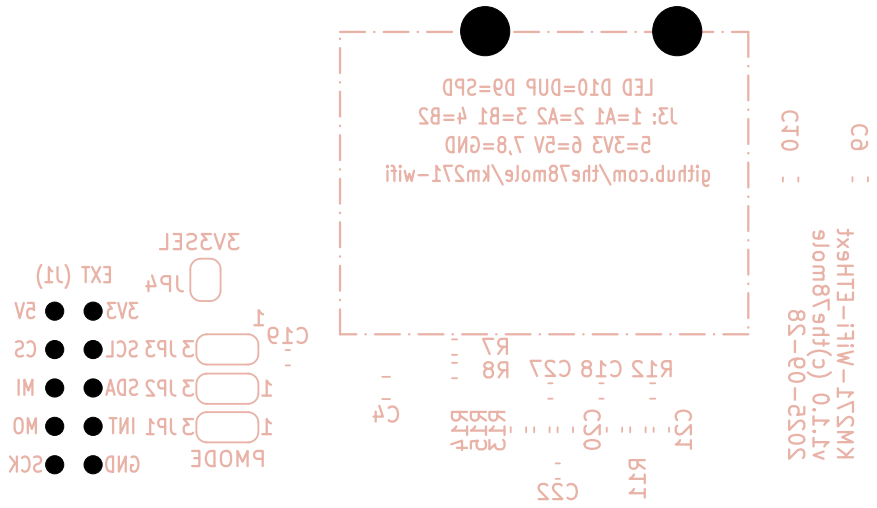
LED D10=DUP D9=SPD
J3: 1=A1 2=A2 3=B1 4=B2
5=3V3 6=5V 7,8=GND
github.com/the78mole/km271-wifi
3V3SEL
JP4
EXT (J1)
5V
3V3
CS
SCL
MI
SDA
MO
INT
SCK
GND
JP3
JP2
JP1
PMODE
C19
C4
R7
R8
C27
C18
R12
C20
C21
C22
R11
C10
C9
KM271-WIFI-Ext
(c) the78mole
v0.1.1
2025-09-28

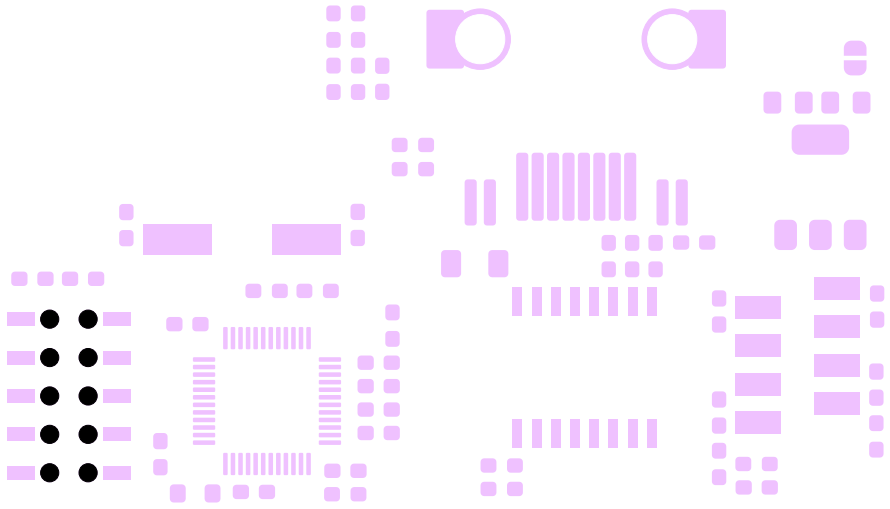



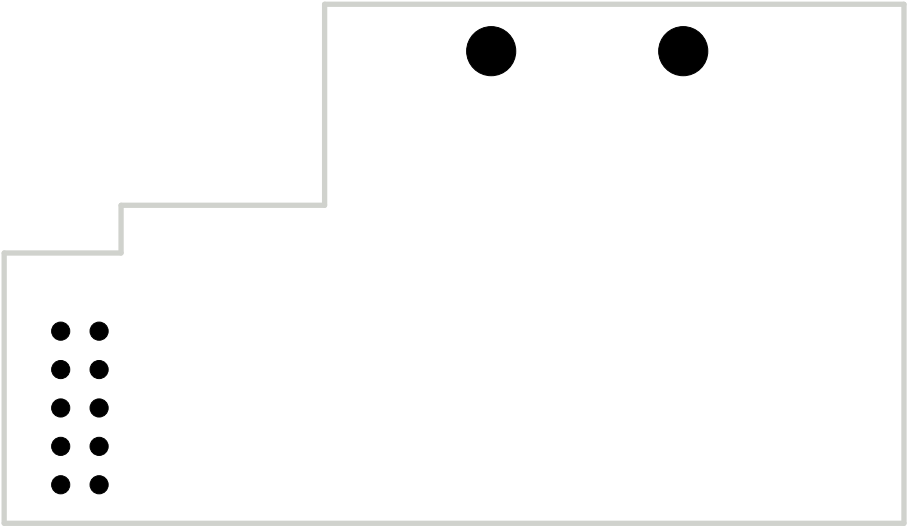

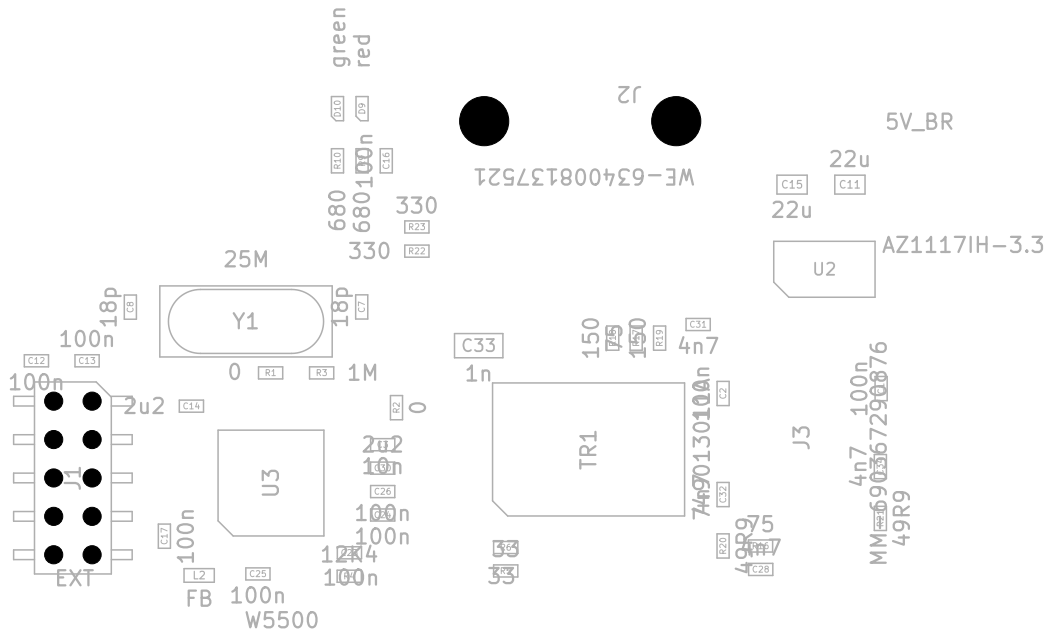
green
red
J2
WE-634008137521
5V_BR
22u
22u
AZ1117IH-3.3
U2
680
680
100n
330
330
25M
Y1
18p
18p
100n
100n
0
1M
2u2
0
C33
1n
TR1
150
75
150
4n7
U3
2u2
10n
100n
100n
12k4
100n
100n
FB
W5500
EXT
33
33
J3
4n7
100n
49R9
75
4n7
MM-6905672900876
49R9

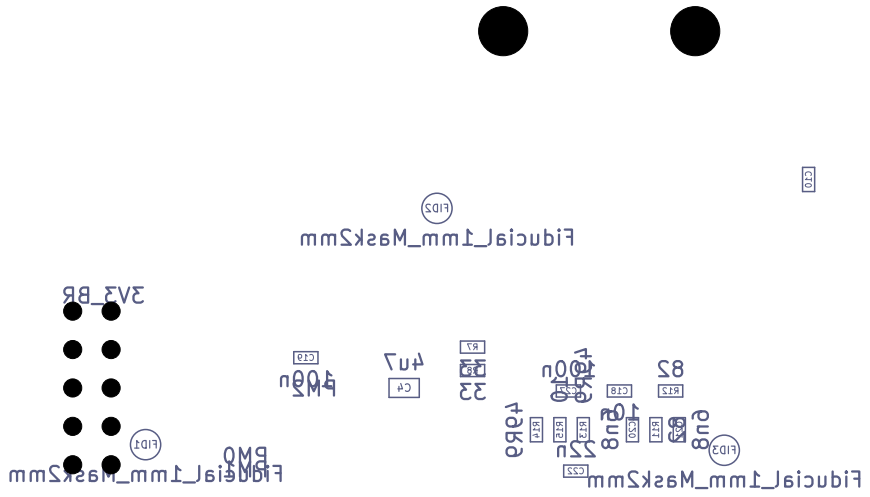
Fiducial_1mm_Mask2mm
3V3_BR
100n
PM2
4u7
100n
82
4R9
22n
10n
6n8
8n8
PM0
PM1
Fiducial_1mm_Mask2mm
Fiducial_1mm_Mask2mm



FAB NOTES KM271–WiFi–ETHext rev v1.1.0
Stackup: 2 layers, FR4 TG135, 1.6 mm +–10 pct, outer copper 1 oz (35 um)
L1 F.Cu signal/GND pour | core 1.5 mm | L2 B.Cu signal/GND pour
Finish: HASL lead–free. Gold fingers: no
Mask green, silk white, vias tented. Min track/space 0.20/0.20 mm, min via 0.3/0.6 mm
Assembly: Standard PCBA, both sides. BOM/CPL: production/bom.csv, production/positions.csv