


Report Biomimicry Challenge

ZHAW Institute for Sustainable Development | Blockweek Bionics 2026

Challenge 1 — Urban Heat Islands

Cooling the City

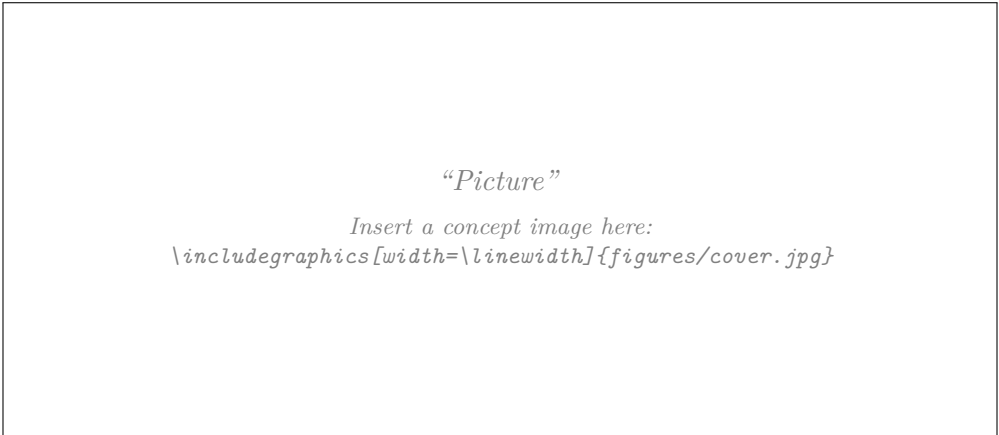

Students	Contribution to the report / (sections)
[TODO: Name 1]	[TODO: e.g. Sections 2, 3.2, engineering calculations]
[TODO: Name 2]	[TODO: e.g. Sections 3.1, 4, biological research]
[TODO: Name 3]	[TODO: e.g. Sections 1, 5, figures and editing]
[TODO: Name 4]	[TODO: e.g. Section 3.3, measurements, appendix]

Comments	[TODO: optional remarks for the instructors]
----------	--

Contents

1	Introduction	2
1.1	Background and relevance	2
1.2	Aim of the report and intended contribution	2
1.3	Structure of the report	2
2	Challenge & Scoping	2
2.1	Problem definition and design question	2
2.2	Context and constraints	3
2.3	State of the art: what the City of Zurich already does	7
2.4	System view and project boundary	8
2.5	Functions and functional diagram	9
2.6	Biologized questions	9
2.7	Performance criteria and KPIs	10
2.8	Relevant Life's Principles	12
3	Bio-Inspired Design Process	12
3.1	Discovering & Abstracting	12
3.1.1	Research path	12
3.1.2	Mechanisms in depth	12
3.1.3	Abstraction into design principles	13
3.2	Creating: Engineering Concept Development	13
3.2.1	Ideation	13
3.2.2	Concept A — [TODO: name]	13
3.2.3	Concept B — [TODO: name]	13
3.2.4	Engineering Canvas and critical questions	14
3.2.5	Engineering check 1: steady-state surface energy balance	14
3.2.6	Engineering check 2: [TODO: title]	14
3.3	Concept Evaluation & Iteration	15
3.3.1	Review and feedback	15
3.3.2	Selection and Final Concept V2	15
3.3.3	Remaining uncertainties	15
4	Sustainability & Life's Principles	15
4.1	Application of Life's Principles to the final concept	15
4.2	Environmental benefits, limitations and trade-offs	16
4.3	Influence of sustainability considerations on the design	16
5	Discussion & Conclusion	16
5.1	Contribution of the biomimicry process	16
5.2	Strengths and weaknesses of the final concept	16
5.3	Assessment against the challenge and the KPIs	16
5.4	Innovative character and limits of the evidence	16
6	References	16
	Appendix A – AI Use Statement	18
	Appendix B – Optional Supporting Material	18

1 Introduction

1.1 Background and relevance

[TODO: 2–3 paragraphs. Suggested content, to be written out and referenced:]

- Urban heat islands (UHI): built-up areas are warmer than their rural surroundings, mainly because impervious surfaces absorb short-wave radiation, store the heat and release it at night, while evapotranspiration and long-wave loss to the sky are reduced (Oke 1982).
- Magnitude in the reference city: Zurich reports an urban heat island of 1 K to 2 K by day and up to 7 K at night in the centre relative to the surrounding area, and sealed sun-exposed surfaces exceeding 60 °C in summer (Stadt Zürich 2021). The night-time load is the larger share, and it is the share that impairs sleep and recovery.
- Health relevance: the city names cerebrovascular, cardiovascular and respiratory illness during heat periods, with older people and small children particularly at risk (Stadt Zürich 2021). Mechanical cooling would raise both electricity demand and the waste heat released into the street canyon, which is why the city advises against air conditioning (Stadt Zürich 2020a, pp. 132–133).
- Policy context: Zurich’s *Fachplanung Hitzeminderung* (Stadt Zürich 2020a) and its implementation agenda (Stadt Zürich 2020c) make retrofit measures on existing building envelopes an actively pursued field of application — and define the incumbent solution this project has to improve on (Section 2.3).

1.2 Aim of the report and intended contribution

[TODO: State the aim in 3–5 sentences, e.g.:] This report documents a biomimicry design process for reducing heat load on the envelope of existing urban buildings. It follows the Biomimicry Design Spiral (Baumeister et al. 2014) through scoping, biological discovery and abstraction, engineering concept development, validation and evaluation. The intended contribution is a technically specified, quantitatively checked envelope concept, together with a transparent account of which biological mechanisms were transferred, which were rejected, and on what evidence.

1.3 Structure of the report

[TODO: One short paragraph describing Sections 2–5.]

2 Challenge & Scoping

2.1 Problem definition and design question

Given challenge (Challenge 1). *Cities are facing increasing heat stress due to climate change. Develop bioinspired strategies to reduce urban heat through building materials, façade design, or urban planning.*

The challenge as given spans three different scales — material, building component and city planning. Treating all three would make the project broader rather than more focused, which the systems view in Section 2.4 is explicitly meant to prevent. We therefore narrow the challenge to the scale at which our team can actually design, calculate and test something within the available time: the *outer surface of an existing building envelope*.

A second reason for this cut is physical. The urban heat island is driven by the surface energy balance: solar radiation absorbed by opaque urban surfaces during the day is stored and re-emitted as sensible heat, while long-wave loss to the sky is reduced by the limited sky

view factor of the street canyon (Oke 1982). The building envelope is one of the largest of these surfaces and, unlike streets or trees, it is directly accessible to a design intervention by a single building owner.

Design question (solution-neutral):

How might we keep the outer envelope of existing urban buildings — and the air and surfaces next to it — cool during summer heat waves, using only passive means and locally available water?

The question was deliberately formulated *after* the context, systems and function analysis, not before. It names no solution (no coating, no greening, no ventilation principle), states the operating context (existing buildings, summer heat waves), and fixes the two hard constraints that follow from Section 2.2 (no auxiliary energy, no potable water). Following the guidance on scoping questions, it sits between “How might we cool the city?” (too broad — no defined intervention point) and “How might we design a reflective roof paint?” (too narrow — presupposes the solution).

2.2 Context and constraints

Reference city: Zurich. All context values, benchmarks and engineering checks in this report refer to the City of Zurich (47.38° N, 8.54° E, approximately 400 m above sea level on the valley floor of the Limmat). Fixing one reference city rather than designing for “a city” is what makes the constraints in Table 2 and the KPI targets in Table 6 checkable instead of generic. Zurich was chosen for four reasons:

1. The city has an adopted municipal heat-mitigation strategy, the *Fachplanung Hitze-minderung* (Stadt Zürich 2020a), with an implementation agenda (Stadt Zürich 2020c), a guidance leaflet for building owners (Stadt Zürich 2021) and three thematic maps (Stadt Zürich 2020b). The project therefore has a real client, a documented baseline and published target values instead of invented ones. Section 2.3 shows what this means for our design space.
2. The city publishes an open climate analysis and open geodata (Stadt Zürich n.d.), so the reference site can be selected from measured heat-load data instead of intuition.
3. MeteoSwiss operates long-term stations in and around the city (MeteoSwiss n.d.), which supplies the boundary conditions (G , T_a , wind speed, cloud cover) for the energy balance in Section 3.2.
4. Its building stock and morphology are representative of the Swiss Mittelland: dense perimeter-block development, narrow street canyons, a high sealed fraction and a large share of buildings predating modern thermal standards. Results can therefore be transferred to comparable Swiss cities.

Reference site and users. We adopt the city’s own model area *Modellierungsgebiet 03 — Geschlossene Randbebauung* (closed perimeter block) as the reference site (Stadt Zürich 2020a, pp. 148–151). It consists of two outward-closed blocks of five storeys plus a roof structure enclosing private courtyards, in a dense district close to the centre; the street space is sealed from façade to façade, parking runs along the street and only isolated trees provide shade. The city’s own climatic assessment of this structural type is that the reduced air exchange and the lack of cold-air supply make it overheat comparatively quickly.

Choosing this site rather than an arbitrary building has a concrete methodical advantage: the Fachplanung already publishes modelled baseline and climate-optimised results for exactly this area, so our concept can be compared against a documented reference instead of against our own assumptions. **[TODO: Record the address, façade orientations, roof area and year of construction of the specific building you pick inside this area.]**

The system users are the residents of the upper floors, who carry the strongest heat load and usually have no mechanical cooling; the pedestrians in the street canyon, who receive radiation from the façade at eye level; and the building owner, who decides on and pays for the retrofit.

When. The design must perform in two distinct operating windows, which the systems view made explicit:

- **Day window (approx. 11:00–18:00, clear sky):** clear-sky global irradiance on a horizontal surface of the order of 900 W/m^2 to 950 W/m^2 around solar noon in midsummer, with air temperatures reaching roughly 33°C to 36°C during a heat wave. Dominant problem: absorbed short-wave radiation. A sealed, sun-exposed surface in the city can exceed 60°C in summer and drive up the air temperature in its immediate surroundings (Stadt Zürich 2021). **[TODO: replace the irradiance and air-temperature figures with measured values from MeteoSwiss for the Zurich stations — the irradiance above is a clear-sky estimate, not a measurement]**
- **Night window (approx. 22:00–06:00):** the stored heat is released again, producing tropical nights ($T_{\min} \geq 20^\circ\text{C}$). Dominant problem: the *delayed* release of stored heat, and a reduced sky view factor in the street canyon that limits radiative loss. **For Zurich the night is the larger half of the problem:** the city states an urban heat island effect of 1 K to 2 K by day but up to 7 K at night in the centre compared with the surrounding area (Stadt Zürich 2021). A concept that only performs during the day therefore addresses the smaller half. **[TODO: report the number of hot days ($T_{\max} \geq 30^\circ\text{C}$) and tropical nights per year for Zurich, and state which station and which reference period the figures come from — the difference between the hill station and an inner-city station is itself a result worth reporting]**

Where on the envelope? A consequence of Zurich’s latitude. Fixing the reference city also fixes the solar geometry, and that geometry already narrows the design space before any biology is considered. At 47.38°N the solar altitude at noon on 21 June is

$$h = 90^\circ - 47.38^\circ + 23.44^\circ \approx 66^\circ. \quad (1)$$

The direct beam therefore strikes a horizontal roof at an incidence factor of $\sin h \approx 0.91$, but a vertical south-facing façade at only $\cos h \approx 0.41$. In midsummer — exactly when the concept has to work — the flat roof receives well over twice the direct irradiance of a south façade at noon, and the roof also has a much larger sky view factor for night-time long-wave emission (F2). **[TODO: Confirm with daily irradiation totals per surface orientation from the national roof-irradiance dataset (Swiss Federal Office of Energy n.d.); then decide and justify whether the concept targets the roof, the façade or both. Note that east and west façades peak in the morning and late afternoon rather than at noon, so a façade concept has a different load profile, not simply a smaller one.]**

Data sources for the reference case. Table 1 lists the open datasets used to characterise the reference city and, later, to validate the concept. Using measured local data rather than generic literature values is what turns “be locally attuned and responsive” (Section 2.8) from a slogan into a design input.

Constraints. Table 2 lists the constraints the concept has to satisfy. They are separated into hard constraints (a violation disqualifies a concept) and soft constraints (they influence the evaluation in Section 3.3).

Table 1: Open data sources for the Zurich reference case. All are freely accessible; access dates belong in the reference list.

Source	What it provides	Used for
Fachplanung Hitzeminderung and its thematic maps (Stadt Zürich 2020a; Stadt Zürich 2020b)	Baseline albedo values, modelled effectiveness per measure, city structure types, areas needing action, cold-air corridors	Reference case, incumbent benchmark (Table 3), site selection
MeteoSwiss station data (MeteoSwiss n.d.)	Air temperature, global radiation, wind speed, humidity; long homogeneous series for Zurich stations	Boundary conditions for Eq. (2); definition of the design heat wave
City of Zurich heat-mitigation plan (Stadt Zürich 2020a)	Municipal strategy, heat-load maps, target areas	Justification of the challenge and of the site selection
City of Zurich open geodata (Stadt Zürich n.d.)	Building footprints, roof areas, tree cadastre, climate-analysis layers	Selecting the reference site; estimating the addressable roof area
National roof irradiance dataset (Swiss Federal Office of Energy n.d.)	Irradiation per roof surface, orientation, tilt and usable area	Irradiance per orientation; roof-versus-façade decision
Landsat 8/9 thermal data (U.S. Geological Survey n.d.)	Land surface temperature at approximately 100 m resolution	Independent check that the chosen site really is a heat hotspot; before / after comparison of surface temperature at district scale

Table 2: Context conditions and constraints.

Type	Class	Constraint
Energy	hard	No auxiliary electrical energy for the cooling function itself (pumps, fans, chillers). Sensors for validation are excluded from this constraint.
Water	hard	No potable water. Only rainwater harvested on site or atmospheric moisture may be used.
Existing building	hard	Retrofit onto an existing envelope. The load-bearing structure, floor plan and window openings are not redesigned.
Climate	hard	Must survive the Swiss annual cycle: frost down to about -10°C , freeze–thaw cycles, driving rain, UV exposure. A summer-only solution is not acceptable.
Winter	hard	Must not increase the heating demand appreciably (a high solar reflectance also reduces useful winter solar gains — this trade-off must be quantified, not ignored).
Glare	hard	No specular glare towards streets, neighbouring flats or traffic. The city names glare and the resulting safety concerns as the main objection to bright envelopes (Stadt Zürich 2020a, p. 128). This favours diffuse, structural whiteness over a mirror finish.
Regulatory	soft	Fire regulations for façade build-ups; heritage protection may restrict visible changes on street-facing façades (Stadt Zürich 2020a, p. 128).
Solar energy	soft	Must not unnecessarily compromise façade- or roof-integrated photovoltaics; the city notes that bright envelopes reduce PV yield (Stadt Zürich 2020a, p. 128). State explicitly which envelope areas the concept claims.
Structural	soft	Limited additional dead load and build-up thickness on an existing façade.
Maintenance	soft	Soiling, algae growth and weathering degrade the optical function. Soiling and the resulting cleaning cost are named by the city as a specific weakness of high-albedo envelopes (Stadt Zürich 2020a, p. 128); the concept should keep working with little maintenance over ≥ 20 years.
Economic	soft	The city expects higher construction and refurbishment cost for high-albedo envelopes (Stadt Zürich 2020a, p. 128). Target: cost per square metre in the range of a normal façade or roof refurbishment. [TODO: find a benchmark figure and cite it]

2.3 State of the art: what the City of Zurich already does

Scoping is incomplete without knowing what the client already does. The Fachplanung Hitzeminderung defines thirteen courses of action (*Handlungsansätze*, HA 01–HA 13). Four of them act on the building envelope and therefore fall inside our project boundary: HA 09 green roofs, HA 10 green façades, HA 11 high-albedo façade and roof materials, and HA 12 shading of the outdoor space close to the building (Stadt Zürich 2020a, pp. 120–131). HA 11 is the direct incumbent of our design question, and the city already recommends it to building owners (Stadt Zürich 2021).

Table 3: Modelled effectiveness of the incumbent measures, from the Fachplanung Hitzeminderung. Day values are the physiologically equivalent temperature (PET) at 14:00, 2 m above ground; night values are air temperature. “Range” is the distance over which the effect is measurable.

Measure	Median	Max.	Range	Source
HA 11 bright façade — day (PET)	−1.0 K	−1.8 K	2 m to 3 m	(Stadt Zürich 2020a, Tab. 11, 128)
HA 11 bright façade — night	−0.1 K	−0.2 K	1 m to 2 m	
HA 11 bright roof — day (PET)	−1.2 K	−2.1 K	2 m to 4 m	
HA 11 bright roof — night	−0.1 K	−0.3 K	1 m to 2 m	
HA 06 high-albedo ground surface instead of asphalt — day (PET)	−1.5 K	−2.8 K	2 m to 4 m	(Stadt Zürich 2020a, Tab. 5, 114)
HA 06 — night	−0.2 K	−0.5 K	2 m to 3 m	

Baseline values this fixes for us. The city’s model uses a solar reflectance of 0.2 for asphalt and 0.3 for un-greened façades, and classifies ≤ 0.30 as low and ≥ 0.80 as high albedo. Reported material values are slate 0.1, roof tiles 0.1–0.35, natural stone 0.2–0.35 and a white façade 0.5–0.9 (Stadt Zürich 2020a, pp. 114, 128–129). Our reference case and the target of KPI 1 in Table 6 are taken directly from these figures, so the comparison is made on the client’s own terms rather than on ours.

Constraints the city already identified for HA 11. Glare and the resulting safety concerns; reduced yield of façade-integrated photovoltaics; higher construction and refurbishment cost; susceptibility to soiling and the cleaning cost that follows; and heritage protection requirements (Stadt Zürich 2020a, p. 128). These are carried into Table 2 as sourced constraints.

The gap — and the design opportunity. Table 3 contains the central finding for this project. The incumbent measure works during the day but is close to ineffective at night: −0.1 K median air temperature, against an urban heat island that reaches 7 K at night. A bright surface reduces what is absorbed, but it provides no additional path for releasing heat that has already been stored in the construction, and it does nothing that would help once the sun is down.

This defines the space in which a bio-inspired concept can be more than a repetition of existing practice. It must do at least one of the following:

1. beat HA 11 on its own daytime metric (PET at pedestrian level), or
2. deliver a night-time effect that HA 11 does not — which is what the biologized questions on emitting to the night sky (F2) and on storing, buffering and metering water (F4, F6–F8) are aimed at, or

3. resolve one of the constraints the city itself names for HA 11 — above all glare and soiling, which are exactly the points where the biological models are strong: structural rather than specular whiteness, and self-cleaning surfaces.

[**TODO: Note for the discussion in Section 5: the running text on p. 128 of the Fachplanung quotes a maximum PET reduction of 2.3 K for a south-west facing façade, while Tab. 11 on the same page gives 1.8 K. Check the source, decide which value you use, and say so. Spotting this is worth more than quietly copying one of the two.**]

2.4 System view and project boundary

Figure 1 places the challenge in its system hierarchy. The purpose of the hierarchy is to prevent tunnel vision; the purpose of the boundary drawn afterwards is to prevent scope explosion.

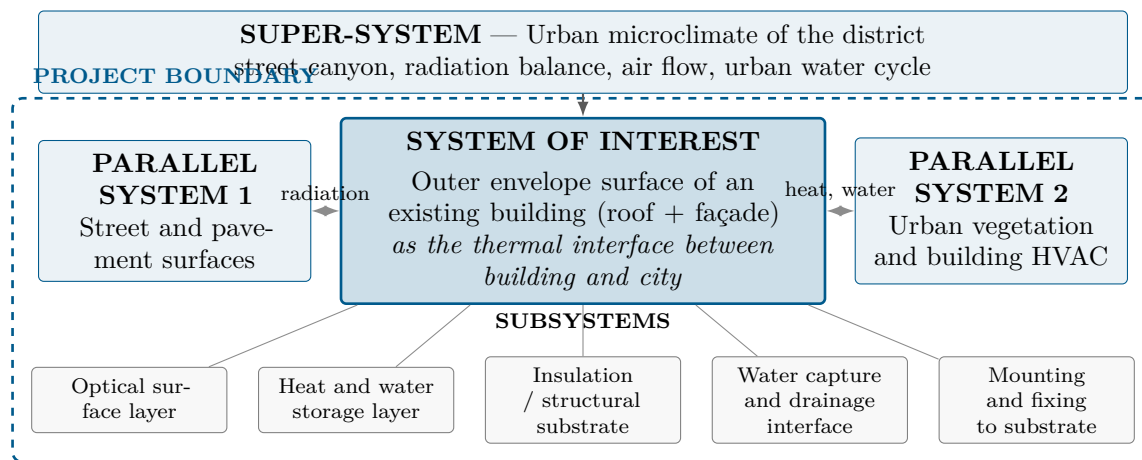


Figure 1: System view for Challenge 1. The dashed line is the project boundary: everything inside it is designed and analysed by the team.

Table 4: Project boundary: what is deliberately in and out of the project.

IN the project	OUT of the project
Passive control of the short-wave and long-wave radiation balance of the envelope surface	Redesign of the building itself: structure, floor plan, windows, insulation thickness
Heat and water storage behaviour of the outermost build-up, including the night-time release	Active building services: chillers, mechanical ventilation, heat pumps, indoor comfort control
Capture and controlled release of rainwater within the envelope build-up	Street trees, parks, urban greening at district level, urban planning
Interface with the street canyon (radiation towards pedestrians) and with the night sky	Municipal water supply and treatment, sewage system
Mounting concept on an existing substrate and durability of the optical function	Permitting, heritage approval, business model, full life cycle assessment

What the systems view added. *The systems view changed our project scope because it showed that the envelope does not only exchange heat with the building interior, but also with two systems we had not considered: the pedestrian level of the street canyon (the façade radiates onto people) and the night sky (the only heat sink that is available without energy input). This added one function (emit long-wave radiation to the sky), one constraint (the concept must also*

perform at night, not just at the daytime peak) and one KPI (net radiative cooling power at night, KPI 5 in Table 6). The comparison with the parallel system “urban vegetation” also sharpened a constraint: vegetation achieves its cooling through evapotranspiration and therefore needs a continuous water supply, which in a heat wave is exactly the resource that is scarce. This is the origin of the hard constraint “no potable water”.

2.5 Functions and functional diagram

Following the scoping method, the functions are formulated as solution-neutral verbs and answer the question “what must the design *do*?”, not “what do we want to build?”. The verbs are aligned with the Biomimicry Taxonomy so that they can be used directly as search terms in AskNature (Biomimicry Institute [n.d.](#)).

Table 5: Function list. Main function, sub-functions and supporting functions.

ID	Function (verb)	Explanation / taxonomy link
<i>Main function</i>		
F0	Regulate heat gain of a surface	Modify / regulate physical state: manage temperature
<i>Sub-functions — energy path</i>		
F1	Reflect short-wave radiation	Prevent absorption of solar energy in the first place
F2	Emit long-wave radiation	Release heat to the sky, in particular in the atmospheric window
F3	Transfer heat to ambient air	Convective dissipation at the surface
F4	Store thermal energy temporarily	Buffer and shift the daily peak
F5	Shade a surface	Reduce the irradiated area, e.g. through surface geometry
<i>Sub-functions — water path</i>		
F6	Capture water	Collect rain or atmospheric moisture
F7	Retain water	Store it until it is needed during the heat peak
F8	Release water in a controlled way	Meter evaporation instead of losing the reserve at once
<i>Supporting functions</i>		
F9	Keep a surface clean	Maintain the optical function against soiling and algae
F10	Resist degradation / self-repair	Withstand UV, frost and weathering over the service life
F11	Attach to a substrate	Fix the build-up to an existing wall or roof

Figure 2 shows the functional diagram. It is kept solution-neutral: it contains only functions and the energy and material flows between them, no components and no material choices.

2.6 Biologized questions

The functions are translated into questions to nature, which form the search strategy for Section 3.1:

- How does nature reflect intense solar radiation without pigments that bleach — and how does it stay white or bright over a lifetime?
- How does nature release excess heat to the night sky?
- How does nature dissipate heat where water is scarce?

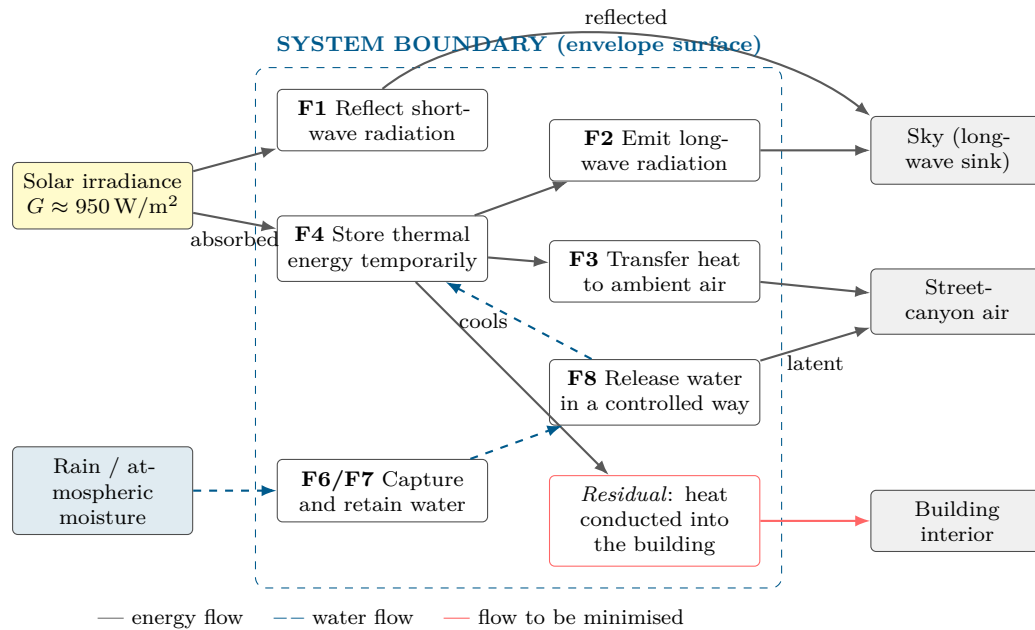


Figure 2: Solution-neutral functional diagram of the envelope surface. Supporting functions F9–F11 (keep clean, resist degradation, attach) act on all functions inside the boundary and are omitted here for readability.

- How does nature capture, store and meter out small amounts of water?
- How does nature buffer a daily temperature extreme instead of resisting it?
- How does nature keep a functional surface clean without cleaning it?
- How does nature repair a surface that is damaged by weathering?

2.7 Performance criteria and KPIs

The KPIs are derived from the functions, interfaces and constraints identified above — not invented independently of them. They are used twice: to guide the engineering checks in Section 3.2 and to compare the concepts in Section 3.3.

One quantity deliberately not a KPI. The heat conducted through the envelope into the building is reported in Section 3.2 as a secondary result, because it follows from the same energy balance at no extra cost and matters to the building owner. It is not a selection KPI: indoor comfort and building services lie outside the project boundary (Table 4), and mixing an out-of-boundary benefit into the concept comparison would distort it.

Note on the targets. The target values above are the team’s *aspirational* benchmarks set during scoping. They are hypotheses, not results. Every one of them is checked in Section 3.2 and either confirmed, revised or explicitly declared unverified. **[TODO: before hand-in: verify each cited benchmark value against the primary source — the rubric penalises unchecked claims]**

Important distinction. KPI 3 measures a *surface* temperature, not the air temperature of the city. A high-reflectance surface can easily be 20 K cooler than a dark one, while the effect on the air temperature of the district is smaller by roughly two orders of magnitude (Santamouris 2014; Akbari et al. 2009). Conflating the two is the most common error in urban-heat-island projects

Table 6: Performance criteria. Function $\rightarrow$ KPI $\rightarrow$ unit $\rightarrow$ target. Reference case: an existing Zurich façade or roof with a solar reflectance of about 0.3, the value the city uses for un-greened façades (Stadt Zürich 2020a, p. 114).

#	Function	KPI	Unit	Target / benchmark
1	F1 Reflect short-wave radiation	Solar reflectance α_{sol} (300–2500 nm)	–	≥ 0.80 , the threshold the city defines for “high albedo” (Stadt Zürich 2020a, p. 128). Baseline 0.3. Ultra-white laboratory paints reach ≈ 0.98 (Li et al. 2021).
2	F2 Emit long-wave radiation	Thermal emittance ε in the atmospheric window (8–13 μm)	–	≥ 0.90 . Required for sub-ambient radiative cooling (Raman et al. 2014). Not addressed by the incumbent measure.
3	F0 Regulate heat gain	Peak surface temperature reduction ΔT_s vs. reference, clear sky, 14:00	K	≥ 15 K. [TODO: confirm by calculation or measurement before claiming it]
4	F0 (day, people)	PET reduction at 2 m above ground, 14:00	K	Beat the incumbent: HA 11 achieves -1.0 K (façade) and -1.2 K (roof) median (Stadt Zürich 2020a, Tab. 11). This is the metric the client actually uses.
5	F2, F4 (night)	Net radiative cooling power at 02:00, clear sky; and night air temperature effect	W/m^2 ; K	$\geq 40 \text{ W}/\text{m}^2$ (Raman et al. 2014; Zhai et al. 2017), and a night effect better than the -0.1 K of HA 11 (Stadt Zürich 2020a, Tab. 11). The decisive criterion of this project.
6	F6–F8 Water path	Potable water consumption	$\text{L}/(\text{m}^2 \text{ d})$	$= 0$ (hard constraint). Harvested rainwater reported separately.
7	F9/F10 Durability	Retention of α_{sol} after soiling / weathering	% of initial	≥ 90 % after three years. Soiling is the weakness the city names for high-albedo envelopes (Stadt Zürich 2020a, p. 128); aged cool roofs commonly lose a significant fraction of their initial reflectance (Santamouris 2014).

and would invalidate our evaluation, so both quantities are reported separately throughout this report.

2.8 Relevant Life's Principles

The Life's Principles that are most relevant to this specific challenge, and that are used again as a sustainability benchmark in Section 4:

- **Use low energy processes** — the entire cooling function must be passive; this is the hard energy constraint.
- **Be locally attuned and responsive** — the concept must respond to the local diurnal cycle and the local water availability, not to an average annual climate.
- **Be resource efficient (material and energy)** — fit form to function, low added mass per square metre (see also KPI 7).
- **Adapt to changing conditions** — performance is needed in a summer heat wave, but the same surface must not harm the winter energy balance.
- **Maintain integrity through self-renewal** — the optical function degrades through soiling; a self-cleaning or self-renewing surface preserves the KPI over the service life.
- **Use life-friendly chemistry** — relevant when selecting pigments, binders and biocides for the outer layer.

Quality check (slide 29).

- ☐ Is our system of interest clearly defined? — Yes: the outer envelope surface of an existing building.
- ☐ Is our project boundary manageable? — Yes, see Table 4.
- ☐ Are our functions solution-neutral? — Yes, verbs only; no components named in Table 5 or Figure 2.
- ☐ Did the systems view reveal additional functions or constraints? — Yes: F2 (emit to the sky), the night operating window, and the water-scarcity constraint.
- ☐ Are our most important functions measurable? — Yes, KPIs 1–7.
- ☐ Is the “How might we...?” question open to different solutions? — Yes: radiative, evaporative and geometric strategies all remain possible.

3 Bio-Inspired Design Process

[TODO: One short paragraph: how the team organised the search and the design path, so the reasoning chain from Section 2 to Section 3.3 is visible.]

3.1 Discovering & Abstracting

3.1.1 Research path

[TODO: Describe how you searched: AskNature functions used, search terms, databases, which biologized question from Section 2.6 led to which model.]

3.1.2 Mechanisms in depth

[TODO: For the 2–3 selected models: explain the mechanism properly — geometry, length scales, physics, and the evidence. Add a sketch. This is worth 20 % of the grade and descriptive text alone is not enough.]

Table 7: Biological models found, and the selection / de-selection decision.

Organism / model	Function	Mechanism (short)	Selected?
Saharan silver ant <i>Cataglyphis bombycina</i>	F1, F2	Triangular hairs scatter visible and near-infrared light and simultaneously enhance emissivity in the mid-infrared (Shi et al. 2015)	[TODO: yes/no + why]
White beetle <i>Cyphochilus</i>	F1	Brilliant whiteness from a disordered chitin network only a few micrometres thick, without pigment (Vukusic et al. 2007)	[TODO: yes/no + why]
African elephant skin	F6–F8	Network of micrometre-scale cracks retains water and extends evaporative cooling (Martins et al. 2018)	[TODO: yes/no + why]
Desert shrub <i>Encelia farinosa</i>	F1, F5	Dense leaf pubescence raises reflectance and is adjusted seasonally (Ehleringer and Mooney 1978)	[TODO: yes/no + why]
Termite mound	F3	Classic biomimicry reference, but the “chimney air-conditioning” account is contested; measurements support wind-driven transient gas exchange rather than a thermosiphon (Turner and Soar 2008)	[TODO: recommended: DE-SELECT with this justification]
[TODO: further models]			

3.1.3 Abstraction into design principles

[TODO: Fill in. Keep the three columns strictly separate.]

Table 8: From biological observation to transferable design principle.

Biological observation	Abstracted principle	Possible technical interpretation
[TODO: what was observed]	[TODO: the principle, free of the organism]	[TODO: how it could be built — not yet a decision]

3.2 Creating: Engineering Concept Development

3.2.1 Ideation

[TODO: Document the method (Crazy 8s / morphological matrix). Include a photo or scan of the sheets. Show at least three initial combinations.]

3.2.2 Concept A — [TODO: name]

[TODO: Annotated drawing + description: components, functional chain, flows, candidate materials, key technical parameters.]

3.2.3 Concept B — [TODO: name]

[TODO: Must be technically DISTINCT from A — a different physical principle, not a variant. E.g. a radiative (dry) concept vs. an evaporative or geometric

(self-shading) concept.]

3.2.4 Engineering Canvas and critical questions

[TODO: Insert the Engineering Canvas. Then derive 2–3 critical engineering questions of the form: “What must be true for the concept to work?”]

1. [TODO: Critical question 1]
2. [TODO: Critical question 2]
3. [TODO: Critical question 3]

3.2.5 Engineering check 1: steady-state surface energy balance

[TODO: This check is prepared because it is the most direct way to test KPI 1 and KPI 3. Fill in your own numbers, state every assumption, and keep the units.]

For an opaque surface in steady state, the energy balance per unit area is

$$(1 - \alpha_{\text{sol}}) G + \varepsilon L_{\downarrow} - \varepsilon \sigma T_s^4 - h_c (T_s - T_a) - q_{\text{cond}} = 0, \quad (2)$$

where α_{sol} is the solar reflectance, G the global irradiance on the surface, ε the thermal emittance, $L_{\downarrow}$ the incoming long-wave radiation from the sky, $\sigma = 5.67 \times 10^{-8} \text{ W}/(\text{m}^2 \text{ K}^4)$ the Stefan–Boltzmann constant, T_s the surface temperature, T_a the air temperature, h_c the convective heat transfer coefficient and q_{cond} the heat conducted into the construction.

Table 9: Assumptions for the energy balance. Every value needs a source.

Quantity	Value used	Justification / source
G	[TODO:] W/m^2	[TODO: MeteoSwiss, clear-sky summer day]
T_a	[TODO:] $^{\circ}\text{C}$	[TODO:]
h_c	[TODO:] $\text{W}/(\text{m}^2 \text{ K})$	[TODO: low wind speed in a street canyon]
$L_{\downarrow}$	[TODO:] W/m^2	[TODO: clear-sky estimate; state the correlation used]
α_{sol} reference	[TODO:]	[TODO: aged bitumen / plaster]
α_{sol} concept	[TODO:]	[TODO:]

Result and meaning. [TODO: Solve Eq. (2) for T_s for the reference and for the concept, report both, and state explicitly what the difference does and does *not* prove (see the note on KPI 3 in Section 2.7).]

3.2.6 Engineering check 2: [TODO: title]

[TODO: Options that are realistic within the week: (a) a simple outdoor measurement — identical plates with different surfaces, logged with a thermometer or a temperature sensor over a few hours; (b) a transient 1-D model of the build-up over a diurnal cycle; (c) a water balance — litres of rainwater per square metre per hot day against the latent heat of vaporisation of $2.45 \text{ MJ}/\text{kg}$; (d) a material and cost comparison. Report method, raw data, result and uncertainty.]

Table 10: Decision matrix. Ratings 1–5, weights from Section 2.7. Every rating must be justified in the text.

KPI	Weight	Concept A	Concept B	Evidence used
1 – Solar reflectance	[TODO:]	[TODO:]	[TODO:]	[TODO:]
2 – Thermal emittance	[TODO:]	[TODO:]	[TODO:]	[TODO:]
3 – Peak surface temperature	[TODO:]	[TODO:]	[TODO:]	[TODO:]
4 – Heat into the building	[TODO:]	[TODO:]	[TODO:]	[TODO:]
5 – Night radiative cooling	[TODO:]	[TODO:]	[TODO:]	[TODO:]
6 – Potable water use	[TODO:]	[TODO:]	[TODO:]	[TODO:]
7 – Durability of the optics	[TODO:]	[TODO:]	[TODO:]	[TODO:]
Weighted total		[TODO:]	[TODO:]	

3.3 Concept Evaluation & Iteration

3.3.1 Review and feedback

[TODO: World café peer feedback, instructor feedback, and AI used as a critical reviewer — including where the team disagreed with the AI and why. This belongs in Appendix A as well.]

3.3.2 Selection and Final Concept V2

[TODO: State which concept (or justified hybrid) was selected and describe V2 in detail.]

Table 11: Final output of the creating and evaluating phase: Concept V1a/b → engineering review → evidence → Concept V2.

What changed	Why it changed	Evidence that informed the change
[TODO:]	[TODO:]	[TODO:]
[TODO:]	[TODO:]	[TODO:]

3.3.3 Remaining uncertainties

[TODO: What is still unproven, and what should be tested or developed next.]

4 Sustainability & Life's Principles

4.1 Application of Life's Principles to the final concept

[TODO: Take the principles from Section 2.8 and assess each one honestly: how well does the final concept apply it, and where does it fall short? A table with a short assessment per principle works well. Listing principles without assessing them is explicitly marked down in the rubric.]

4.2 Environmental benefits, limitations and trade-offs

[TODO: Quantify where possible. The trade-offs that are already visible for this challenge:]

- **Summer vs. winter:** a high solar reflectance reduces summer heat gain but also reduces useful passive solar gains in winter. [TODO: estimate both and give the net balance for the Swiss climate]
- **Cooling vs. water:** evaporative cooling costs roughly 2.45 MJ per kilogram of water evaporated. [TODO: convert this into litres per square metre per hot day and check it against the rainwater actually available on site — during a heat wave it will not rain, which is precisely the point of the storage function F7]
- **Local vs. global:** the concept moves heat out of the street canyon; state clearly whether it reduces total energy demand or only redistributes heat.
- **Materials:** [TODO: pigments, binders, biocides against algae, end of life, separability of the layers, recyclability]

4.3 Influence of sustainability considerations on the design

[TODO: Name at least one concrete design decision that was changed because of a sustainability consideration — otherwise this section reads as an add-on.]

5 Discussion & Conclusion

5.1 Contribution of the biomimicry process

[TODO: Be concrete and honest. Which idea came specifically from the biological model, and which would a conventional engineering approach have produced anyway? A well-argued “this part was conventional” is worth more than an overstated claim.]

5.2 Strengths and weaknesses of the final concept

[TODO:]

5.3 Assessment against the challenge and the KPIs

[TODO: Go back through KPIs 1–7 from Table 6 and state for each one whether it was met, missed, or could not be assessed with the available evidence.]

5.4 Innovative character and limits of the evidence

[TODO: State clearly what has been demonstrated (calculation, measurement, literature) and what remains an assumption.]

6 References

- Akbari, Hashem, Surabi Menon, and Arthur Rosenfeld (2009). “Global cooling: Increasing world-wide urban albedos to offset CO₂”. In: *Climatic Change* 94.3, pp. 275–286. DOI: [10.1007/s10584-008-9515-9](https://doi.org/10.1007/s10584-008-9515-9).
- Baumeister, Dayna et al. (2014). *Biomimicry Resource Handbook: A Seed Bank of Best Practices*. Missoula, MT: Biomimicry 3.8.
- Biomimicry Institute (n.d.). *AskNature*. <https://asknature.org/>. Accessed [TODO: date].

- Ehleringer, James and Harold A. Mooney (1978). “Leaf hairs: Effects on physiological activity and adaptive value to a desert shrub”. In: *Oecologia* 37.2, pp. 183–200. DOI: [10.1007/BF00344990](https://doi.org/10.1007/BF00344990).
- Li, Xiangyu et al. (2021). “Ultrawhite BaSO₄ paints and films for remarkable daytime subambient radiative cooling”. In: *ACS Applied Materials & Interfaces* 13.18, pp. 21733–21739. DOI: [10.1021/acsami.1c02368](https://doi.org/10.1021/acsami.1c02368).
- Martins, António F. et al. (2018). “Locally-curved geometry generates bending cracks in the African elephant skin”. In: *Nature Communications* 9, p. 3865. DOI: [10.1038/s41467-018-06257-3](https://doi.org/10.1038/s41467-018-06257-3).
- MeteoSwiss (n.d.). *Climate data of the automatic monitoring network*. Federal Office of Meteorology and Climatology MeteoSwiss. Zurich stations; access via IDAWEB / opendata. **[TODO: name the exact stations and reference period you use]**.
- Oke, T. R. (1982). “The energetic basis of the urban heat island”. In: *Quarterly Journal of the Royal Meteorological Society* 108.455, pp. 1–24. DOI: [10.1002/qj.49710845502](https://doi.org/10.1002/qj.49710845502).
- Raman, Aaswath P. et al. (2014). “Passive radiative cooling below ambient air temperature under direct sunlight”. In: *Nature* 515.7528, pp. 540–544. DOI: [10.1038/nature13883](https://doi.org/10.1038/nature13883).
- Santamouris, M. (2014). “Cooling the cities — A review of reflective and green roof mitigation technologies to fight heat island and improve comfort in urban environments”. In: *Solar Energy* 103, pp. 682–703. DOI: [10.1016/j.solener.2012.07.003](https://doi.org/10.1016/j.solener.2012.07.003).
- Shi, Norman Nan et al. (2015). “Keeping cool: Enhanced optical reflection and radiative heat dissipation in Saharan silver ants”. In: *Science* 349.6245, pp. 298–301. DOI: [10.1126/science.aab3564](https://doi.org/10.1126/science.aab3564).
- Stadt Zürich (Jan. 20, 2020a). *Fachplanung Hitzeminderung*. Programm Klimaanpassung. Modelling by GEO-NET Umweltconsulting GmbH. File: `fp-hitzeminderung-bericht.pdf`. Zürich: Grün Stadt Zürich. URL: https://www.stadt-zuerich.ch/fachplanung_hitzeminderung.
- (2020b). *Teilpläne zur Fachplanung Hitzeminderung: Hitzeminderung, Kaltluftsystem, Entlastungssystem*. Stadt Zürich. Files: `teilplan-hitzeminderung.pdf`, `teilplan-kaltluftsystem.pdf`, `teilplan-entlastungssystem.pdf`.
- (Jan. 20, 2020c). *Umsetzungsagenda 2020–2023 zur Fachplanung Hitzeminderung*. Programm Klimaanpassung. File: `fp-hitzeminderung-umsetzungsagenda.pdf`. Zürich: Umwelt- und Gesundheitsschutz Zürich.
- (2021). *Merkblatt Hitzeminderung in der Stadt Zürich*. Umwelt- und Gesundheitsschutz Zürich, Fachbereich Umweltpolitik. Planning aid for building and land owners. File: `merkblatt-fp-hitzeminderung`.
- (n.d.). *Open Data Katalog der Stadt Zürich*. <https://data.stadt-zuerich.ch/>. Building footprints, tree cadastre, climate layers. Accessed **[TODO: date]**.
- Swiss Federal Office of Energy (n.d.). *sonnendach.ch — solar irradiance per roof surface*. <https://www.sonnendach.ch/>. Irradiation, orientation, tilt and usable area per roof. Accessed **[TODO: date]**.
- Turner, J. Scott and Rupert C. Soar (2008). “Beyond biomimicry: What termites can tell us about realizing the living building”. In: *Proceedings of the First International Conference on Industrialized, Intelligent Construction (I3CON)*. Critical re-assessment of the termite-mound ventilation narrative — read before citing the Eastgate Centre example. Loughborough University.
- U.S. Geological Survey (n.d.). *Landsat 8–9 Collection 2 Level-2 surface temperature products*. <https://earthexplorer.usgs.gov/>. Used for the independent surface-temperature check of the reference site. Accessed **[TODO: date]**.
- Vukusic, Pete, Benny Hallam, and Joe Noyes (2007). “Brilliant whiteness in ultrathin beetle scales”. In: *Science* 315.5810, p. 348. DOI: [10.1126/science.1134666](https://doi.org/10.1126/science.1134666).
- Zhai, Yao et al. (2017). “Scalable-manufactured randomized glass-polymer hybrid metamaterial for daytime radiative cooling”. In: *Science* 355.6329, pp. 1062–1066. DOI: [10.1126/science.aai7899](https://doi.org/10.1126/science.aai7899).

Appendix A – AI Use Statement

Relevant AI-supported activities are documented below. Not every prompt is listed; the focus is on how AI contributed to the work and how important outputs were verified. AI output is not used as evidence for factual claims.

Table A.1: AI use statement.

AI tool	Used for	How the output influenced the project	How important output was verified
AskNature Chat	Discovering biological strategies for functions F1–F8	[TODO: e.g. generated candidate organisms for further research]	[TODO: AskNature profile + peer-reviewed paper]
[TODO: LLM assistant]	[TODO: e.g. structuring the scoping, drafting the LaTeX report template, critical review of the concepts]	[TODO: e.g. produced the first draft of the function list, which the team revised]	[TODO: e.g. every biological and physical claim checked against the cited primary sources; benchmark values recomputed by hand]

Appendix B – Optional Supporting Material

[TODO: Additional calculations, extended concept drawings, raw measurement data or prompt excerpts where useful.]