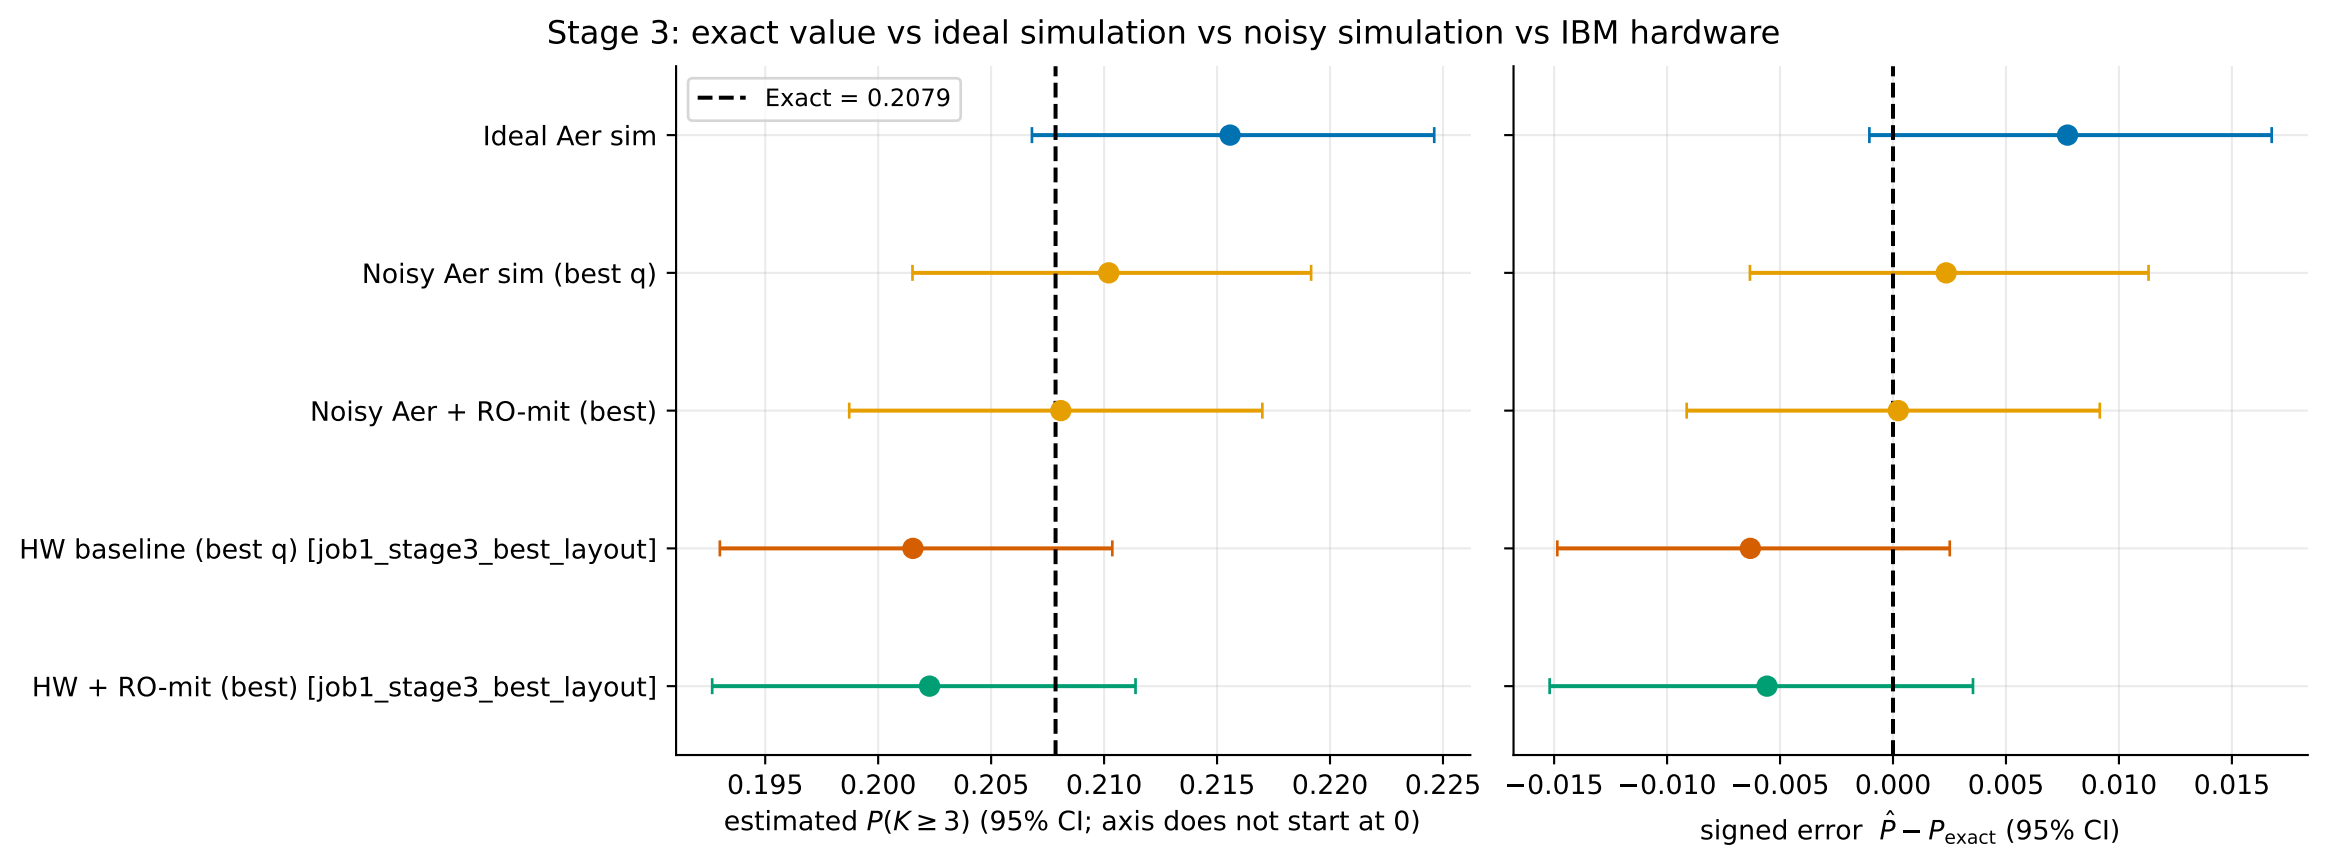
Stage 3: exact value vs ideal simulation vs noisy simulation vs IBM hardware
Exact = 0.2079
Ideal Aer sim
Noisy Aer sim (best q)
Noisy Aer + RO-mit (best)
HW baseline (best q) [job1_stage3_best_layout]
HW + RO-mit (best) [job1_stage3_best_layout]
0.195
0.200
0.205
0.210
0.215
0.220
0.225
estimated $P(K \geq 3)$ (95% CI; axis does not start at 0)
−0.015
−0.010
−0.005
0.000
0.005
0.010
0.015
signed error $\hat{P} - P_{\text{exact}}$ (95% CI)
Intervals show shot noise only; hardware systematic error is the distance from the dashed line.