

Accessories

Connector ASA Series

Description


The asa universal connector is a patented system that offers many possibilities regarding dimension and direction of the hydraulic connection.

With each connector you can choose from 3 directions how to install it into the hydraulic circuit. The stream optimized design reduces the total pressure drop on the cooler. The omission of screwed joints reduces the number of sealing surfaces. The available connector dimensions depend on the cooler size and are shown in the table below.


Our newest option is an intermediate plate for having an additional BSP ½" port, which can also be turned in any required direction.

Dimensions

AUC NG 32 – 40 Connectors

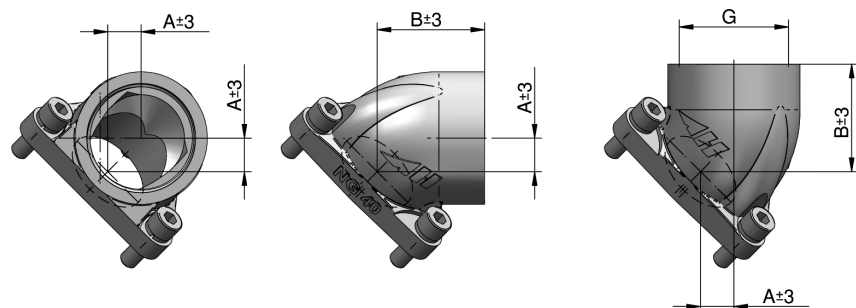

Intermediate plate NG 40

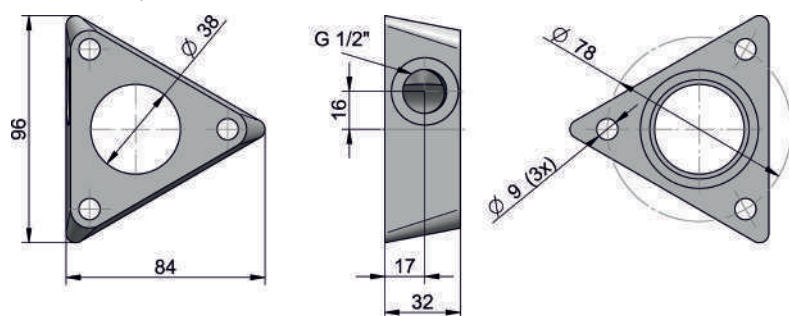

Technical Data

order number	description	A	B	G	connector material	o-ring	weight
		[mm]	[mm]				[kg]
ILLZASA32G32I00	AUC NG 32 – G 1 ¼"	14	34	BSP 1 ¼"	aluminium	NBR, 70 shore, 44x3mm	0,31
ILLZASA40G40I00	AUC NG 40 – G 1 ½"	15	47	BSP 1 ½"			0,29
ILLZASA40-40G12I00	intermediate plate NG 40	-	-	-			0.30

Content (except intermediate plate)

asa universal connector	2x
o-ring	2x
screw	6x
spring ring	6x

Fits On Cooler Types

ILLZASA32G32I00	ASA 0177, 0257, 0367, 0467, 0567, 0727, 0927
ILLZASA40G40I00	ASA 0177, 0257, 0367, 0467, 0567, 0727, 0927



requires 2pcs per cooler



packed size: 2 pieces