


Accessories

Adapter Flange DN 40 – DN 125



The **asa** suction unit is screwed to the **asa** adapter flange, which is welded to the tank. Due to low installation costs and compact design, purchasing asa suction units is cost effective. A switch (mechanical or inductive) can be mounted on the standard block for monitoring matters. The adapter flange may only be welded with demounted butterfly flange.

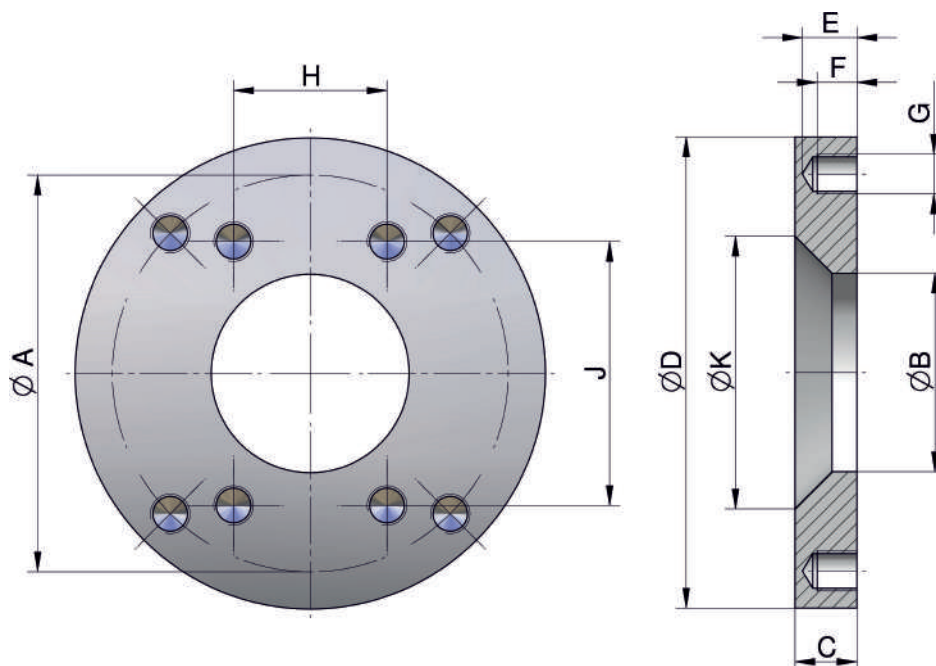

order number	description	A	B	C	D	E	F	G	H	J	K	weight
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
SDAET040KI00	adapter 40	110	49	25	130	22	14	M12 (4x)	--	--	89±1	1,85
SDAET063KI00	adapter 50 & 63	125	63	25	150	22	14	M12 (4x)	--	--	103±1	2,45
SDAET080KI00	adapter 80	--	80	25	150	22	16	M16 (4x)	62	106	109±1	2,14
SDAET100KI00	adapter 100	--	100	25	180	22	16	M16 (4x)	77,8	130	139±1	2,80
SDAET125KI00	adapter 125	--	125	25	205	22	16	M16 (4x)	92	152	164±1	3,30

Material

flange material	steel 1.0037 or 1.0570
-----------------	------------------------

Corrosion

delivery condition	oiled
--------------------	-------

Fits On

SDAET040K	SDA0040I00, SDA00040I00
SDAET063K	SDA0050I00, SDA0063I00, SDA00050I00, SDA00063I00
SDAET080K	SDA0080I00, SDA00080I00
SDAET100K	SDA0100I00, SDA00100I00
SDAET125K	SDA0125I00, SDA00125I00

