


Fluid Controls/Tank Accessories

Air Breather with splash guard




Our series of air breathers with splash guard combines an air filter with a filler basket for highest safety and cleanness of the oil at filling and during operation.

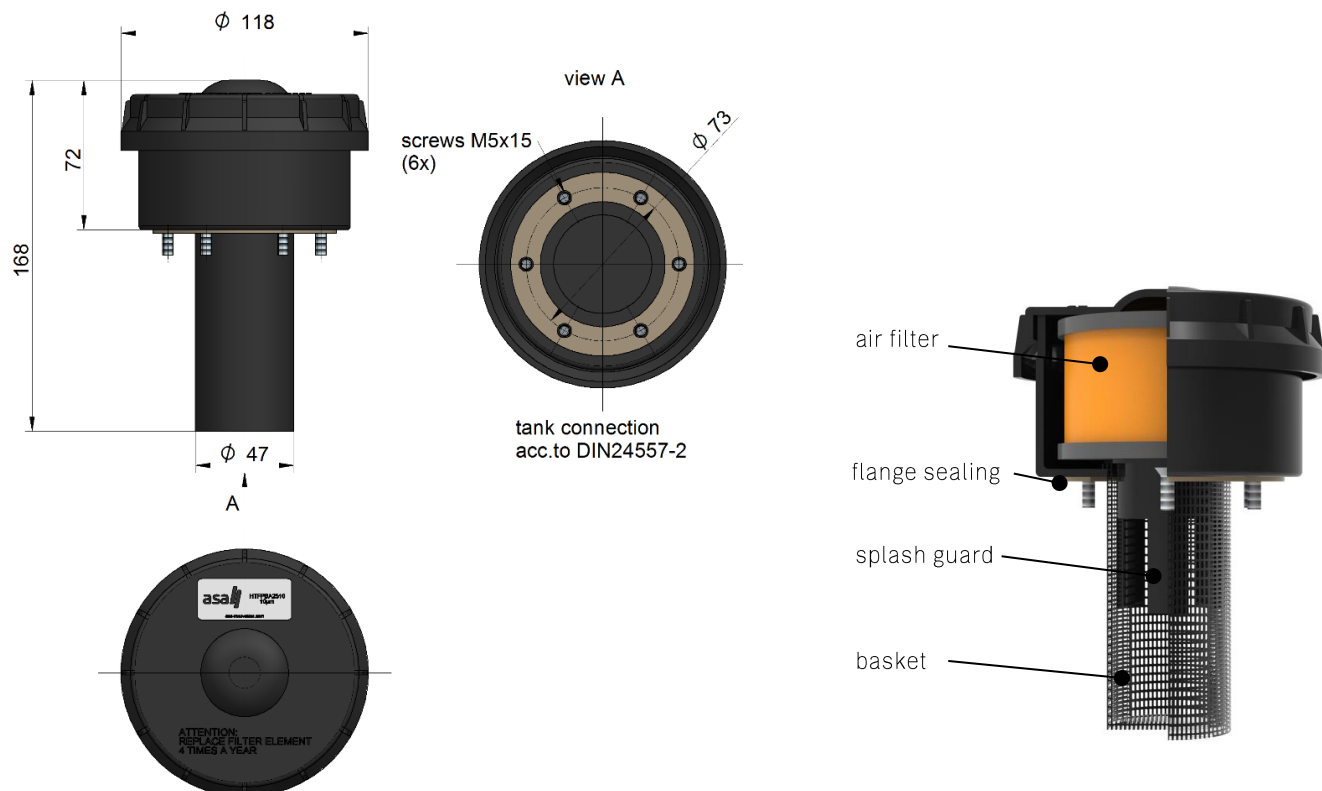

Technical Data

order number	description	filtration	air flow rate	weight
		[µm]	[l/s]	[kg]
HTFPBA2510NIOO	Breather with splash guard 10 µm	10	16,5	0,3
HTFPBA2525NIOO	Breather with splash guard 25 µm	25	23,6	0,3

Order Number Code/Options

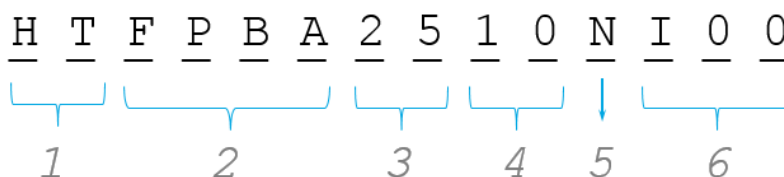

1 Product Series

HT	Tank accessories
----	------------------

2 Design Type

FPBA	breather with basket series
------	-----------------------------

3 Type

25	air flow
----	----------

4 Filter rating

10	10 µm
25	25 µm

5 Sealing material

C	cork sealing
N	NBR sealing

6 Customized

IOO	standard India delivery kit
Ixx	Special / customized specifications, to be advised

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-mS. General tolerances for casted parts according to EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+G). The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

Fluid Controls/Tank Accessories

Air Breather with splash guard



Materials

housing	Polyamide
basket	Polyamide
filter	cellulose

Temperature

working temperature	-20°C to +80°C
---------------------	----------------

Compatibility

Full with fluids: HH-HL-HM-HR-HV-HG
(according to ISO 6743/4)

Spare Part Filters

HTFPBA25E10I00	filter element for HTFPBA2510NI00
HTFPBA25E25I00	filter element for HTFPBA2525NI00



This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-vL. General tolerances for casted parts according to EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C). The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

DD-HTFPBA-in-rev0

© asa technology, January 2020

2/2