Lumi lab Smart Camera

Product Manual V3.3

Read carefully before using the device and keep it for subsequent use

Download

Search for "Lumi Lab" in the App Store or scan the QR code below to download and install the Lumi Lab App.

Scan the QR code to download the Lumi Lab App

Electronic manual

Use the Lumi Lab App to scan the QR code on the camera to add the device and follow the instructions to view the electronic manual of the device.

Reset the camera

1. Power on the camera. (For 4G camera, please ensure the SIM card has been inserted into the camera before powering on.)

2. Press and hold the reset button for several seconds, the camera will prompt"Reset completed".

SIM card slot

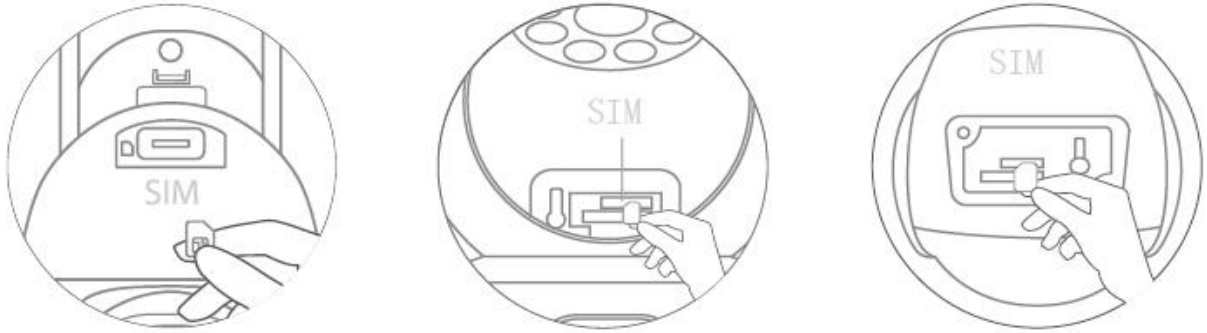

Reset button

Note: The position of the reset button and SIM card slot is for reference only, depending on your device.

Add camera

1. Open the App to register your account and log in.

2. Click the "+" icon and scan the QR code on the device.

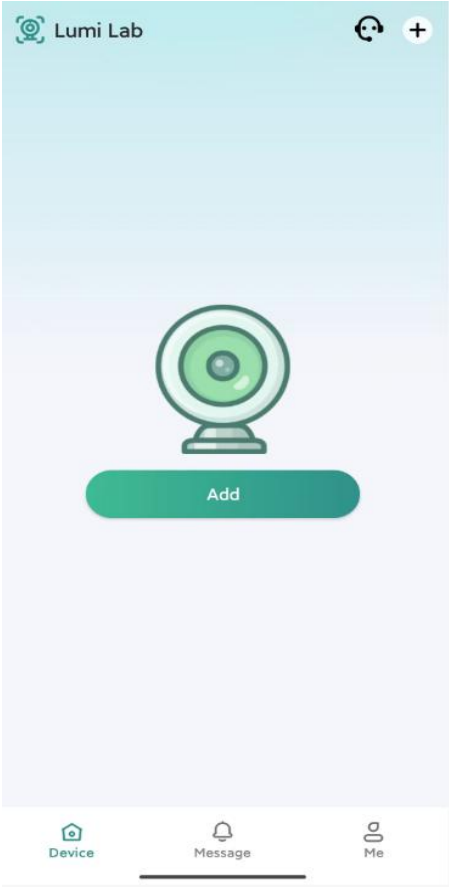

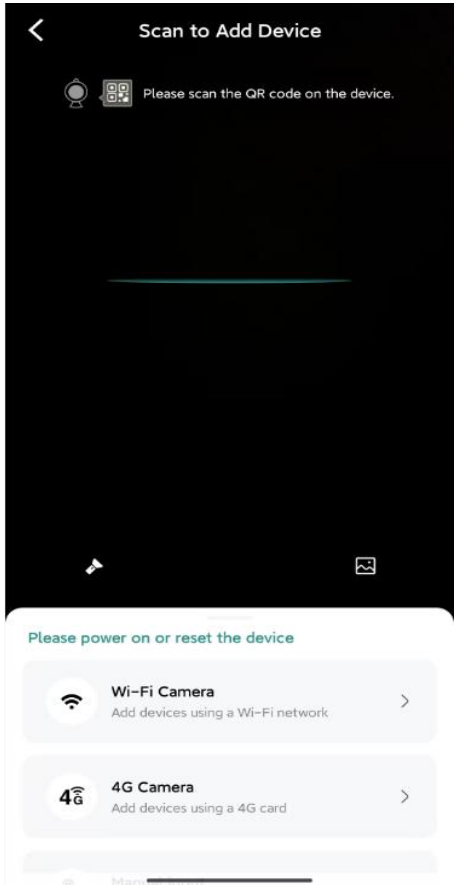

Note: Each App version may be different, please follow the prompts in the latest version of App to set up the camera

After scanning the QR code on the device, please select the corresponding network configuration method according to your network configuration interface.

WIFI

1. Bluetooth network connection, please check page 6.
2. QR code network connection, please check page 8.
3. AP hotspot connection, please check page 10.

4G

Please check page 14.

Solar-powered camera equipment announcement message

Wi-Fi camera

1. The machine is not powered on, so there will be no any prompts.

2. After the machine is powered on, it will emit white light.

3.When the white light goes out, the machine will make a voice announcement: The equipment is ready. Please scan the code to bind.

4.When the machine indicates that the binding is successful, restore stability.

4G camera

1. Indicator is off: device is powered off or standby mode;

2. Indicator is red: device is powered on and wakes up, but the network is unavailable;

3. Indicator is yellow: device is connected to the network;

4. Indicator red light flashes continuously: device can't detect the SIM card, please check whether the card is inserted;

5. Indicator red light flashes twice continuously: SIM card can be detected, but device can't connect to the Internet. Please check whether mobile data plan is available.

Wi-Fi camera device connection

Note: Turn on your phone's Bluetooth and keep the hotspot connection active before you add a camera

1.Turn on the Bluetooth on your phone

2. locate the smart camera device that needs to be added.

3.Connect your mobile phone to 2.4GHz Wi-Fi.

4. Confirm the connected Wi-Fi and enter the password.

3. The device will prompt "Received configuration information, connecting"Please be patient when using the device for the first time.

4. After the device prompts "Network connected", it means that the device has connected to the network and is successfully added.

QR code network connection

1. Please select the Wi-Fi that the device needs to connect to,and enter the correct password.

Note:The device only supports 2.4GHz Wi-Fi. Please select Wi-Fi without"5G".

The name of Wi-Fi should not contain special symbols.

2. The App will generate the QR code and then use the camera to scan it.

3. After the device identifies the QR code successfully, it will prompt "Received configuration information, connecting". Please be patient when using the device for the first time.

4. After the device prompts "Network connected", it means that the device has connected to the network and is successfully added.

15cm~30cm

*Adding completed" is on page 13

AP hotspot connection

The device also supports the "AP hotspot connection".

Please ensure the device has been reset.

1. Click "+" in the upper right corner, swipe up the bottom and select"Wi-Fi Camera" - "AP hotspot connection".

2. Select the Wi-Fi that the device needs to connect to, and enter the correct password.

3. Connect to the hotspot of the device based on the App instructions.

Note: You can find the corresponding ID on the device body tag which is for the hotspot's name.

*Adding completed" is on page 13

4. After connecting to the device hotspot, return to the App and follow the system prompts to complete the setup.

For some devices, no code is required.

Adding completed

After the camera prompts "Network connected",you can create a group for the camera and set the name.

Add 4G camera

After the camera is successfully networked, it will appear online and you can create a group for the camera and set the name.

APN settings

1. Click "APN information settings" to set APN parameters.

2. After the setting is complete, click "Next".

3. Short press the reset button on the device for one second. The device's yellow indicator light will flash or the device will prompt a sound of "Beep",which means it has entered the APN setting mode.

If the 4G camera is offline, please try to set APN.

Please contact your SIM card operator for APN information.

4. The App will generate the QR code and then use the device to scan this QR code.

5. After the device identifies the QR code successfully, it will prompt a notification sound.

Attentions

Cloud service

You can enjoy these special functions after subscribing the cloud service on the [Cloud] interface of the Lumi Lab App.

- Concerning Micro SD card recording, when the recording capacity reaches the upper limit, the earliest recording file of the recording event will be automatically over written.
- Long-term use in the unconventional environment (high temperature, high humidity,large amounts of dust or smoke, etc.) may damage the camera.
- Lumi Lab App and device firmware will be updated from time to time. For your best experience, please update the App and upgrade the device firmware in time.

* Cloud service is a value-added service that requires payment.