1 The problem

All four reactor experiments in CHE331 (Batch, CSTR, PFR and RTD) are run at fixed conditions: one reactor, three flow rates, three temperatures and equal dilute feeds of NaOH and ethyl acetate. Readings are written down and analysed later, so nobody sees what is happening inside the reactor while the rig is running. Questions such as why conversion falls with flow, what a dead zone does, or why one residence time is not enough to reach steady state are answered in words, never tested. In our own CSTR run the conductivity was still drifting when the "steady" readings were taken, and 28 °C gave more conversion than 40 °C. We had no way to find out why.

The proposal set out to build one web app, used on a laptop next to the rig with no new hardware, that turns the manual readings into proper fits, live plots, assumption checks and what-if studies.

2 What we built

ReactorGenome is a Python web app (Streamlit front end, NumPy/SciPy engine) with one page per experiment and a Design Studio for reactor networks. Every experiment page has the same layout: assumptions on the left, an animated reactor in the middle, results on the right, the readings table below, then the analysis tabs.

2.1 How each part was tested

Before building the screens, every model was checked against closed-form results (ideal CSTR and PFR, tanks in series approaching plug flow, RTD moments, recycle flowsheets). The pages were then checked on the readings from the 2026 CHE331 lab reports, analysed with each report's own conventions. Those readings are used only for checking: the app itself starts with empty tables.

Table 1: Lab-report data used to check each page.

Page	Data used	What was checked
CSTR	$V = 2.15$ L, $C_{A0} = 0.05$ mol/L; three T, three flows	X, k at each T, $E_a = 25.07$ kJ/mol and A match to four figures
PFR	$V = 0.55$ L, $C_{A0} = 0.035$ mol/L; three T, three flows	k at each T and $E_a = 12.70$ kJ/mol match the report
Batch	Group 21, 50.2 °C conductivity trace	Integral and differential fits; order ≈ 1 by the differential method
RTD	Stirred tank and packed bed at 10 and 15 LPH	t_m, σ^2, N and Pe match the report exactly
Design Studio	Analytic network (CSTR then PFR)	Overall X matches the sequential solution; mass balance $< 10^{-8}$

The screenshots below are that same checked session.

2.2 CSTR

Assumptions (equimolar feed, ideal mixing, isothermal, irreversible) sit as switches on the left. Readings are typed exactly as on the lab sheet: one row per run, plus a small Λ_0 table per temperature (Figure 2).

The Results tab puts everything the lab report needs on one screen: E_a, A, k at each temperature with 95% intervals, design plots, Arrhenius, conversion against flow and temperature, single-run k against τ, parity and residuals (Figure 3). The rate-law order (1 to 3) is a setting.

The fitted $k(T)$ then predicts X at any temperature, feed concentration and τ. The right-hand

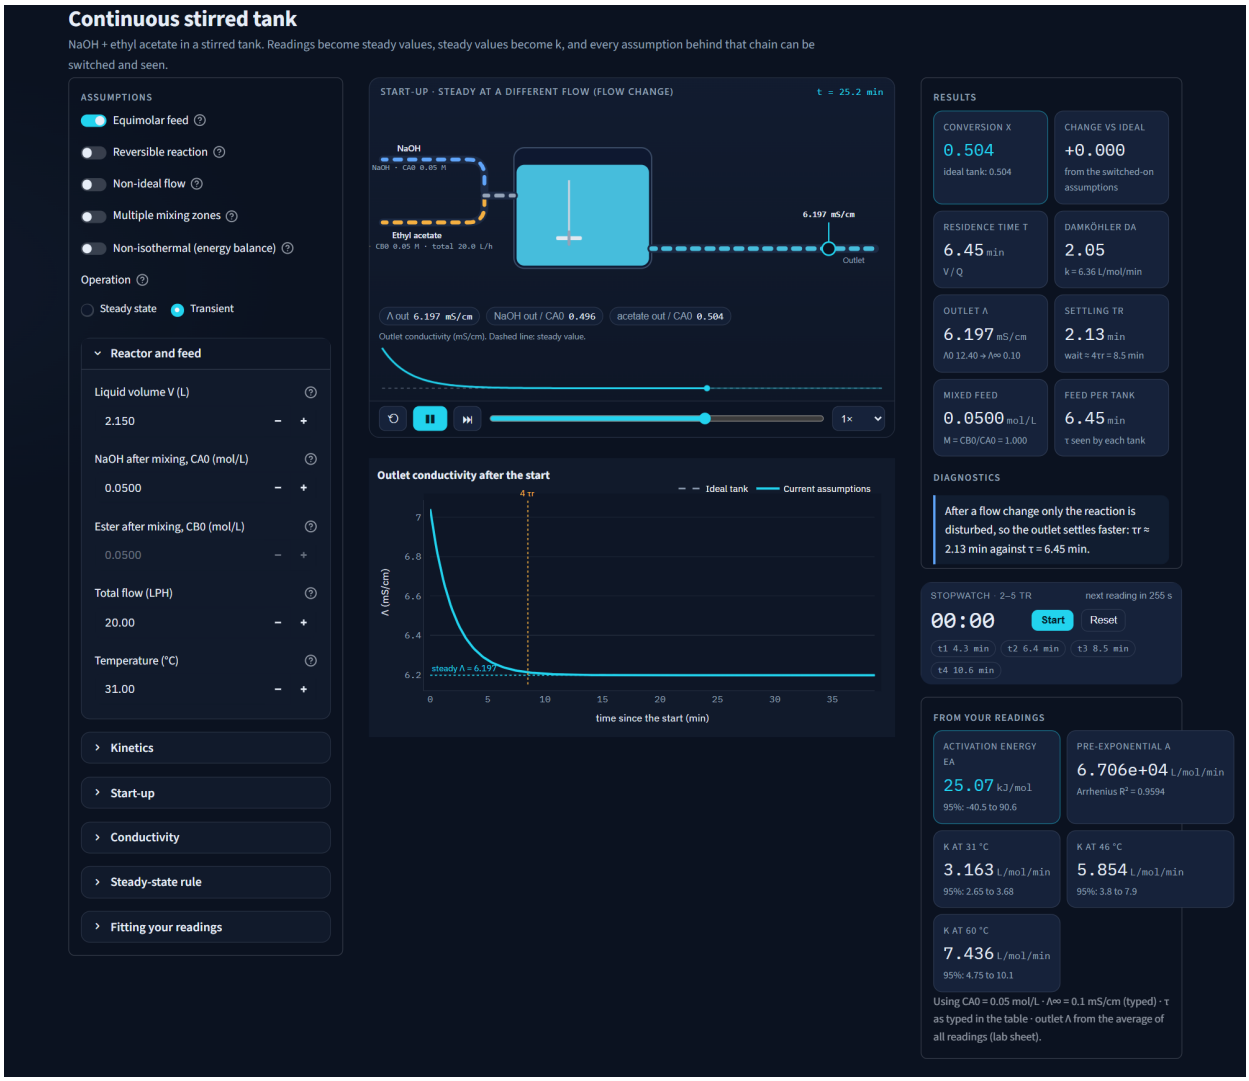


Figure 1: CSTR page: assumption switches, animated start-up, results, and fitted kinetics ($E_a = 25.07\,\mathrm{kJ/mol}$).

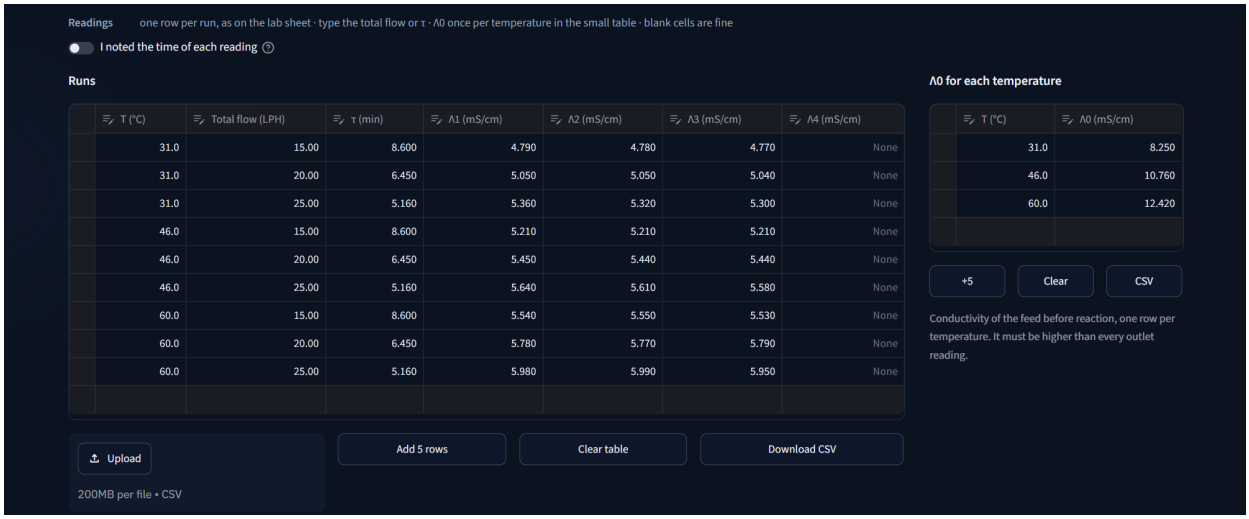


Figure 2: Readings table, laid out like the lab sheet.



Figure 3: Results tab: kinetics and all of the report plots on one screen.

plot shows why one concentration cannot pin down the order: every order fits the runs at the C_{A0} used, and the orders separate only away from it (Figure 4).

The energy-balance tab is the scale-up case from the proposal. With a concentrated feed and a weak jacket (Figure 6) the heat-generation curve crosses the heat-removal line three times: stable states at 31 °C and 134 °C, an unstable one at 80 °C. The phase portrait shows which start-ups run away.

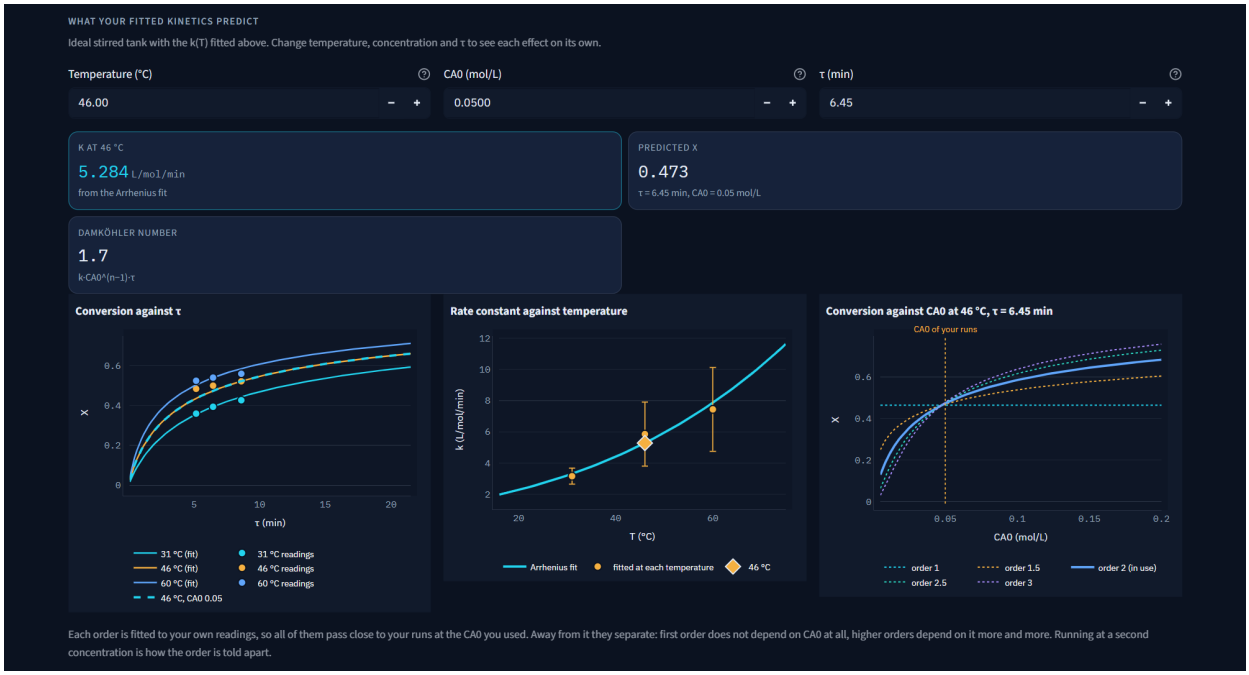


Figure 4: Predictions: X against τ, k against T, and X against C_{A0} for orders 1 to 3.

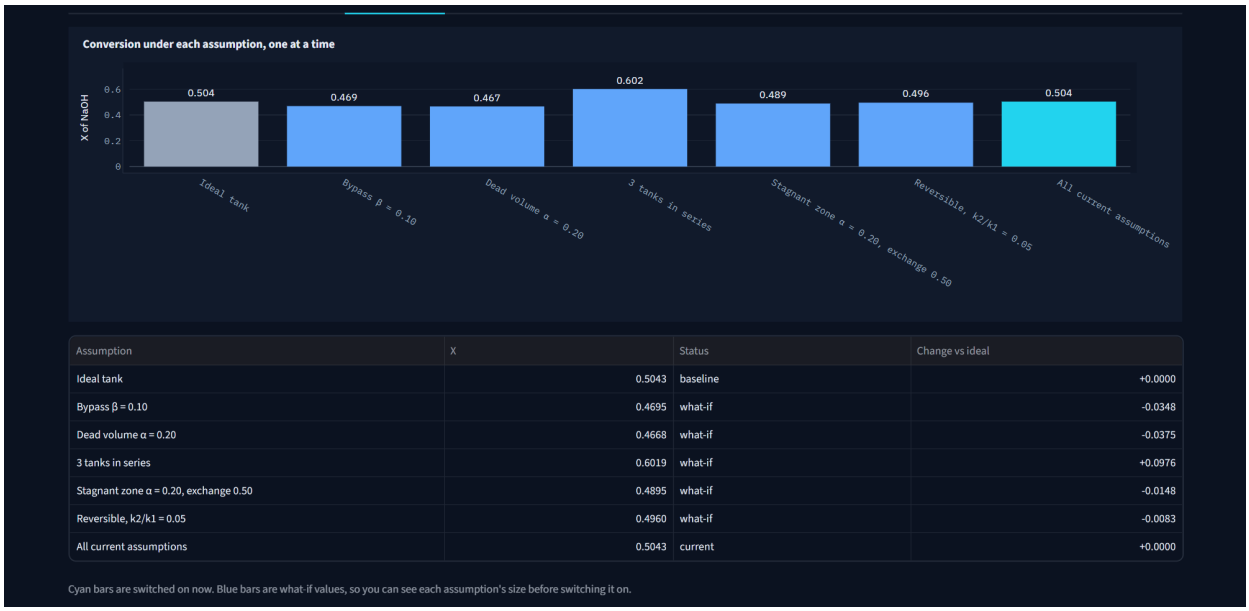


Figure 5: Assumption effects: conversion with each textbook assumption dropped on its own.

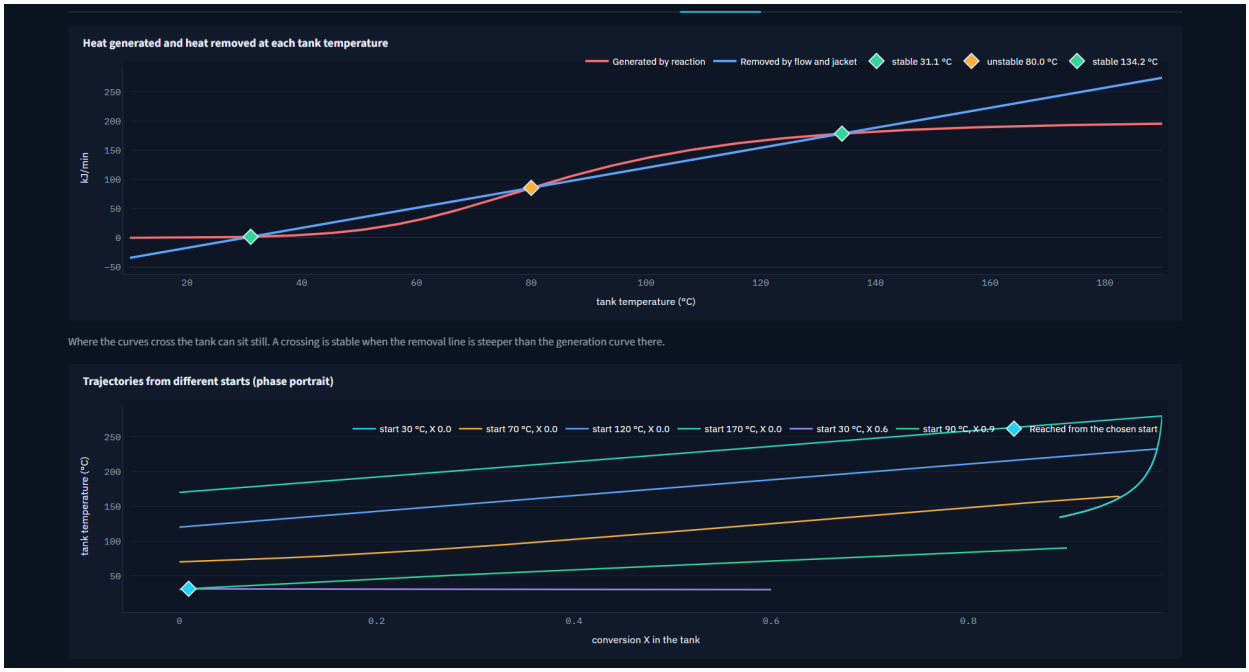


Figure 6: Energy balance: three steady states and the phase portrait ($UA = 40\,\mathrm{J/min/K}$, $E_a = 90\,\mathrm{kJ/mol}$, $\Delta H = -100\,\mathrm{kJ/mol}$).

2.3 PFR

The helical coil is treated as plug flow by default. Axial dispersion, laminar flow, recycle, adiabatic temperature rise and reaction that continues in the sample beaker are switches. Coil Reynolds and Dean numbers come from the coil geometry.

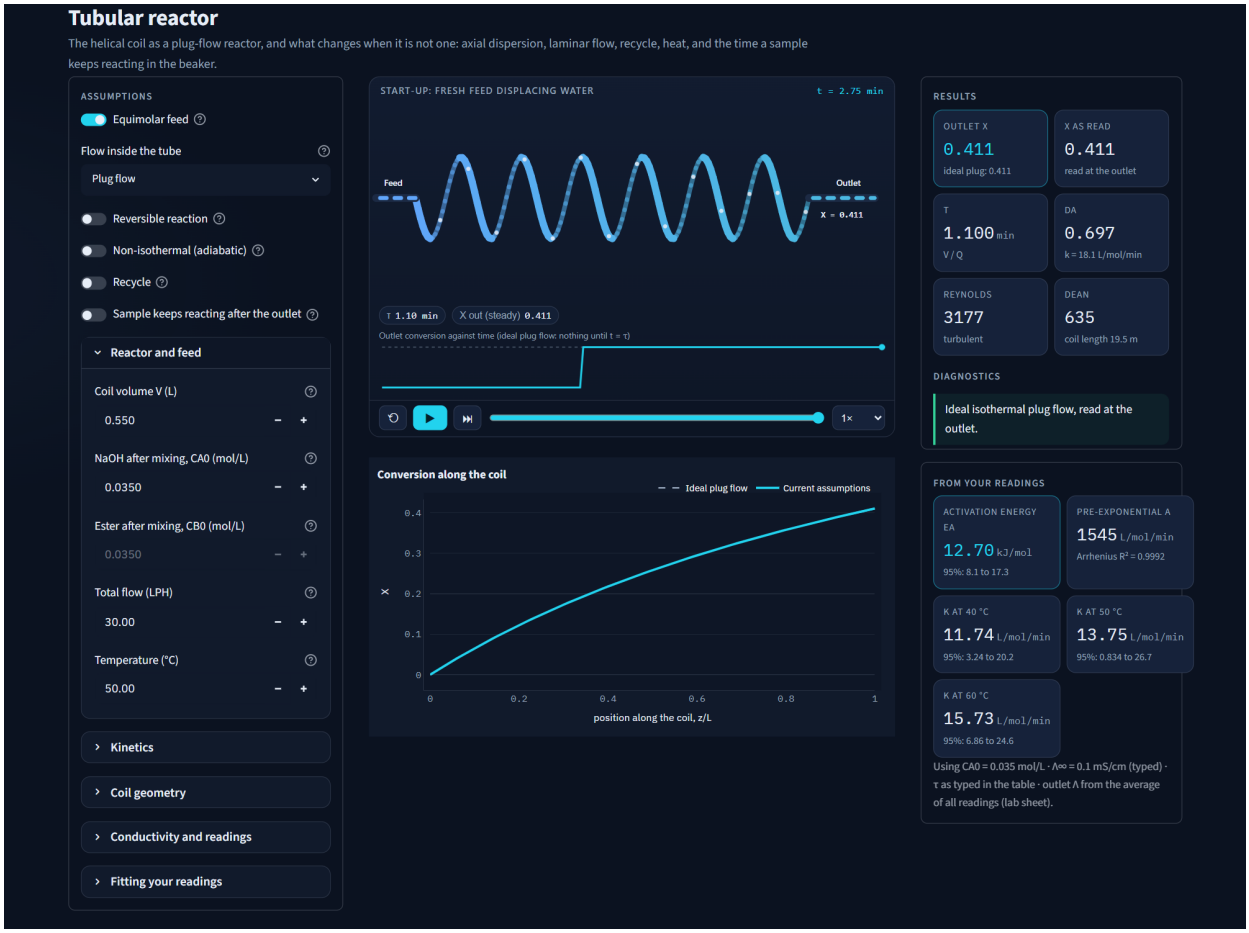


Figure 7: PFR page with fitted kinetics ($E_a = 12.70\,\mathrm{kJ/mol}$, as in the lab report).



Figure 8: PFR results: design plots, Arrhenius, conversion against flow and temperature, parity and residuals.

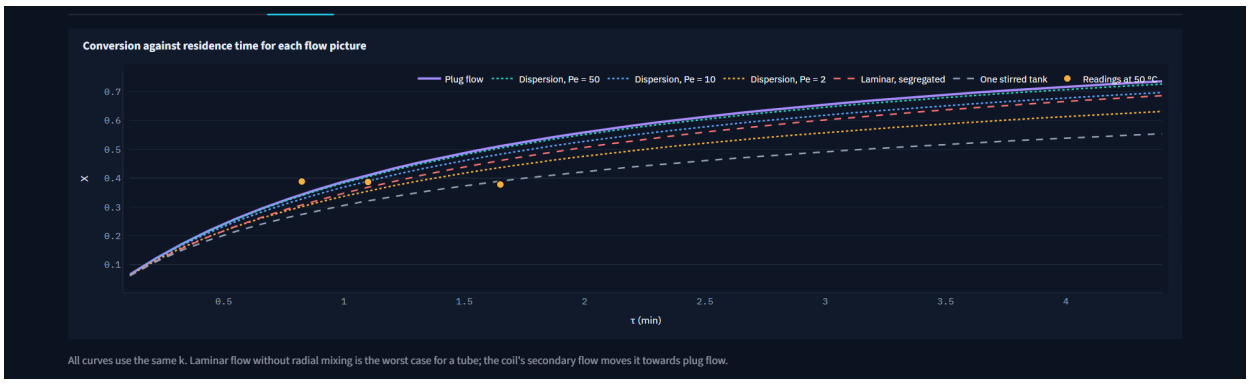


Figure 9: The same k under each flow picture, with the measured points at 50 °C.

2.4 Batch

Conductivity against time is fitted with a choice of rate law (first, second, reversible, or a fitted power). The laws are ranked by AIC. A clock offset covers the seconds between mixing and starting the stopwatch.



Figure 10: Batch page at 50.2 °C: fitted $k = 102.9\,\mathrm{L/mol/min}$ with its interval.



Figure 11: Integral and differential plots, residuals, and rate laws ranked by AIC ($n \approx 1.0$ by the differential method).

2.5 RTD

Up to four tracer runs share one time column. For each run the page gives t_m, σ^2, N (exact and nearest whole number), Pe under three conventions, and fitted tanks-in-series and dispersion models. It warns when the curve was cut off before the tracer had left.

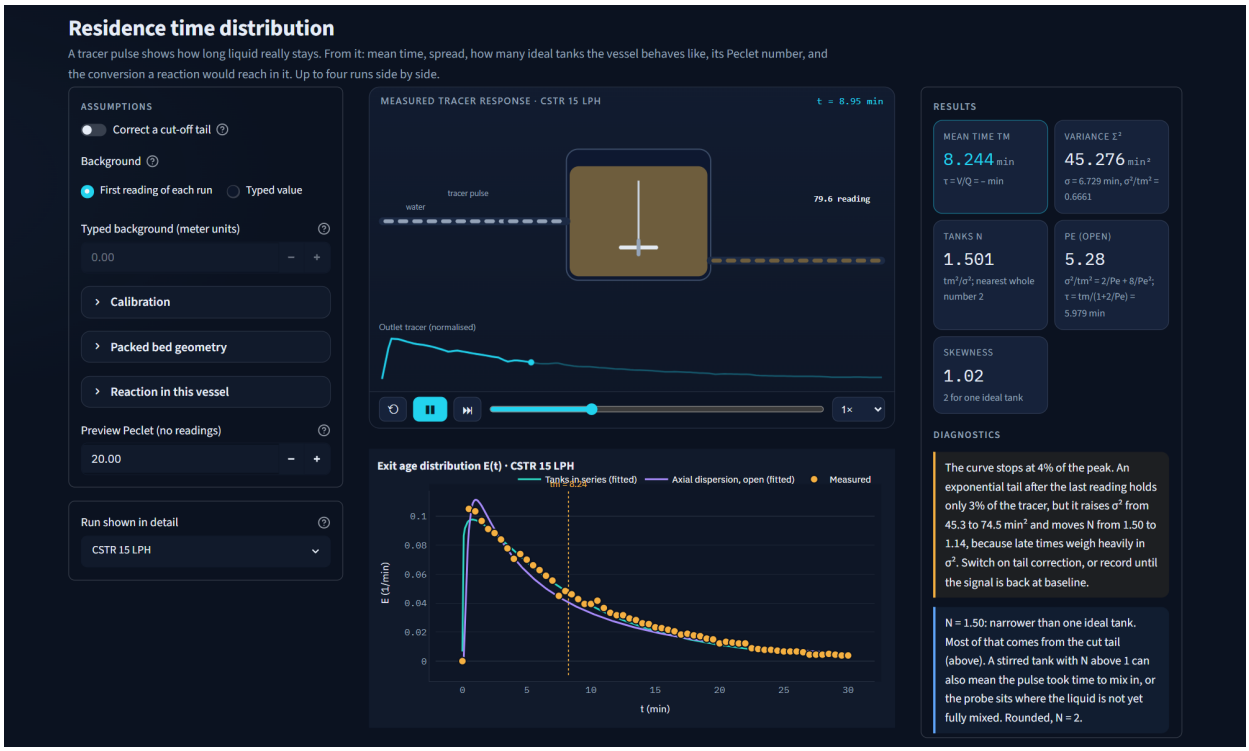


Figure 12: RTD page, stirred tank at 15 LPH. The diagnostic shows that $N = 1.5$ comes mostly from the cut-off tail.



Run	Vessel	Flow (LPH)	V (L)	τ = V/Q (min)	tm (min)	σ² (min²)	σ (min)	σ²/tm²	N = tm²/σ²	N (whole)	Pe (open)	τ = tm/(1+2/Pe) (min)	D_L (m²/s)	Tail added	Last/peak	σ² with tail (min²)
CSTR 15 LPH	Stirred tank	15	None	None	8.244	45.28	6.729	0.6661	1.501	2	5.278	5.979	None	0	0.03704	74.5
CSTR 10 LPH	Stirred tank	10	None	None	11.26	84.28	9.18	0.6643	1.505	2	5.288	8.172	None	0	0.04324	128.8
Packed bed 15 LPH	Packed bed	15	None	None	5.169	1.653	1.286	0.06187	16.16	16	35.93	4.896	None	0	0.004178	1.748
Packed bed 10 LPH	Packed bed	10	None	None	9.083	4.087	2.022	0.04953	20.19	20	44.04	8.688	None	0	0.00363	4.402

Moments by the trapezoid rule on the recorded points, after removing the background. Pe from $\sigma^2/tm^2 = 2/Pe + 8/Pe^2$ (open vessel). D_L needs the bed length, diameter and voidage under 'Packed bed geometry'.

On the θ axis curves from different flows fall on top of each other if the vessel's mixing does not change with flow. A tank sits on the e^−θ line; a packed bed is a narrow peak at θ ≈ 1.

Figure 13: All four runs: tracer curves, $E(t)$, $E(\theta)$ and $F(t)$.



Model	Parameters	Fitted parameters	SSE	R^2
Tanks in series (fitted)	N = 1.1, tm = 8.48	2	4.827e-4	0.9905
Axial dispersion, open (fitted)	τd = 3, Pe = 0.79	2	1.579e-3	0.9689
Tanks in series (moments)	N = 1.5, tm = 8.24	0	5.193e-3	0.8976
Ideal CSTR (τ)	τ = 8.24	0	1.543e-2	0.6959
Ideal CSTR (tm)	τ = 8.24	0	1.543e-2	0.6959

The ideal plug-flow reactor is a spike at τ with no spread; any measured σ^2 rules it out, so it is not in the table.

Figure 14: Model fits ranked by error, with residuals of the best model.

2.6 Design Studio

The Design Studio is the "what the lab cannot do" part of the proposal: build a plant from blocks and solve it as one network, using the same rate law that was fitted on a lab page.

Blocks available on the board are Feed, CSTR, PFR, packed bed, Splitter and Product. They are dragged onto the canvas, connected by pipes, and solved together. Several feeds can enter the same tank; a splitter can send a fraction of its outlet back as recycle or around a unit as bypass. Presets load common layouts in one click: CSTR then PFR, PFR with recycle, bypassed CSTR, two feeds into a tank and a bed, and a jacketed tank with a strong exotherm.

Kinetics come from any lab page that has published a fit, or can be typed. Recycle loops are iterated with Wegstein acceleration until compositions change by less than 10^{-10} mol/L. The mass balance on sodium and acetyl groups is reported and closes to better than 10^{-8}. Each block shows its own conversion, residence time and temperature on the board; the right panel shows overall conversion, product flow, total reactor volume and the number of passes needed to converge (one or two means there is no recycle).

Below the board, six tabs open the plant up:

- **Streams** — every pipe and every unit as a table (flows, compositions, temperatures, jacket duty).
- **Profiles** — NaOH and temperature along the main path against cumulative reactor volume. A stirred tank drops straight to its outlet; a tube or bed falls gradually.
- **Levenspiel** — $1/(-r_A)$ against X along the path, so the area for each unit is its $\tau \cdot C_{A,\mathrm{in}}$.
- **Sweep** — overall conversion against one chosen parameter of one chosen block (volume, flow, splitter fraction, temperature).
- **Compare rigs** — $k(T)$ from every lab page that has published a fit, overlaid on one Arrhenius plot, plus the ideal X–Da curves for a stirred tank and for plug flow.
- **Export** — the same ZIP report as on the experiment pages.

Figure 15 shows the CSTR-then-PFR preset: feed at 0.4 L/min into a 2 L tank ($X = 0.451$ per pass), then a 0.5 L tube ($X = 0.171$ per pass). Overall conversion is 0.545, matching the sequential analytic solution, with mass-balance error below 10^{-8}.

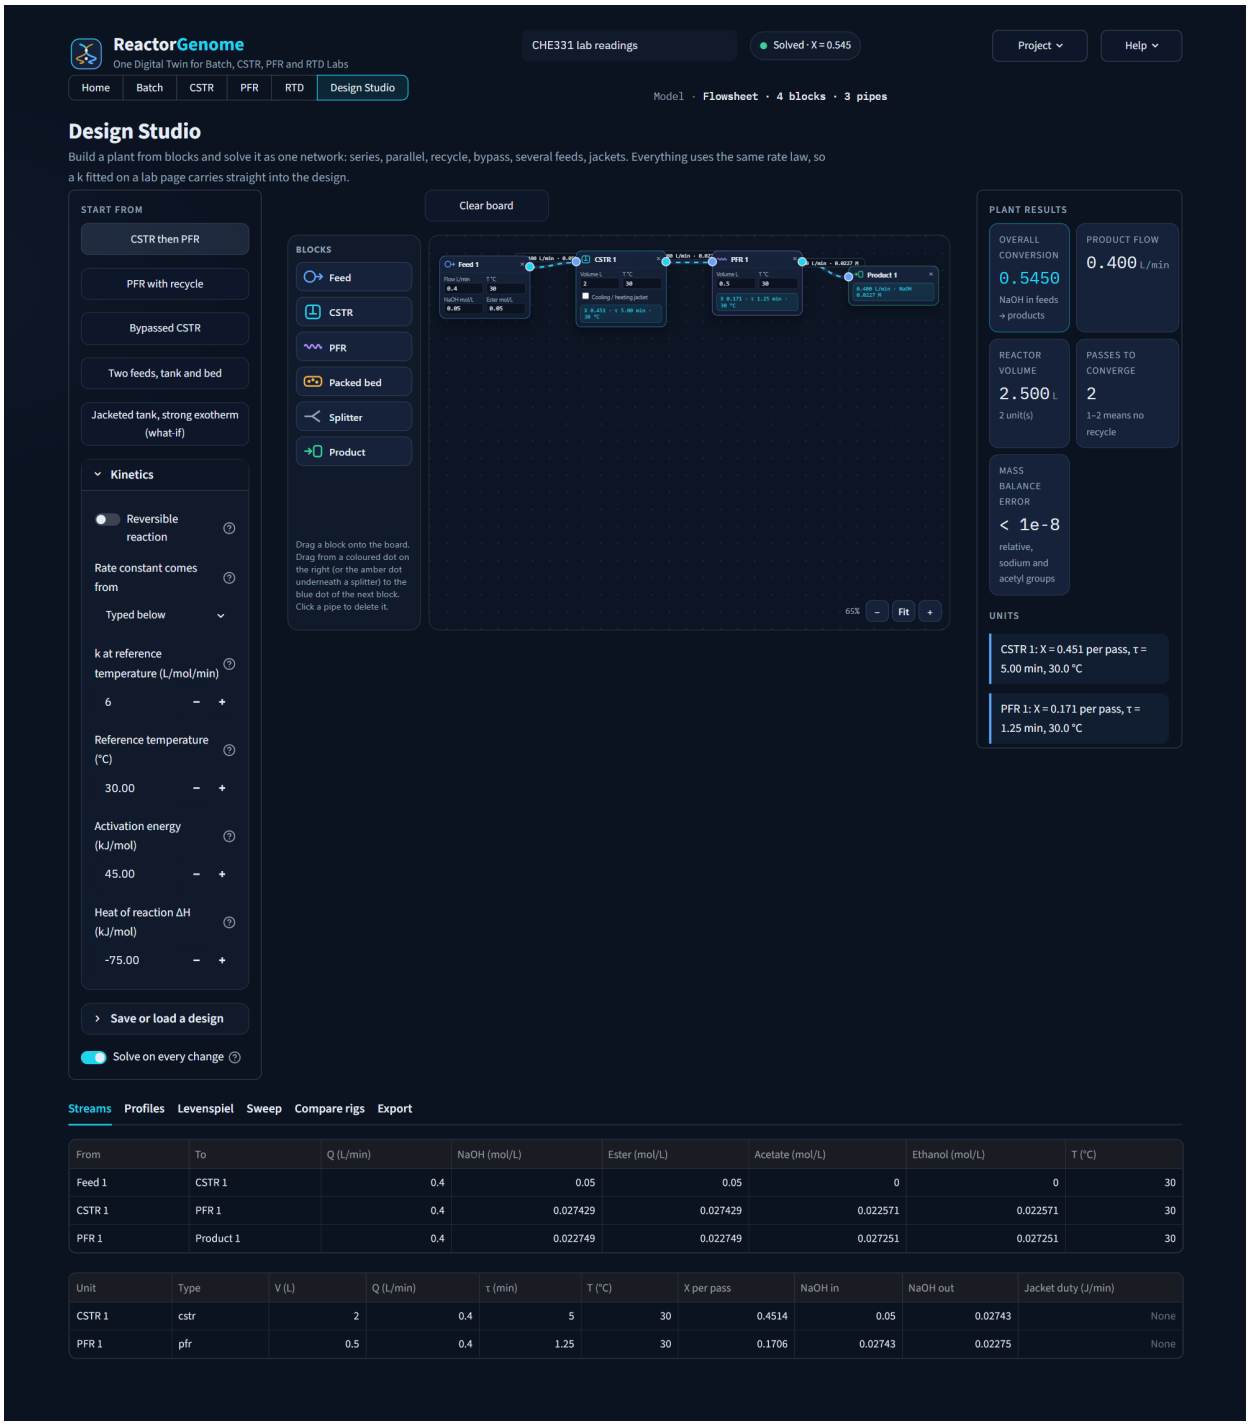


Figure 15: Design Studio: CSTR then PFR. Overall $X = 0.545$, stream table and unit table.

2.7 Export

Every experiment page and the Design Studio export a ZIP: an offline HTML report with the interactive graphs, CSV tables, every plot and every setting used. The whole session also saves as one project file and loads back.



Figure 16: Export tab: ZIP report, HTML-only option, and the sections included.

3 What we delivered

- ✓ Batch, CSTR, PFR and RTD pages with lab-sheet readings tables and live fits
- ✓ Steady-state extrapolation for CSTR readings, with a steady / not-steady verdict when times are typed
- ✓ Conductivity to conversion from ion conductivities (typed Λ_∞ also available)
- ✓ 95% intervals on k, E_a and A; parity and residual plots
- ✓ Assumption switches, with an Assumption-effects comparison on each page
- ✓ Predictions from the fitted kinetics at any T, C_{A0} and τ; reaction order as a setting
- ✓ Energy balance with multiple steady states, runaway and phase portraits
- ✓ Design Studio: drag-and-connect plants (series, recycle, bypass, several feeds, jackets)
- ✓ Levenspiel plots, plant profiles, parameter sweeps, and $k(T)$ shared across pages
- ✓ One-click ZIP / HTML export and project save / load