PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700928

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5626 G1 SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5626-02	*	**ADB**	**YSD-4514127913**	*

Applicable Terminals for this Tool:

7004-5626-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5626-Z0DA	(N)	7004-5626-Z0DW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~2.00mm 0~2.00mm	0.43 0.27		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**	NA			The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	- 0.8		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.00mm	0.83		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.5		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	NA	-		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

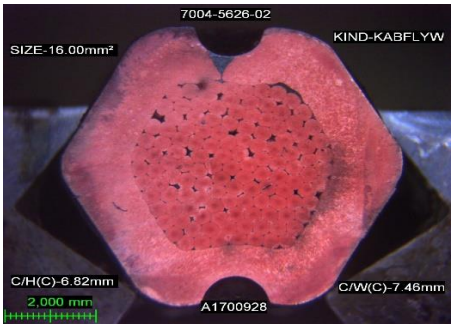2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	6,8	6,84	5,86
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-16.00~16.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2025/jan/03	Date: 2025/jan/03	Date: 2024/dez/23

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700928

LOWER WIRE KIND & SIZE

Wire kind:	KABFLYW		
Wire size:	16		mm^2
Nominal Cr. Height:	6,8	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	6,863	
2	6,859	
3	6,855	
4	6,840	
5	6,836	
6	6,831	
7	6,844	
8	6,835	
9	6,832	
10	6,836	
11	6,841	
12	6,844	
13	6,846	
14	6,843	
15	6,836	
16	6,832	
17	6,860	
18	6,858	
19	6,845	
20	6,841	
21	6,835	
22	6,836	
23	6,842	
24	6,844	
25	6,847	
26	6,842	
27	6,844	
28	6,847	
29	6,842	
30	6,848	
31	6,854	
32	6,859	
33	6,851	
34	6,855	
35	6,860	
36	6,863	
37	6,834	
38	6,843	
39	6,844	
40	6,842	
41	6,839	
42	6,863	
43	6,840	
44	6,846	
45	6,845	
46	6,842	
47	6,839	
48	6,836	
49	6,840	
50	6,843	
Average	6,84	
Cmk	5,86	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700928 | **7004-5626G1**

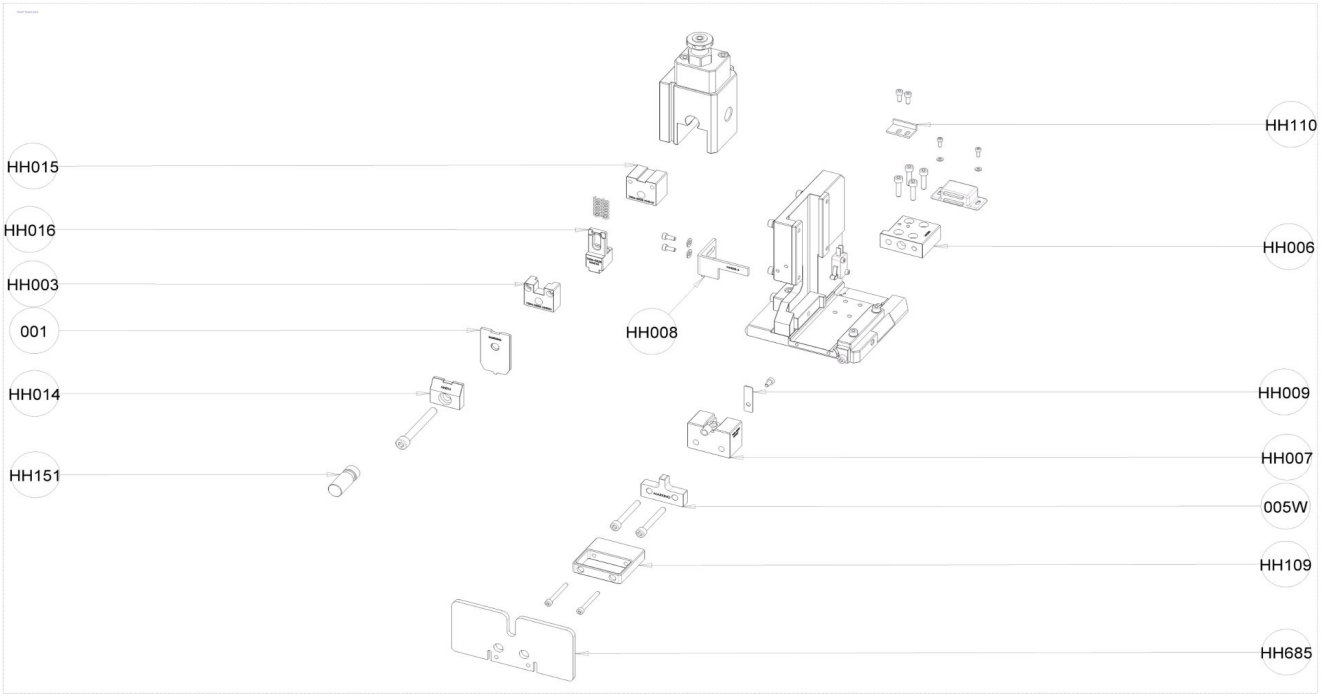

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5626-Z0BW***	WIRE CRIMPER	1
005W	***7004-5626-Z0BA***	WIRE ANVIL	1
HH003	7004-5626 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5626 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7004-5626 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5626 HH015	SPACER B	1
HH016	7004-5626 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1