PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700930

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5624 G1 SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5624-02	*	**ADB**	**YSD-4514127913**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5624-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5624-Z0DA	(N)	7004-5624-Z0DW	(1)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~2.00mm 0~2.00mm	0.41 0		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	- 0.2		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.0mm	0.96		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	2º	0.3		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	3º	0.2		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

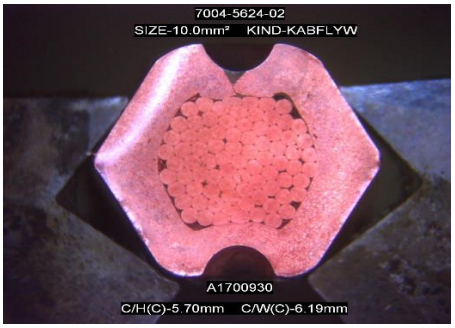2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	5,7	5,71	8,71
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 10.0mm²~10.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 19147	PREPARED (Operator) nº 5061
Date: 2024/dez/17	Date: 2024/dez/17	Date: 2024/dez/17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700930

LOWER WIRE KIND & SIZE

Wire kind:	KABFLYW		
Wire size:	10		mm^2
Nominal Cr. Height:	5,7	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	5,711	
2	5,713	
3	5,714	
4	5,705	
5	5,710	
6	5,716	
7	5,705	
8	5,713	
9	5,714	
10	5,711	
11	5,715	
12	5,716	
13	5,706	
14	5,715	
15	5,717	
16	5,715	
17	5,706	
18	5,717	
19	5,705	
20	5,700	
21	5,709	
22	5,712	
23	5,705	
24	5,700	
25	5,708	
26	5,717	
27	5,698	
28	5,713	
29	5,719	
30	5,721	
31	5,704	
32	5,706	
33	5,718	
34	5,713	
35	5,695	
36	5,717	
37	5,699	
38	5,701	
39	5,718	
40	5,697	
41	5,713	
42	5,713	
43	5,699	
44	5,717	
45	5,703	
46	5,708	
47	5,696	
48	5,718	
49	5,700	
50	5,697	
Average	5,71	
Cmk	8,71	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700930 | **7004-5624G1**

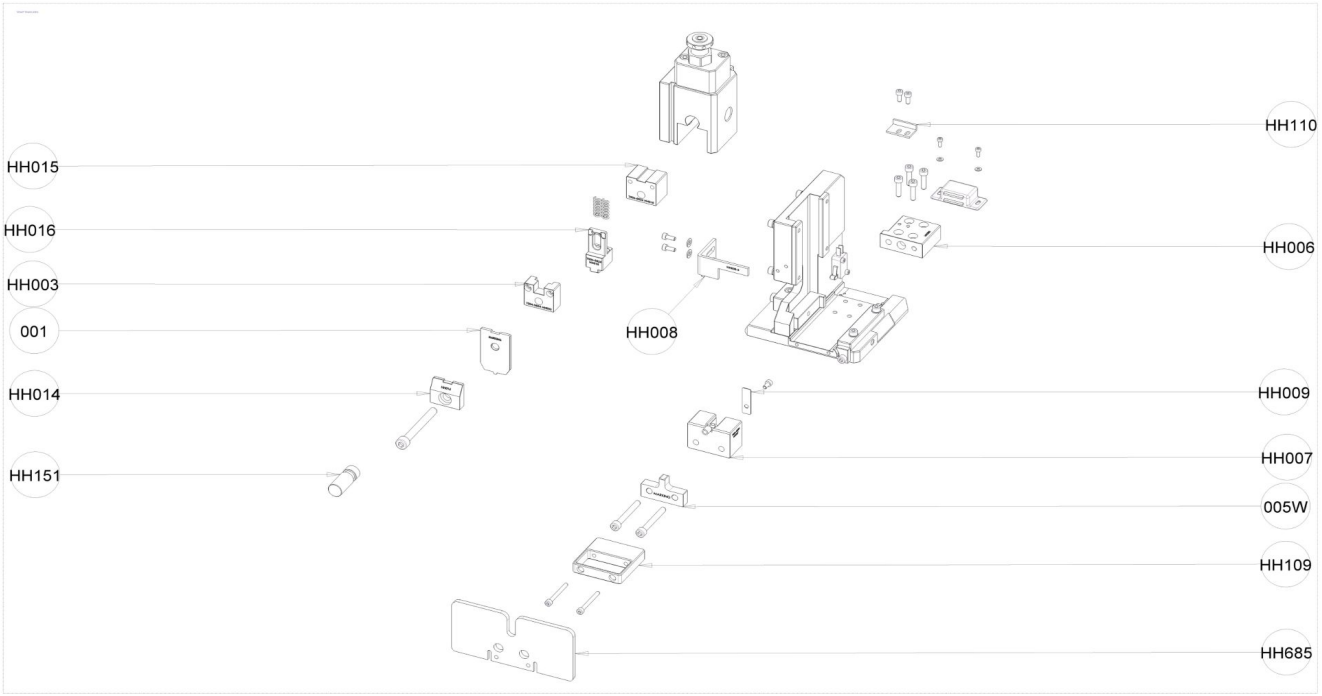

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5624-Z0DW***	WIRE CRIMPER	1
005W	***7004-5624-Z0DA***	WIRE ANVIL	1
HH003	7004-5624 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5624 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7004-5624 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5624 HH015	SPACER B	1
HH016	7004-5624 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1