PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700931

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5624 G1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5624-02	*	**ADB**	**YSD-4514127913**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5624-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5624-Z0DA	(N)	7004-5624-Z0DW	(1)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~2.00mm 0~2.00mm	0.52 0		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	1.1 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.0mm	0.83		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	2º	0.3		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	3º	0.1		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

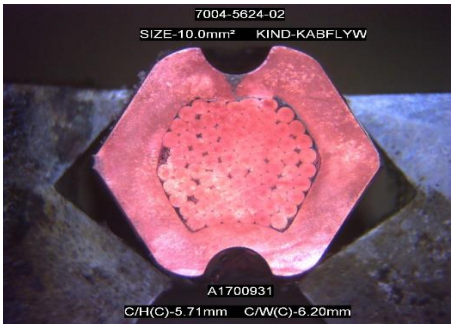2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	5,7	5,70	8,36
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 10.0mm²~10.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 19147	PREPARED (Operator) nº 5061
Date: 2024/dez/17	Date: 2024/dez/17	Date: 2024/dez/17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700931

LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 10 mm²

Nominal Cr. Height:	5,7	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	5,705	
2	5,699	
3	5,713	
4	5,714	
5	5,692	
6	5,696	
7	5,704	
8	5,691	
9	5,687	
10	5,697	
11	5,714	
12	5,708	
13	5,693	
14	5,691	
15	5,706	
16	5,708	
17	5,702	
18	5,701	
19	5,708	
20	5,693	
21	5,709	
22	5,694	
23	5,707	
24	5,693	
25	5,705	
26	5,711	
27	5,695	
28	5,703	
29	5,696	
30	5,694	
31	5,708	
32	5,699	
33	5,707	
34	5,697	
35	5,694	
36	5,708	
37	5,691	
38	5,705	
39	5,694	
40	5,712	
41	5,693	
42	5,713	
43	5,692	
44	5,706	
45	5,704	
46	5,690	
47	5,711	
48	5,699	
49	5,687	
50	5,710	
Average	5,70	
Cmk	8,36	

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700931	7004-5624G1

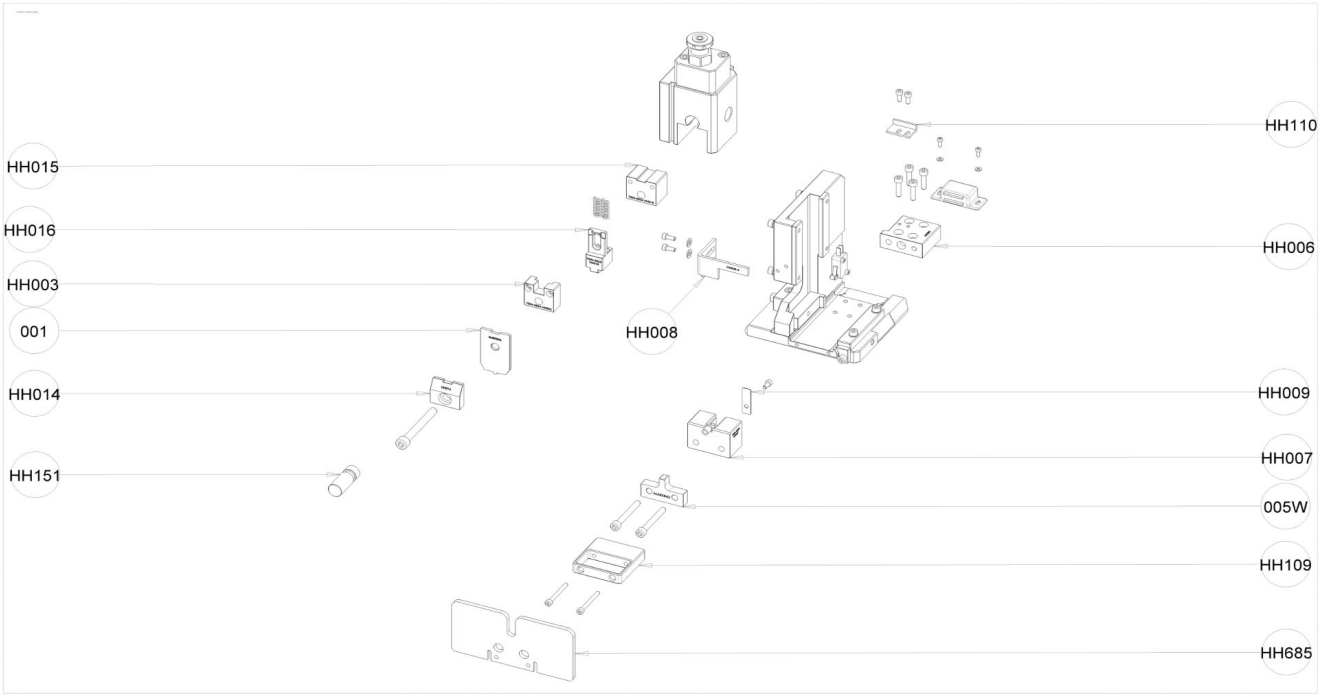

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5624-Z0DW***	WIRE CRIMPER	1
005W	***7004-5624-Z0DA***	WIRE ANVIL	1
HH003	7004-5624 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5624 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7004-5624 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5624 HH015	SPACER B	1
HH016	7004-5624 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1