PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700932

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5621 G1 SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5621-02	*	**ADB**	**YSD 4514127913**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5621-02			

Anvil		Wire Crimper		Insulation Crimper	
7004-5621-ZODA	(N)	7004-5621ZODW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~1.50mm 0.00~1.50mm	0.30 0.56		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**	-	-		The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	0.7 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0~2.00mm	0.85		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.7		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	2º	0.2		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

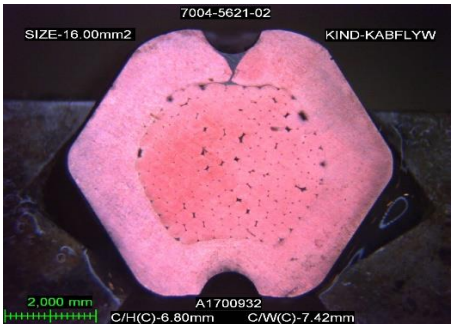2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	6,8	6,81	9,78
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-16.00~16.00mm^2

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2024/dez/09	Date: 2024/dez/06	Date: 2024/dez/06

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700932

LOWER WIRE KIND & SIZE

Wire kind:	KABFLYW		
Wire size:	16		mm^2
Nominal Cr. Height:	6,8	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	6,811	
2	6,815	
3	6,820	
4	6,824	
5	6,815	
6	6,810	
7	6,802	
8	6,804	
9	6,807	
10	6,801	
11	6,802	
12	6,805	
13	6,812	
14	6,800	
15	6,798	
16	6,802	
17	6,805	
18	6,808	
19	6,803	
20	6,806	
21	6,807	
22	6,798	
23	6,795	
24	6,798	
25	6,802	
26	6,793	
27	6,807	
28	6,804	
29	6,800	
30	6,806	
31	6,813	
32	6,812	
33	6,802	
34	6,802	
35	6,805	
36	6,802	
37	6,800	
38	6,804	
39	6,810	
40	6,813	
41	6,813	
42	6,804	
43	6,802	
44	6,799	
45	6,800	
46	6,815	
47	6,818	
48	6,814	
49	6,809	
50	6,801	
Average	6,81	
Cmk	9,78	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700932	7004-5621G1

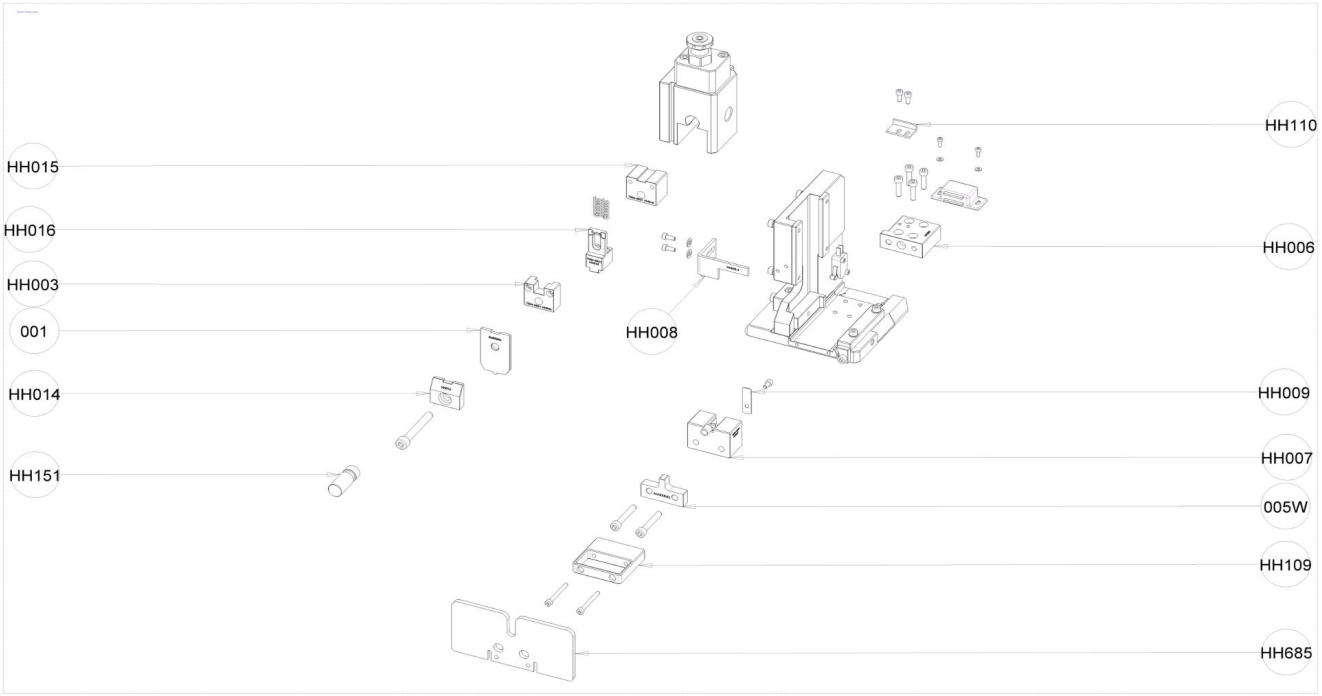

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5621-Z0DW***	WIRE CRIMPER	1
005W	***7004-5621-Z0DA***	WIRE ANVIL	1
HH003	7004-5621 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5621 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7004-5621 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5621 HH015	SPACER B	1
HH016	7004-5621 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1