PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700933

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5621 G1 SEQUENCE Nº 9








Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5621-02	*	**ADB**	**YSD 4514127913**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5621-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5621-ZODA	(N)	7004-5621ZODW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	NA	0~1.50mm 0.00~1.50mm	0.17 0.46		The Bell Mouth is within the spec.**(*)**	O
	Not found any Bell Mouth in the insulation area.	NA	-	-		The dimension of the cutting carrier is within the spec.**(*)**	NA
	The lance height and shape are not deformed.	NA	3º 3º	0.5 -		Bend up and Bend down are within the criteria**(*)**	O
	Not found any burr in the cutting carrier.	NA	0~2.00mm	0.92		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.2		The terminal is not bent sideway, look-king from the top**(*)**	O
	The wire barrel is free from major burrs.	O	2º	0.3		The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

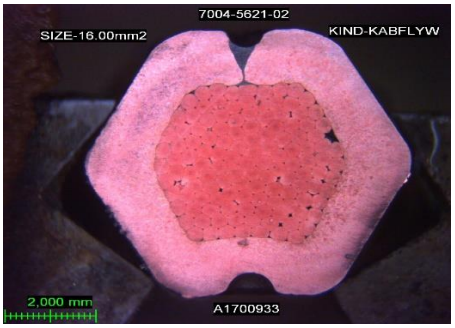2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	6,8	6,80	8,99
	+/-**0.2**		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-**NA**		

REMARKS:

Aplicable wire range-16.00~16.00mm^2

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2024/dez/09	Date: 2024/dez/06	Date: 2024/dez/06

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700933

LOWER WIRE KIND & SIZE

Wire kind: KABFLYW

Wire size: 16 mm²

Nominal Cr. Height:	6,8	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	6,806	
2	6,797	
3	6,798	
4	6,799	
5	6,809	
6	6,803	
7	6,796	
8	6,796	
9	6,801	
10	6,797	
11	6,793	
12	6,788	
13	6,790	
14	6,793	
15	6,801	
16	6,799	
17	6,793	
18	6,795	
19	6,799	
20	6,804	
21	6,812	
22	6,808	
23	6,802	
24	6,797	
25	6,795	
26	6,795	
27	6,796	
28	6,803	
29	6,811	
30	6,815	
31	6,809	
32	6,804	
33	6,801	
34	6,797	
35	6,799	
36	6,807	
37	6,810	
38	6,822	
39	6,821	
40	6,813	
41	6,804	
42	6,808	
43	6,806	
44	6,801	
45	6,798	
46	6,797	
47	6,797	
48	6,798	
49	6,804	
50	6,807	
Average	6,80	
Cmk	8,99	

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700933	7004-5621G1

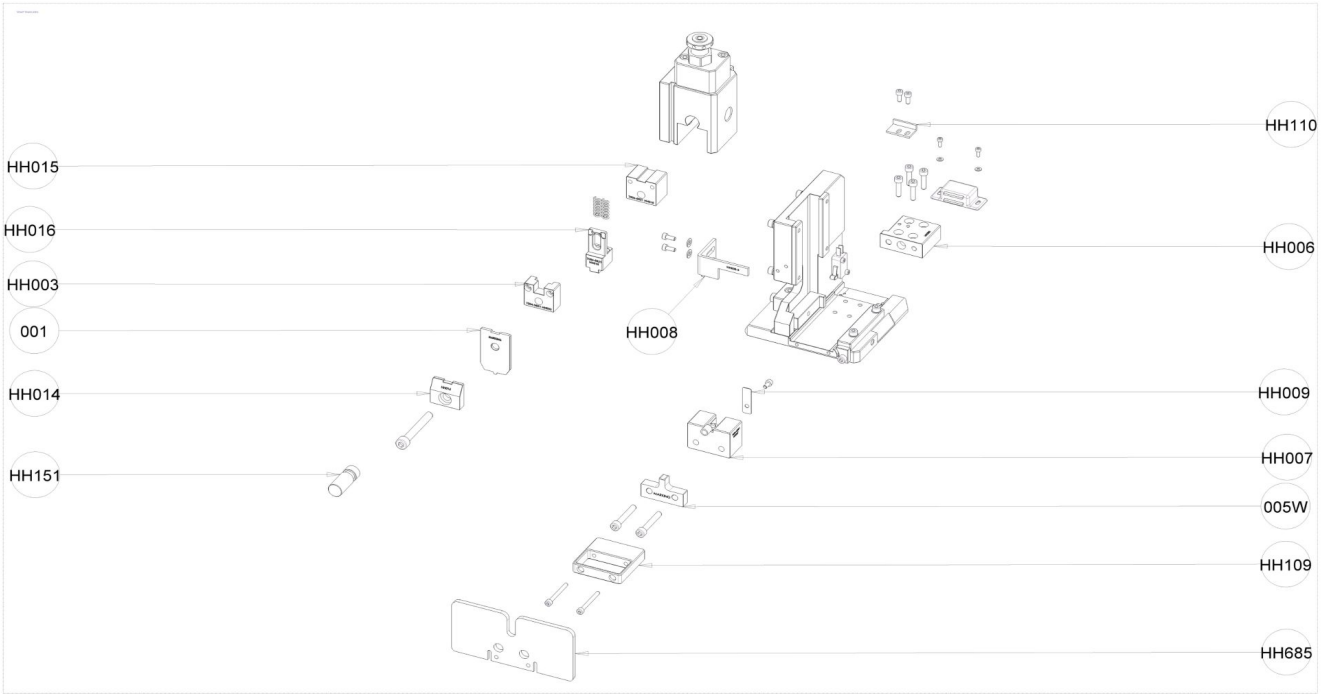

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5621-Z0DW***	WIRE CRIMPER	1
005W	***7004-5621-Z0DA***	WIRE ANVIL	1
HH003	7004-5621 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5621 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7004-5621 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5621 HH015	SPACER B	1
HH016	7004-5621 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1