PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700934

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5622 G1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5622-02	*	**ADB**	**YSD-4514127913**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5622-02							

Anvil		Wire Crimper		Insulation Crimper	
7004-5622-Z0DA	(N)	7004-5622-Z0DW	(1)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	


1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
						O - ok X - ng NA - not aplicable	
	The two sides of the insulation grips are in the correct position.	NA				The Bell Mouth is within the spec.(*)	NA
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.(*)	NA
	The lance height and shape are not deformed.	NA	3º 3º	- 0.3		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	NA	0~2.00mm	0.43		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.1		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O				The body of the terminal is not twisted(*)	NA

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

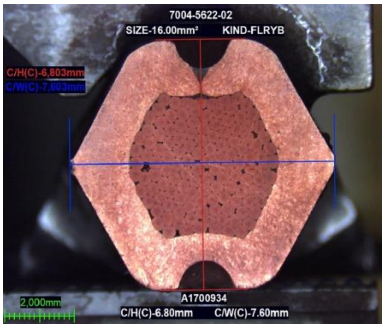2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	6,8	6,80	15,38
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 16.00mm²~16.00mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 19147	PREPARED (Operator) nº 2988
Date: 2024/dez/17	Date: 2024/dez/17	Date: 2024/dez/17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700934

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 16 mm²

Nominal Cr. Height:	6,8	NA	mm
+/-	0,2	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	6,805	
2	6,797	
3	6,803	
4	6,806	
5	6,800	
6	6,807	
7	6,800	
8	6,802	
9	6,806	
10	6,801	
11	6,801	
12	6,804	
13	6,808	
14	6,811	
15	6,799	
16	6,806	
17	6,807	
18	6,799	
19	6,795	
20	6,805	
21	6,807	
22	6,807	
23	6,799	
24	6,805	
25	6,807	
26	6,807	
27	6,796	
28	6,795	
29	6,807	
30	6,807	
31	6,798	
32	6,799	
33	6,810	
34	6,807	
35	6,801	
36	6,810	
37	6,804	
38	6,802	
39	6,809	
40	6,806	
41	6,802	
42	6,807	
43	6,809	
44	6,810	
45	6,801	
46	6,799	
47	6,804	
48	6,809	
49	6,806	
50	6,801	
Average	6,80	
Cmk	15,38	

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700934 | **7004-5622G1**

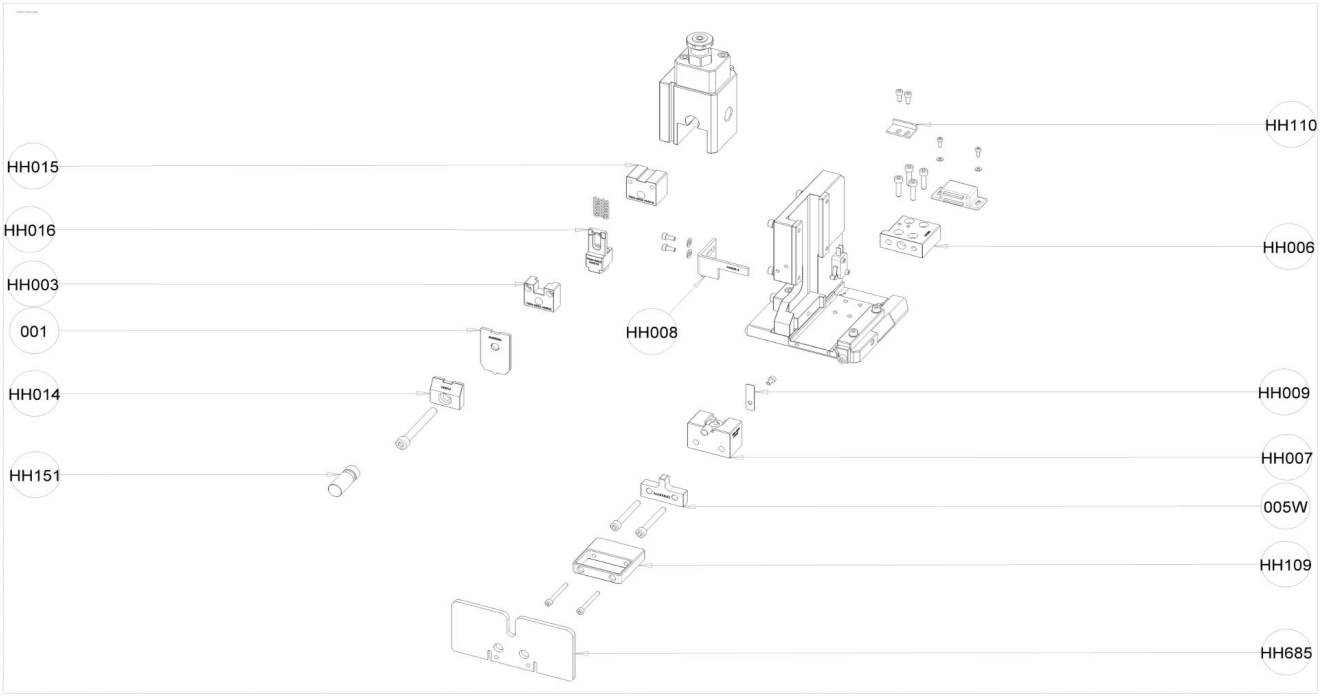

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5622-Z0DW***	WIRE CRIMPER	1
005W	***7004-5622-Z0DA***	WIRE ANVIL	1
HH003	7004-5622 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5622 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	7004-5622 HH009	TERMINAL GUIDE	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5622 HH015	SPACER B	1
HH016	7004-5622 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1