PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700951

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7004-5691 G1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5691-02	*	**ADB**	**YSD-4514174085**	**MLER TRUCK BEV**

Applicable Terminals for this Tool:

7004-5691-02			

Anvil		Wire Crimper		Insulation Crimper	
7004-5691-Z0DA	(N)	7004-5691-Z0DW	(N)	NA	
CW (c)	*CW (i)*	*CW*		*CW*	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	**NA**	0~1.50mm 0~1.50mm	0.83 0.72		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**NA**				The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	The lance height and shape are not deformed.	**NA**	3º 3º	0.9 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**NA**	0.10~1.50mm	0.75		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.3		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**				The body of the terminal is not twisted**(*)**	**NA**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,4	2,41	2,42
	+/-**0.05**		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-**NA**		

REMARKS:

Aplicable wire range 2.50mm²~2.50mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2025/abr/17	Date: 2025/abr/08	Date: 2025/abr/08

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700951

LOWER WIRE KIND & SIZE

Wire kind:	FLRYA		
Wire size:	2,5		mm^2
Nominal Cr. Height:	2,4	NA	mm
+/-	0,05	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	2,412	
2	2,405	
3	2,411	
4	2,410	
5	2,402	
6	2,398	
7	2,393	
8	2,400	
9	2,405	
10	2,416	
11	2,420	
12	2,411	
13	2,402	
14	2,410	
15	2,401	
16	2,401	
17	2,414	
18	2,411	
19	2,401	
20	2,399	
21	2,412	
22	2,398	
23	2,406	
24	2,414	
25	2,394	
26	2,399	
27	2,409	
28	2,406	
29	2,401	
30	2,409	
31	2,403	
32	2,398	
33	2,405	
34	2,415	
35	2,401	
36	2,410	
37	2,401	
38	2,402	
39	2,398	
40	2,411	
41	2,399	
42	2,405	
43	2,404	
44	2,397	
45	2,406	
46	2,397	
47	2,411	
48	2,403	
49	2,410	
50	2,404	
Average	2,41	
Cmk	2,42	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

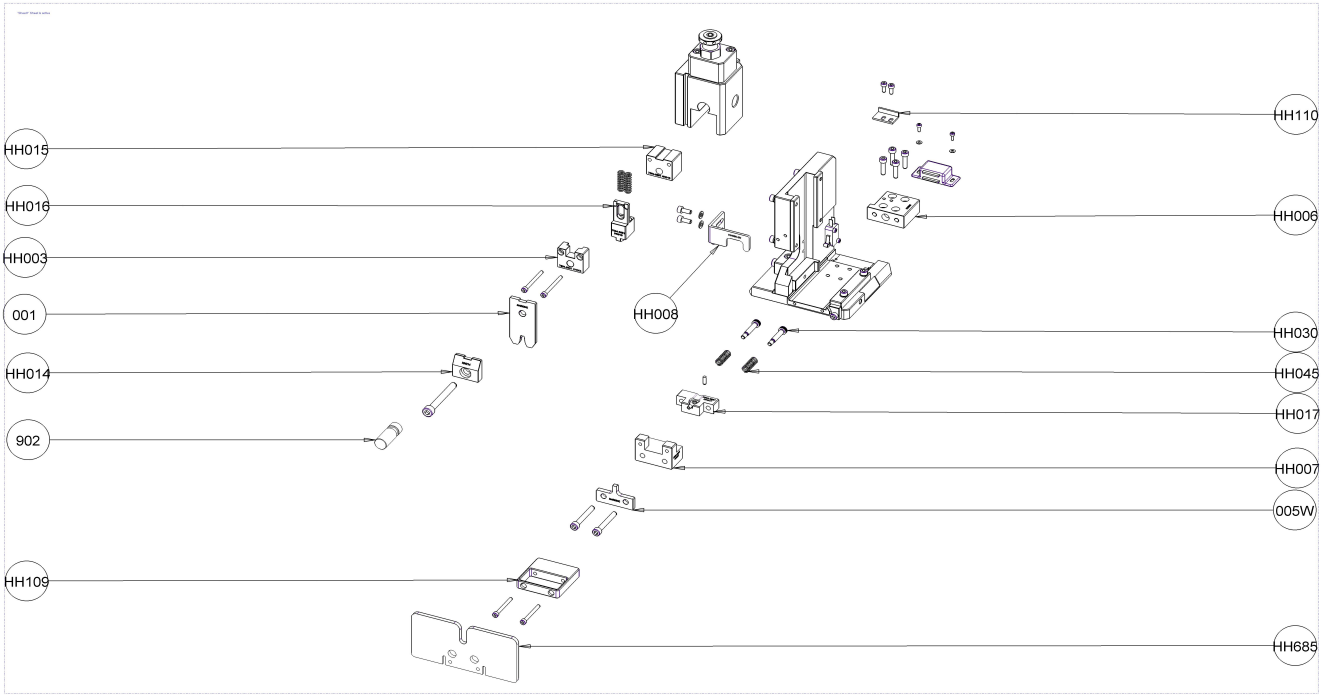
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700951 | **7004-5691G1**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5691-Z0DW***	WIRE CRIMPER	1
005W	***7004-5691-Z0DA***	WIRE ANVIL	1
HH003	7004-5691 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5691 HH007	TERMINAL HOLDER	1
HH008	HH008-3U	STRIPPER	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5691 HH015	SPACER B	1
HH016	7004-5691 HH016	HOLD DOWN	1
HH017	7004-5691 HH017	TERMINAL HOLDER COVER	1
HH030	Ø6 x 25 (ISO 7379)	SHOULDER SCREW	2
HH045	48A013010	SPRING	2
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1