PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700953

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045729 G1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5729-02	*	ADB	4514194088	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7004-5729-02				

Anvil		Wire Crimper		Insulation Crimper	
7004-5729-Z0DA	(N)	7004-5729-Z0DW	(N)	NA	
CW (c)	CW (i)	CW		CW	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	NA	0 - 2 mm 0 - 2 mm	0.36 0.18		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.	NA
	The lance height and shape are not deformed.	NA	0 - 3 ° 0 - 3 °	0.6		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	NA	0 - 2 mm	0.66		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O				The body of the terminal is not twisted.	NA


O - ok X - ng NA - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

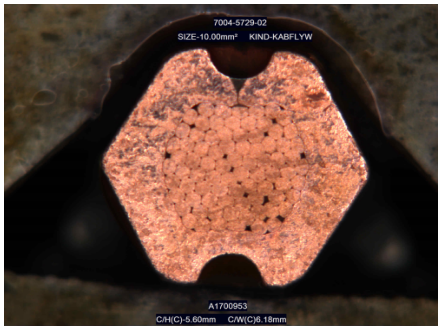2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	5.6	5.61	3.93
	+/- **0.1**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Aplicable wire range 10.0mm²~10.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 09/06/2025	Date: 09/06/2025	Date: 09/06/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº

A1700953

LOWER WIRE KIND & SIZE

C/W(l): mm

Wire kind: KABFLYW

Wire size: 10.0 mm²

Nominal Cr. Height:	5.6	NA	mm
+/-	0.1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	5.615	
2	5.621	
3	5.621	
4	5.613	
5	5.607	
6	5.600	
7	5.598	
8	5.599	
9	5.609	
10	5.621	
11	5.616	
12	5.600	
13	5.597	
14	5.595	
15	5.603	
16	5.611	
17	5.616	
18	5.598	
19	5.603	
20	5.611	
21	5.606	
22	5.600	
23	5.606	
24	5.616	
25	5.619	
26	5.605	
27	5.596	
28	5.593	
29	5.601	
30	5.608	
31	5.612	
32	5.601	
33	5.608	
34	5.613	
35	5.600	
36	5.596	
37	5.610	
38	5.614	
39	5.605	
40	5.616	
41	5.603	
42	5.616	
43	5.617	
44	5.619	
45	5.601	
46	5.612	
47	5.606	
48	5.602	
49	5.614	
50	5.616	
Average	5.61	
Cmk	3.93	

UPPER WIRE KIND & SIZE

C/W(l): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700953 | **7004-5729G1**

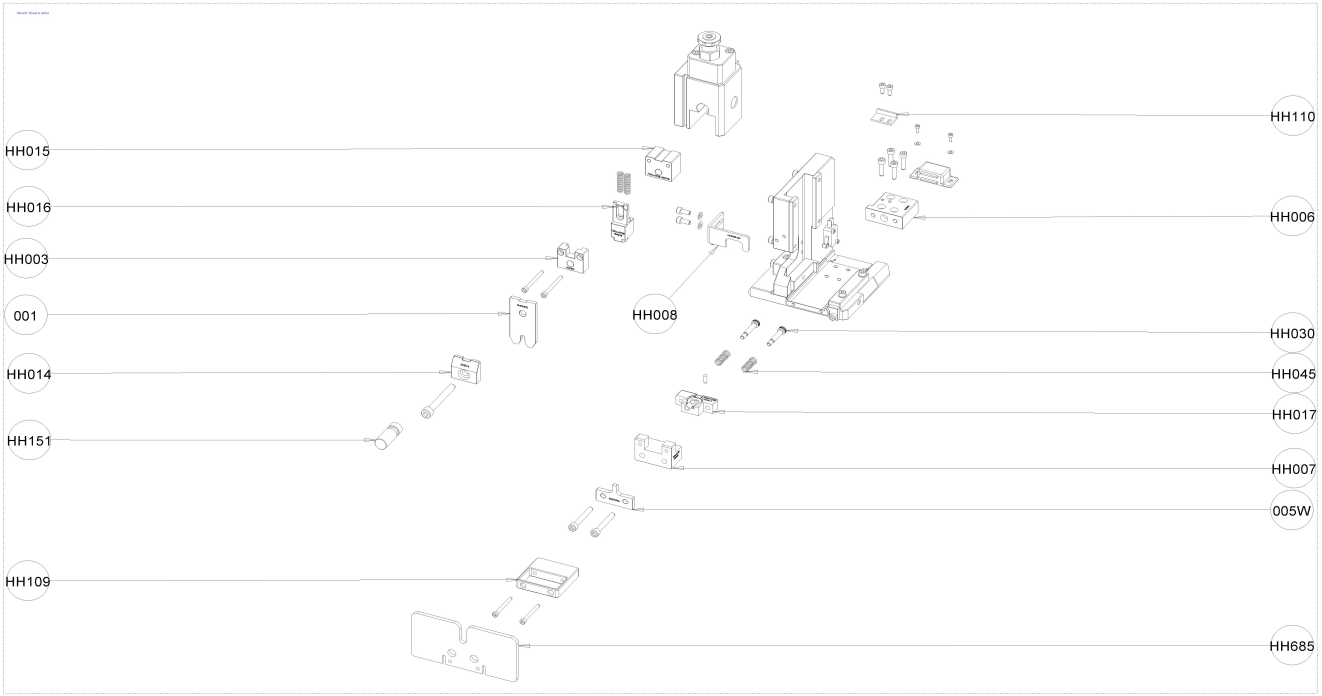

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5729-Z0DW***	WIRE CRIMPER	1
005W	***7004-5729-Z0DA***	WIRE ANVIL	1
HH003	HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5729 HH007	TERMINAL HOLDER	1
HH008	HH008-3U	STRIPPER	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5729 HH015	SPACER B	1
HH016	7004-5729 HH016	HOLD DOWN	1
HH017	7004-5729 HH017	TERMINAL HOLDER COVER	1
HH030	Ø6 x 25 (ISO 7379)	SHOULDER SCREW	2
HH045	48A013010	SPRING	2
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1