PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700957

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045731 G1 SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5731-02	*	ADB	4514194088	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7004-5731-02				

Anvil		Wire Crimper		Insulation Crimper	
7004-5731-Z0DA	(N)	7004-5731-Z0DW	(N)	NA	(-)
CW (c)	CW (i)	CW		CW	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	NA	0 - 2 mm 0 - 2 mm	0.63 0.25		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.	NA
	The lance height and shape are not deformed.	NA	0 - 3 ° 0 - 3 °	0.2		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	NA	0 - 2 mm	0.55		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O				The body of the terminal is not twisted.	NA


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

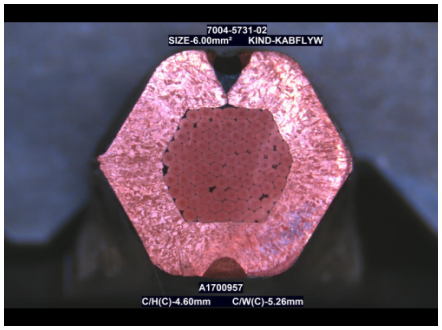

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	4.6	4.61	7.89
	+/- **0.2**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range 6.00mm²~6.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 18/06/2025	Date: 17/06/2025	Date: 17/06/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
A1700957

LOWER WIRE KIND & SIZE

C/W(l): mm

Wire kind: KABFLYW

Wire size: 6.00 mm²

Nominal Cr. Height:	4.6	NA	mm
+/-	0.2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	4.608	
2	4.617	
3	4.611	
4	4.606	
5	4.616	
6	4.620	
7	4.610	
8	4.609	
9	4.619	
10	4.608	
11	4.611	
12	4.619	
13	4.622	
14	4.609	
15	4.622	
16	4.623	
17	4.617	
18	4.605	
19	4.618	
20	4.610	
21	4.608	
22	4.616	
23	4.623	
24	4.620	
25	4.609	
26	4.604	
27	4.601	
28	4.612	
29	4.620	
30	4.612	
31	4.604	
32	4.600	
33	4.596	
34	4.594	
35	4.612	
36	4.613	
37	4.614	
38	4.618	
39	4.620	
40	4.600	
41	4.597	
42	4.597	
43	4.618	
44	4.619	
45	4.621	
46	4.603	
47	4.599	
48	4.614	
49	4.619	
50	4.606	
Average	4.61	
Cmk	7.89	

UPPER WIRE KIND & SIZE

C/W(l): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700957 | **7004-5731G1**

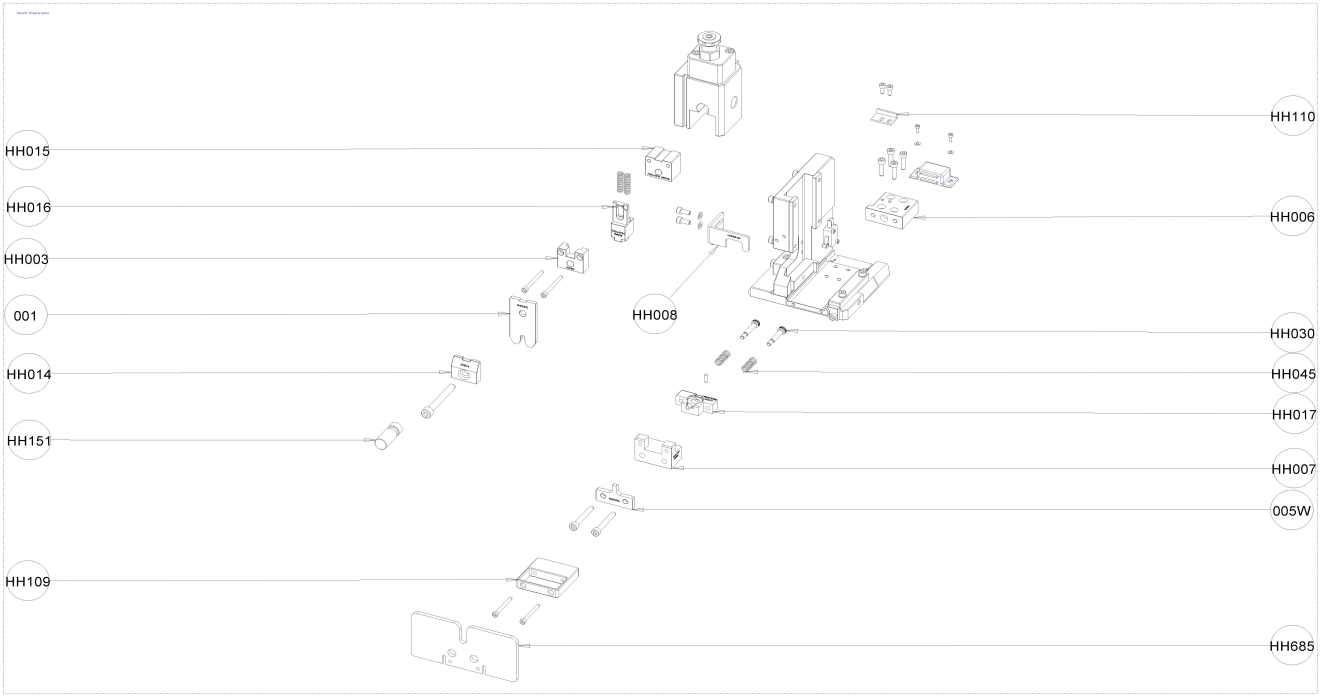

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5731-Z0DW***	WIRE CRIMPER	1
005W	***7004-5731-Z0DA***	WIRE ANVIL	1
HH003	HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5731 HH007	TERMINAL HOLDER	1
HH008	HH008-3U	STRIPPER	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5731 HH015	SPACER B	1
HH016	7004-5731 HH016	HOLD DOWN	1
HH017	7004-5731 HH017	TERMINAL HOLDER COVER	1
HH030	Ø6 x 25 (ISO 7379)	SHOULDER SCREW	2
HH045	48A013010	SPRING	2
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1