PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700958

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045730 G1 SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5730-02	*	ADB	4514194088	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7004-5730-02									

Anvil					Wire Crimper			Insulation Crimper		
7004-5730-Z0DA				(N)	7004-5730Z0DW		(N)	NA		(N)
CW (c)	NA	*CW (i)*	NA		*CW*	NA		*CW*	NA	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	NA	0 - 2 mm 0 - 2 mm	0.36 0.32		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.	NA
	The lance height and shape are not deformed.	NA	0 - 3 ° 0 - 3 °	0.4		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	NA	0 - 2 mm	0.62		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.8		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O				The body of the terminal is not twisted.	NA


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

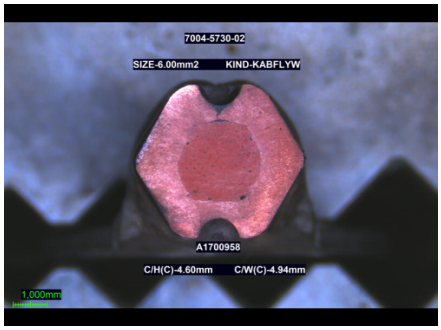2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	4.6	4.61	14.40
	+/- **0.2**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range-6.00~6.00mm2

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 18/06/2025	Date: 18/06/2025	Date: 18/06/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700958

LOWER WIRE KIND & SIZE

C/W(I): mm

Wire kind: KABFLYW

Wire size: 6.00 mm²

Nominal Cr. Height:	4.6	NA	mm
+/-	0.2	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	4.609	
2	4.615	
3	4.609	
4	4.607	
5	4.610	
6	4.618	
7	4.610	
8	4.606	
9	4.608	
10	4.616	
11	4.609	
12	4.604	
13	4.610	
14	4.614	
15	4.612	
16	4.608	
17	4.604	
18	4.609	
19	4.611	
20	4.614	
21	4.610	
22	4.607	
23	4.604	
24	4.605	
25	4.607	
26	4.609	
27	4.605	
28	4.602	
29	4.606	
30	4.613	
31	4.615	
32	4.610	
33	4.606	
34	4.601	
35	4.608	
36	4.612	
37	4.617	
38	4.610	
39	4.606	
40	4.602	
41	4.603	
42	4.615	
43	4.617	
44	4.614	
45	4.608	
46	4.608	
47	4.614	
48	4.617	
49	4.614	
50	4.615	
Average	4.61	
Cmk	14.40	

UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700958 | **7004-5730G1**

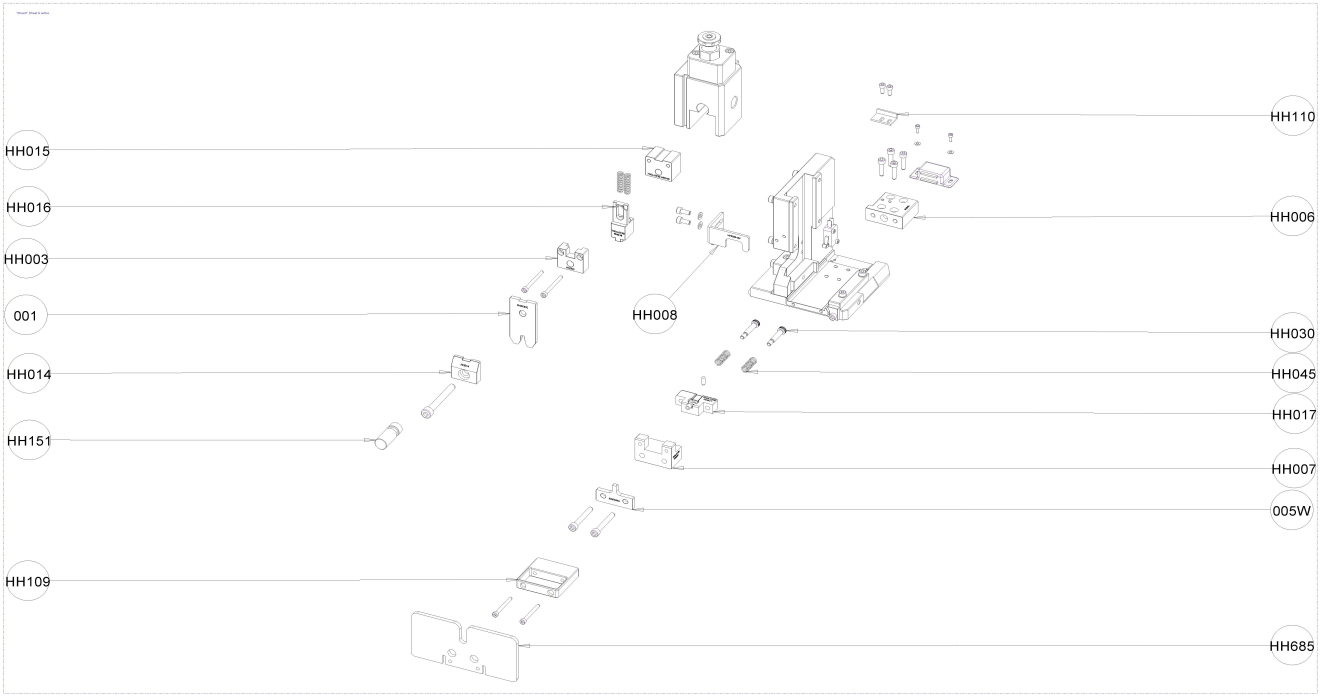

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5730-Z0DW***	WIRE CRIMPER	1
005W	***7004-5730-Z0DA***	WIRE ANVIL	1
HH003	HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5730 HH007	TERMINAL HOLDER	1
HH008	HH008-3U	STRIPPER	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5730 HH015	SPACER B	1
HH016	7004-5730 HH016	HOLD DOWN	1
HH017	7004-5730 HH017	TERMINAL HOLDER COVER	1
HH030	Ø6 x 25 (ISO 7379)	SHOULDER SCREW	2
HH045	48A013010	SPRING	2
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1