PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700980

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045661 G1 SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5661-02	*	ADB	4514310931	DAIMLER TRUCK - XVK81

Applicable Terminals for this Tool:

7004-5661-02					

Anvil		Wire Crimper		Insulation Crimper	
7004-5661-Z0DA	(N)	7004-5661-Z0DW	(N)	NA	
CW (c) 7.00	*CW (i)* NA	*CW* 5.80		*CW* NA	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	NA	0 - 2 mm 0 - 2 mm	0.61		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.	NA
	The lance height and shape are not deformed.	NA	0 - 3 ° 0 - 3 °	1.3		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	NA				The exposed conductor is within the spec.	NA
	Not found any crack in the terminal.	O	0 - 3 °	0.85		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O				The body of the terminal is not twisted.	NA

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

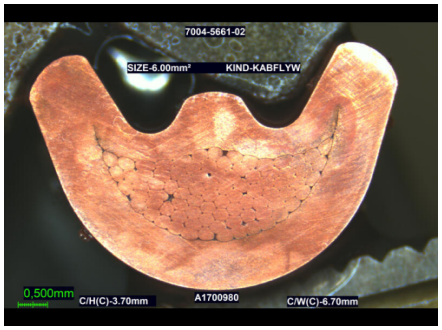

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3.7	3.69	2.58
	+/- **0.05**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range-6.00~6.00mm²

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION

NOT SUITABLE [ ]

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 05/03/2026	Date: 04/03/2026	Date: 03/03/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

A1700980

LOWER WIRE KIND & SIZE

C/W(l): mm

Wire kind: KABFLYW

Wire size: 6.00 mm²

Nominal Cr. Height:	3.7	NA	mm
+/-	0.05	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	3.703	
2	3.692	
3	3.699	
4	3.702	
5	3.696	
6	3.688	
7	3.696	
8	3.703	
9	3.699	
10	3.692	
11	3.692	
12	3.701	
13	3.695	
14	3.686	
15	3.695	
16	3.699	
17	3.686	
18	3.682	
19	3.689	
20	3.700	
21	3.704	
22	3.700	
23	3.692	
24	3.690	
25	3.695	
26	3.701	
27	3.697	
28	3.691	
29	3.693	
30	3.694	
31	3.694	
32	3.689	
33	3.691	
34	3.694	
35	3.691	
36	3.690	
37	3.685	
38	3.689	
39	3.696	
40	3.690	
41	3.687	
42	3.691	
43	3.699	
44	3.703	
45	3.696	
46	3.692	
47	3.688	
48	3.694	
49	3.681	
50	3.686	
Average	3.69	
Cmk	2.58	

UPPER WIRE KIND & SIZE

C/W(l): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700980 | **7004-5661G1**

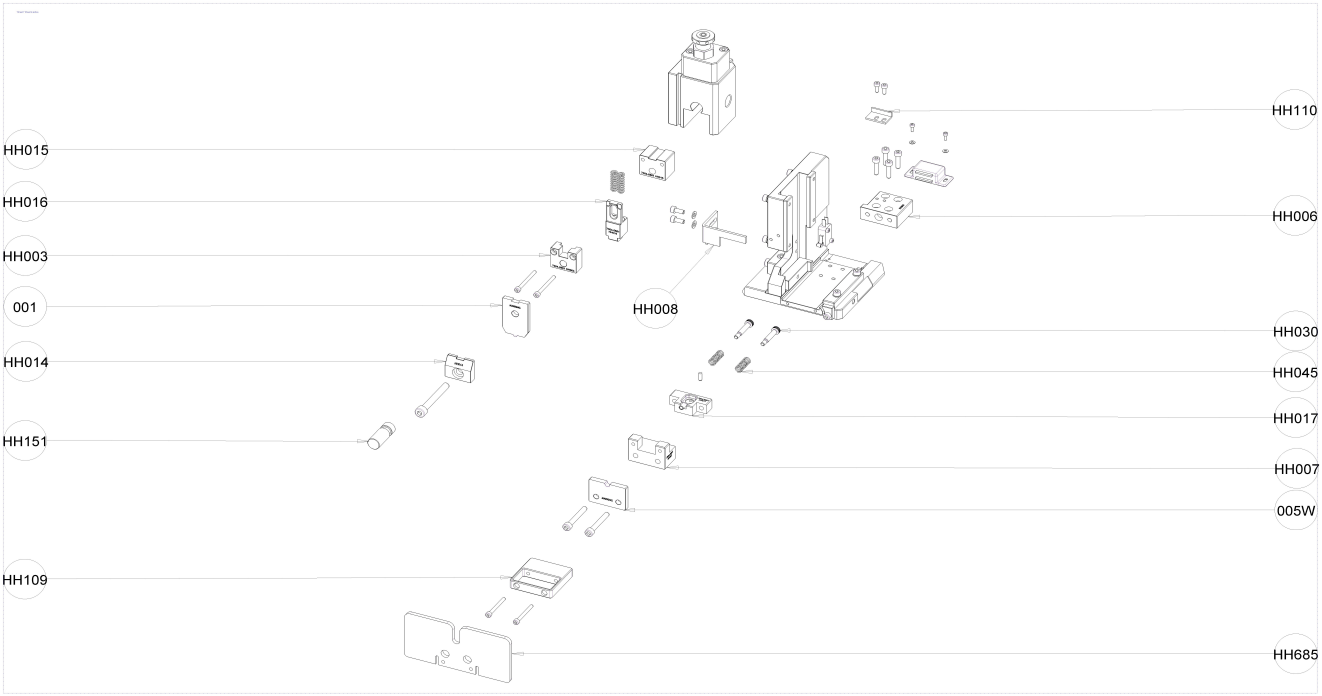

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5661-Z0DW***	WIRE CRIMPER	1
005W	***7004-5661-Z0DA***	WIRE ANVIL	1
HH003	7004-5661 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5661 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5661 HH015	SPACER B	1
HH016	7004-5661 HH016	HOLD DOWN	1
HH017	7004-5661 HH017	TERMINAL HOLDER COVER	1
HH030	Ø6 x 25 (ISO 7379)	SHOULDER SCREW	2
HH045	48A013010	SPRING	2
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1