PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1701007

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70045770 G1 SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7004-5770-02	*	ADB	4514379739	DAIMLER TRUCK - XVK81

Applicable Terminals for this Tool:

7004-5770-02							

Anvil			Wire Crimper			Insulation Crimper		
7004-5770-Z0DA		(N)	7004-5770-Z0DW		(N)	NA		(-)
CW (c)	7.96	CW (i) -	CW	7.96		CW	-	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	NA	0 - 2 mm	0.64		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	NA				The dimension of the cutting carrier is within the spec.	NA
	The lance height and shape are not deformed.	NA	0 - 3 ° 0 - 3 °	0.2		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	NA				The exposed conductor is within the spec.	NA
	Not found any crack in the terminal.	O	0 - 3 °	0.5		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O				The body of the terminal is not twisted.	NA


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

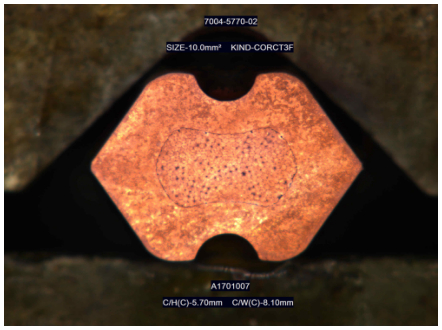

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	5.7	5.70	4.18	mm			
	+/- **0.1**				+/-		

REMARKS:

Applicable wire range 10.0mm²~10.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº5061
Date: 03/07/2026	Date: 02/07/2026	Date: 02/07/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

A1701007

LOWER WIRE KIND & SIZE

C/W(I): mm

Wire kind: CORCT3F

Wire size: 10.0 mm²

Nominal Cr. Height:	5.7	NA	mm
+/-	0.1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	5.700	
2	5.706	
3	5.708	
4	5.704	
5	5.722	
6	5.707	
7	5.697	
8	5.703	
9	5.719	
10	5.703	
11	5.687	
12	5.699	
13	5.705	
14	5.700	
15	5.709	
16	5.712	
17	5.714	
18	5.694	
19	5.712	
20	5.697	
21	5.695	
22	5.709	
23	5.708	
24	5.700	
25	5.709	
26	5.710	
27	5.714	
28	5.717	
29	5.704	
30	5.699	
31	5.696	
32	5.697	
33	5.693	
34	5.696	
35	5.707	
36	5.691	
37	5.705	
38	5.696	
39	5.713	
40	5.696	
41	5.705	
42	5.692	
43	5.703	
44	5.704	
45	5.691	
46	5.706	
47	5.701	
48	5.693	
49	5.698	
50	5.703	
Average	5.70	
Cmk	4.18	

UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk >= 2

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1701007 | **7004-5770G1**

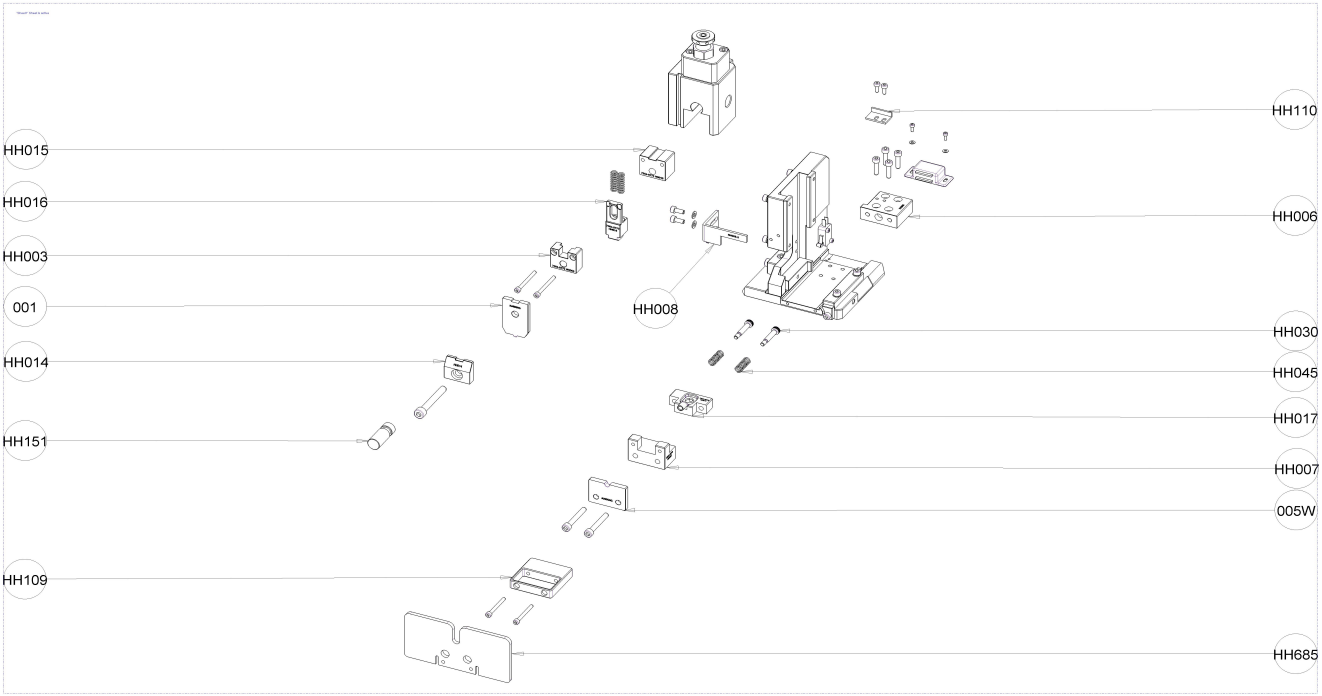

NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7004-5770-Z0DW***	WIRE CRIMPER	1
005W	***7004-5770-Z0DA***	WIRE ANVIL	1
HH003	7004-5770 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7004-5770 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH014	HH014	CRIMPER HOLDER	1
HH015	7004-5770 HH015	SPACER B	1
HH016	7004-5770 HH016	HOLD DOWN	1
HH017	7004-5770 HH017	TERMINAL HOLDER COVER	1
HH030	Ø6 x 25 (ISO 7379)	SHOULDER SCREW	2
HH045	48A13010	SPRING	2
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HH151	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1