QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RFY0118-JSN		F 22104	
	Cod. KIT	K K010274		
ORDER	TERMINALE TO BE CRIMPED			A#
5003787	7116-3449-06			

APPLICATOR SETUP


SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
				Terminal Samples		X		
	Setup	Fixing. Ref.▼		Wire Samples		X		
POSITIVE CAM (Terminal present)		C		Housing Samples				
NEGATIVE CAM (Terminal absent)	X	A		Seal Samples				
		Fixing. Ref.▲		Applicounter			No	
				Mobile Ejector			No	
				Carrier strip to be cut			Yes	
				Conform to Mecal norms			Yes	
				Automatic machine				

FEEDING POINT OF THE TERMINAL				
Hole	Slot	Wire wing	Insulation wing	Other
		X		

	Crimp Height	Pull Force	Section	Photo
C			6,00	X
M				
K			4,00	X

Setup on		
	Mod.	S/N
Press	P107C	42877
Stripper		

Strip lenght = 6,00 (mm)



CRIMPING

WIRE	INSULATION	BARREL
 F	 S	
Profile dimension	Profile dimension	Profile dimension
Wire C. Profile Width (mm.) 4,00 (toll. +) 0,02	Insulation C. Profile Width (mm.) 5,30 (toll. +) 0,02	Barrel C. Profile Width (mm.) (toll. +)

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					HEIGHT ±	Required WIDTH ±	Measured WIDTH		HEIGHT ±	Required WIDTH ±	Measured WIDTH	HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,1						Min. (N.)	C.F.A. (KN.)
5,546 Sez. reale																
6,00 FLRYB	84	0,29	4,10	2,25	2,50		4,12	1,54	4,90		5,42				600	12,38
3,697 Sez. reale																
4,00 KABFLYW	56	0,29	4,20	2,55	2,20		4,09	1,40	4,80		5,42				450	12,43

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
9/7/2012	*Ercole D.*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RFY0118-JSN** | **22104**

	Terminal
	7116-3449-06
Wire Section.	6,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

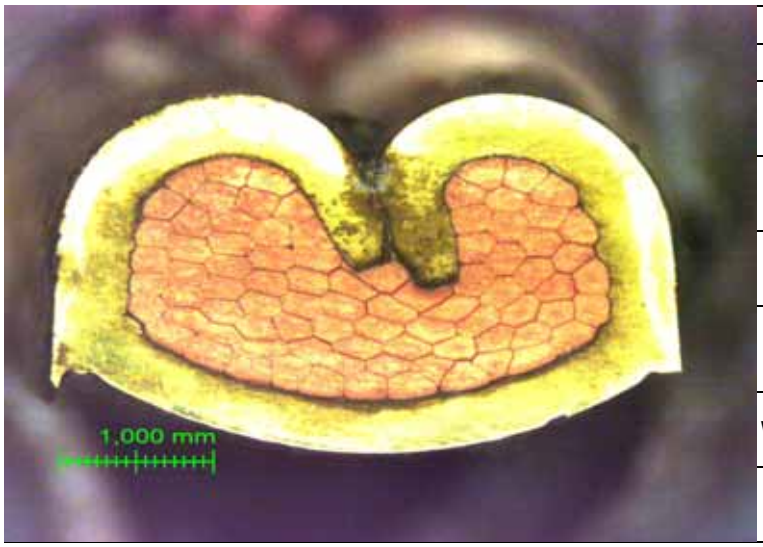

	Terminal
	7116-3449-06
Wire Section.	6,00
CH. (mm.)	2,50
C.W. (mm.)	4,12
Material Compression (%)	23,4
Wire Compression	
Terminal Compression	


	Terminal
	7116-3449-06
Wire Section.	6,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
9/7/2012	*Ercole D.*	*Bruno*	*Zatti*

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RFY0118-JSN** | **22104**

	Terminal
	7116-3449-06
Wire Section.	4,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

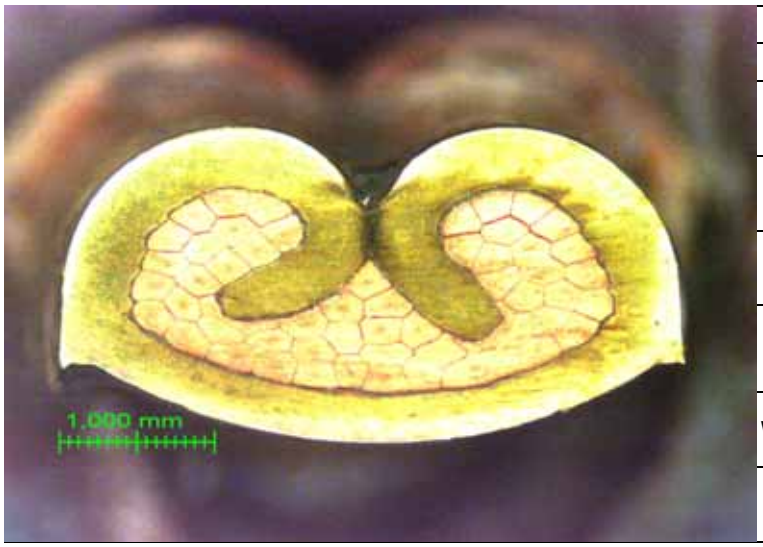

	Terminal
	7116-3449-06
Wire Section.	4,00
CH. (mm.)	2,20
C.W. (mm.)	4,09
Material Compression (%)	21,3
Wire Compression	
Terminal Compression	

	Terminal
	7116-3449-06
Wire Section.	4,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
9/7/2012	*Ercole D.*	*Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST


DATA	09/07/2012
MODELLO	
MODEL	**RFY0118-JSN**
TYPE	
MODELE	
TERMINALE	
TERMINAL	**7116-3449-06**
KONTAKT	
COSSE	
MATRICOLA	
SERIAL NUMBEF	**F 22104**
REGISTRIERNUMMER	
MATRICULE	

CODICE	Qt.	Rif
870550004	1	110
601051006	2	130
600052010	1	150
870620001	1	180
880480008	1	190
871980007	1	200
991320002	1	210
600041106	1	220
630104106	1	230
650231018	1	240
990270004	1	250
991300009	1	260
991310000	1	270
640050020	1	280
901150000	1	290
991330003	1	300
991340002	1	310
991350000	1	330
650242004	2	340
991590000	1	360
600050016	1	370
600050016	2	380
901190003	1	390
600061016	2	470
990400003	1	520
640050020	1	530
640060020	2	550
991290010	1	585
991290010	1	587
600050012	4	590
901120003	1	610
610111308	1	630
991280007	1	640
600050020	2	650
600052016	1	660
901100000	1	670
901170000	1	690
610101005	2	695
600052030	1	710


CODICE	Qt.	Rif
95127 0207	1	001
60006 0040	1	005
90113 0016	1	100
99101 0007	1	120
99101 0031	1	120
95127 0072	1	140
99157 0000	1	142
99058 0000	1	143
90002 0002	1	160
90114 0004	1	170
99017 0000	1	320
90109 0000	1	350
90124 0013	1	430
90125 0002	1	440
90126 0046	1	450
88146 0018	1	455
88146 0019	1	460
60004 0008	4	465
90111 0013	1	480
60004 0008	4	500
90104 0026	1	540
90105 0048	1	560
61010 1003	1	561
62003 1012	1	562
64004 0006	1	563
90107 0138	1	570
60005 0012	2	580
99132 0001	1	620
90018 0005	1	680
90121 0048	1	700
90110 0017	1	702
62006 1016	1	704
61010 1006	1	706
Person. **F_A56-Y**	1	
98146 2068	**1**	**1000**
98145 1892	**1**	**1010**
99144 0139	1	1025
99948 0670	1	1030
60008 1025	1	1050
90133 0102	**1**	**1060**
99150 0700	1	1065
60004 0012	2	1070
90134 0101	**1**	**1100**
90135 0364	**1**	**1110**
90129 0000	1	1120
60005 0022	2	1125
98127 2843	**1**	**1130**
60004 0010	1	1137


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


RFY

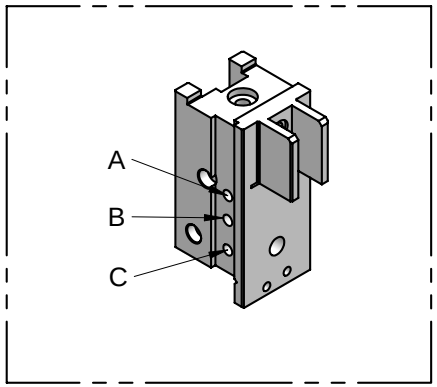



ATTENZIONE: la protezione in gomma (rif. 180) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 180) between the ram and the applicator it must be removed before using.

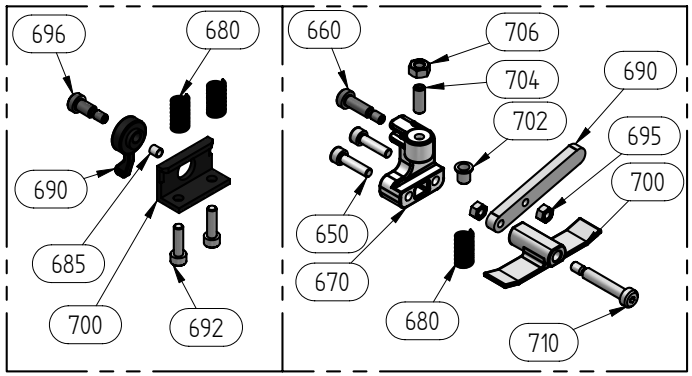



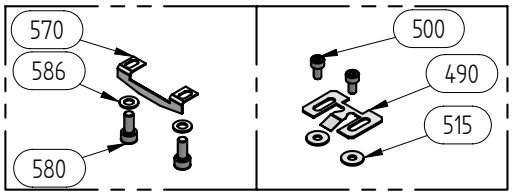

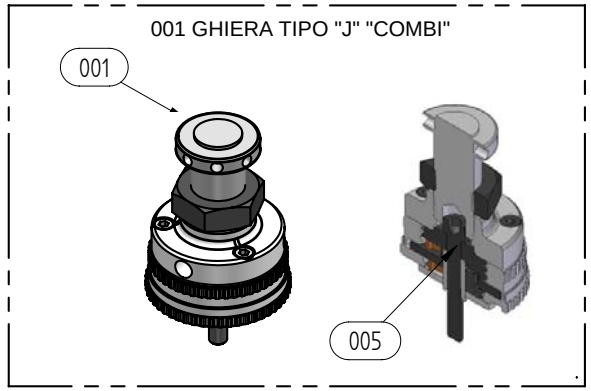

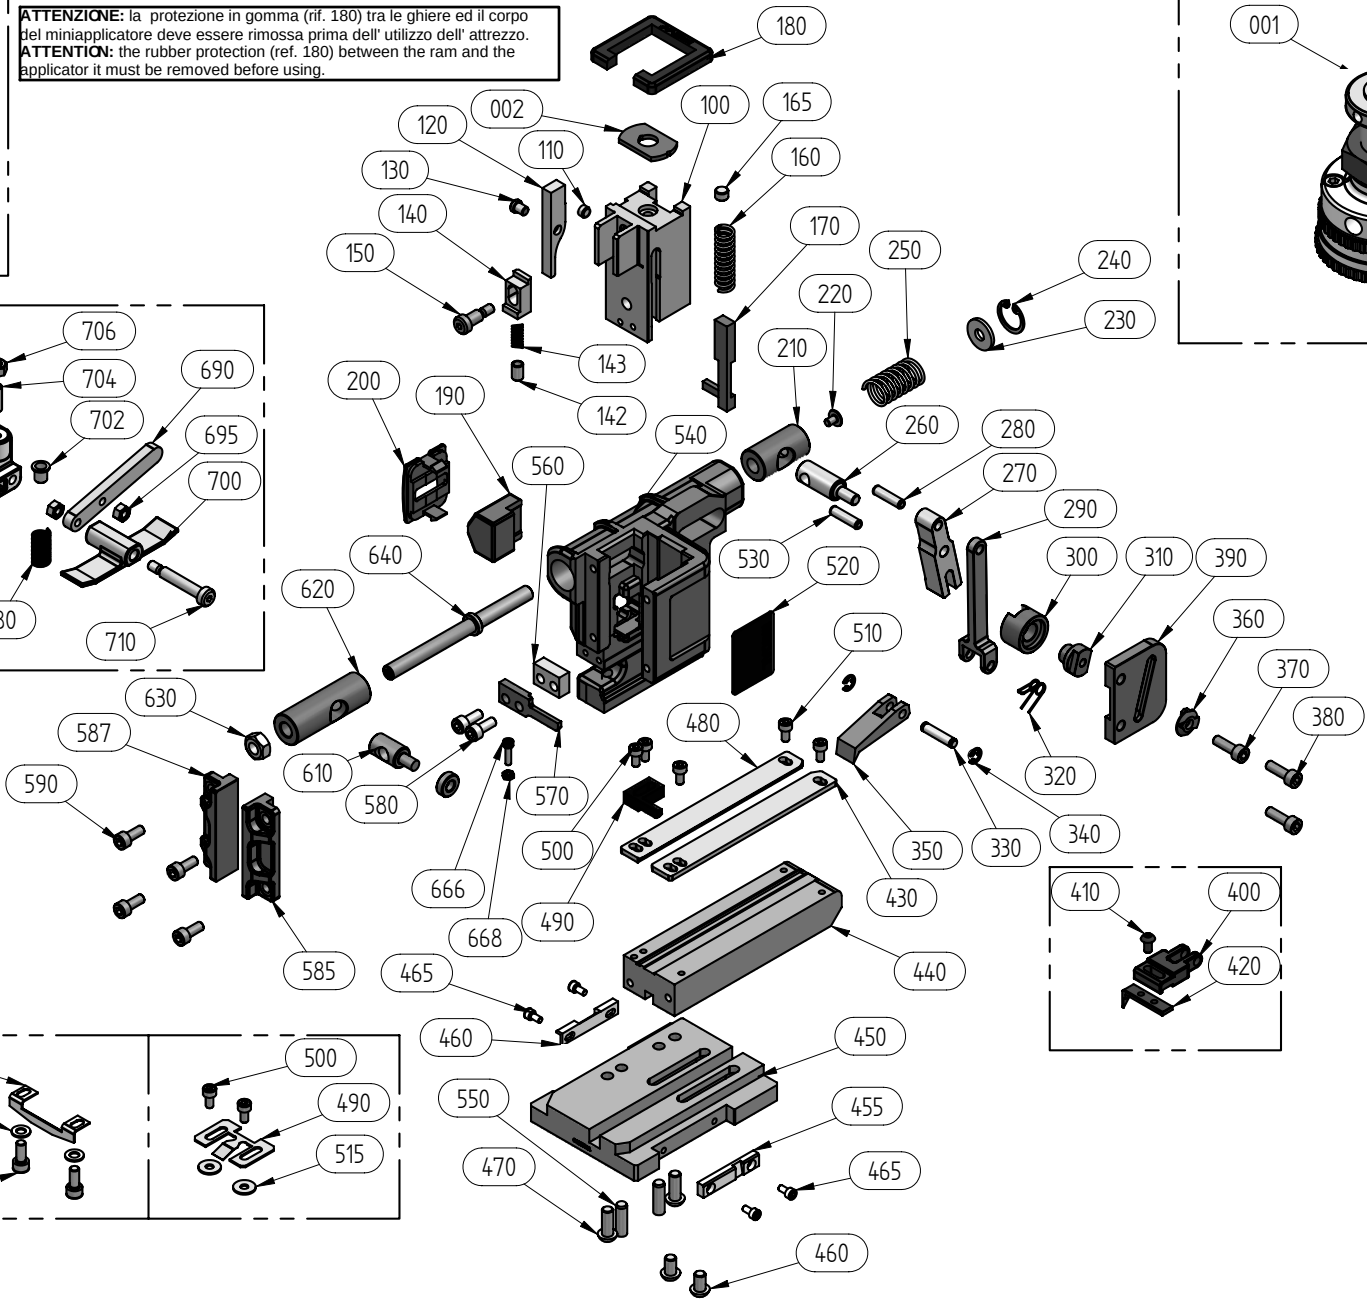

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

F_A56-Y

