PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
F32708

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71155057 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7115-5057-08	*	**MKY6605-J**	**YSD 3500173465**	*






Anvil		
981462919		(NA)
CW (c)	*CW (i)*	



Wire Crimper	
NA	(NA)
CW	

Insulation Crimper	
NA	
CW	

1 - VISUAL CHECK ITEMS

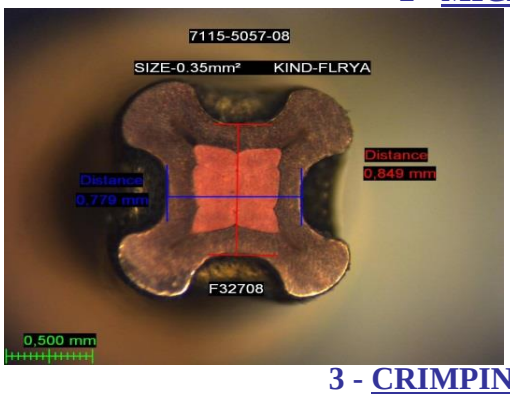
O - ok **X** - ng **NA** - not aplicable

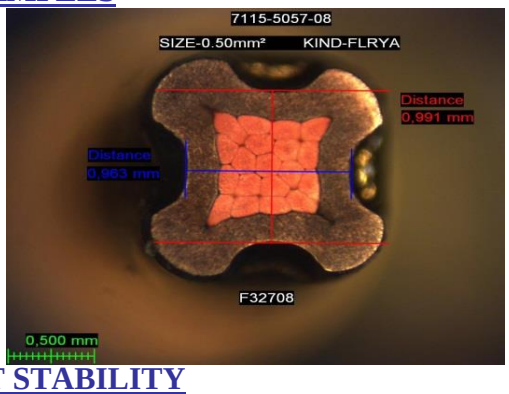
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**NA**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**NA**
	The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	Bend up and Bend down are within the criteria**(*)**	**NA**
	The exposed conductor is within the spec.(*)	**NA**
	The terminal is not bent sideway, look-king from the top**(*)**	**NA**
	The body of the terminal is not twisted**(*)**	**NA**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.85	0.85	4.57
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1	1.00	4.77
	+/-0.05		

REMARKS:

Aplicable wire range 0.35mm²~0.50mm²

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION

NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 2988	PREPARED (Operator) nº 18388
	Jitor Hugo	Helder Rocha
Date: 2020-jun-29	Date: 2020-jun-27	Date: 2020-jun-26

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
F32708

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.35 mm²

Nominal Cr. Height:	0.85	NA	mm
+/-	0.05	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.850	
2	0.851	
3	0.851	
4	0.851	
5	0.848	
6	0.849	
7	0.849	
8	0.851	
9	0.851	
10	0.849	
11	0.850	
12	0.850	
13	0.850	
14	0.851	
15	0.849	
16	0.852	
17	0.850	
18	0.849	
19	0.849	
20	0.850	
21	0.851	
22	0.851	
23	0.850	
24	0.852	
25	0.851	
26	0.851	
27	0.855	
28	0.853	
29	0.854	
30	0.855	
31	0.855	
32	0.854	
33	0.856	
34	0.857	
35	0.853	
36	0.855	
37	0.856	
38	0.857	
39	0.857	
40	0.859	
41	0.858	
42	0.857	
43	0.856	
44	0.859	
45	0.856	
46	0.857	
47	0.857	
48	0.857	
49	0.860	
50	0.859	
Average	0.85	
Cmk	4.57	

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.5 mm²

Nominal Cr. Height:	1	NA	mm
+/-	0.05	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.004	
2	1.004	
3	1.004	
4	1.006	
5	1.007	
6	1.004	
7	1.002	
8	1.005	
9	1.001	
10	1.004	
11	0.992	
12	1.004	
13	0.999	
14	1.000	
15	1.001	
16	1.006	
17	1.000	
18	1.000	
19	1.006	
20	1.003	
21	1.001	
22	1.001	
23	1.001	
24	1.004	
25	1.002	
26	1.004	
27	1.001	
28	1.005	
29	1.007	
30	1.003	
31	1.007	
32	1.008	
33	1.005	
34	1.001	
35	1.000	
36	1.001	
37	1.003	
38	0.999	
39	0.997	
40	1.006	
41	1.005	
42	1.002	
43	1.002	
44	1.006	
45	1.010	
46	1.005	
47	1.006	
48	1.008	
49	1.003	
50	1.009	
Average	1.00	
Cmk	4.77	

Acceptance criteria: Cmk>= 2.0

END