# QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

| CLIENT | MODEL | | S/N | MAP |
|---|---|---|---|---|
| YAZAKI SALTANO DE OVAR, P.E. LDA | RSY2275-JGF1_M | | L 76518 | |
| | Cod. KIT | K K006869 | | |
| ORDER | TERMINAL TO BE CRIMPED | | | A# |
| 5010993 | 7116-1909-02 | | | |

## APPLICATOR SETUP


| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| SETUP L.D.P. (mm.)= | 190,00 | STROKE | 40 ( mm ) | | MECAL | S.C. | S.T.M. | Note |
| Load Cal. ( Kg. ) = | 850 | | | Specification | | X | | |
| | | Setup | Fixing. Ref.▼ | Terminal Samples | | X | | |
| POSITIVE CAM (Terminal present) | | X | C | Wire Samples | | X | | |
| NEGATIVE CAM (Terminal absent) | | | | Housing Samples | | | | |
| | | | Fixing. Ref.▲ | Seal Samples | | X | | 7158-3213-90 |
| | | | | Applicounter | | | No | |
| | | | | Mobile Ejector | | | Yes | |
| | | | | Carrier strip to be cut | | | No | |
| | | | | Conform to Mecal norms | | | Yes | |
| | | | | Automatic machine | | | | |

| FEEDING POINT OF THE TERMINAL | | | | |
|---|---|---|---|---|
| Hole | Slot | Wire wing | Insulation wing | Other |
| X | | | | |

| | Crimp Height | Pull Force | Section | Photo |
|---|---|---|---|---|
| C | | | 1,00 | X |
| M | | | | |
| K | | | 0,50 | X |

| Setup on | | |
|---|---|---|
| | Mod. | S/N |
| Press | P107C | 42877 |
| Stripper | | |

Strip length = 4,50 ( mm )



## CRIMPING

| WIRE | INSULATION | BARREL |
|---|---|---|
|  F |  C | |
| Profile dimension<br>Wire C. Profile Width ( mm. ) 1,93 ( toll. + ) 0,02 | Profile dimension<br>Insulation C. Profile Width ( mm. ) 3,96 ( toll. + ) 0,02 | Profile dimension<br>Barrel C. Profile Width ( mm. ) ( toll. + ) |

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS ( mm. )

| SECTION | COMPOSITION | | Insulation | CONDUCTOR | | | | INSULATION | | | | BARREL | | | Pull Force | Crimp Force |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Required HEIGHT ± | Required WIDTH ± | Measured WIDTH | | Required HEIGHT ± | Required WIDTH ± | Measured WIDTH | Required HEIGHT ± | Required WIDTH ± | Measured WIDTH | | |
| mm² | Nb | Ø | Ø | Index Wire | 0,05 | 0,10 | | Index Insulation | 0,10 | 0,10 | | | | | Min. ( N. ) | C.F.A. ( KN. ) |
| 0,93 Sez. reale | | | | | | | | | | | | | | | | |
| 1,00 | 19 | 0,25 | 1,90 | 2,34 | 1,35 | 2,05 | 2,01 | 1,50 | 4,20 | 4,05 | 4,06 | | | | 175 | 3,15 |
| | | | | | | | | | | | | | | | | |
| 0,48 Sez. reale | | | | | | | | | | | | | | | | |
| 0,50 | 19 | 0,18 | 1,40 | 2,55 | 1,18 | 2,05 | 1,99 | 1,44 | 4,00 | 4,05 | 4,00 | | | | 80 | 3,64 |
| | | | | | | | | | | | | | | | | |

## CHECK




| Description | | Rif. | Test |
|---|---|---|---|
| Bent left or right (max) | 3° | A | OK |
| Bent up or down (max) | 3° | B | OK |
| Torsion (max) | 3° | C | OK |




| Description | | Rif. | Test |
|---|---|---|---|
| Bellmouth | ( 0.2-0.6 ) | D | OK |
| Cut-off (max) | 0,3 | E | OK |
| Wire overlay(min.) | 0,1 | F | OK |


| DATE | OPERATOR SIGNATURE | CONTROLLER SIGNATURE | QUALITY RESPONSIBLE |
|---|---|---|---|
| 10/12/2015 | *Amarotto* | *Toniato* | *Zatti* |

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

# QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

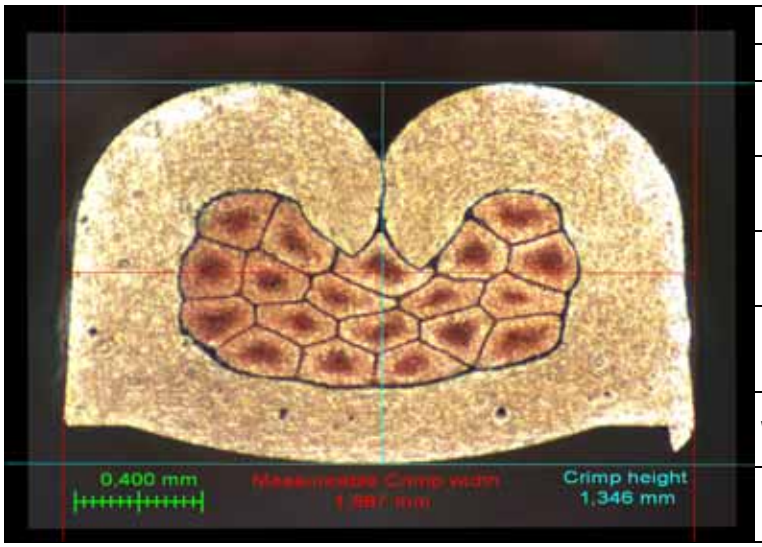YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSY2275-JGF1_M** | **76518**

| | Terminal |
|---|---|
| | 7116-1909-02 |
| Wire Section. | 1,00 |
| CH. ( mm. ) | |
| C.W. ( mm. ) | |
| Material Compression (%) | |
| Wire Compression | |
| Terminal Compression | |




| | Terminal |
|---|---|
| | 7116-1909-02 |
| Wire Section. | 1,00 |
| CH. ( mm. ) | 1,35 |
| C.W. ( mm. ) | 2,01 |
| Material Compression (%) | 21,2 |
| Wire Compression | |
| Terminal Compression | |


| | Terminal |
|---|---|
| | 7116-1909-02 |
| Wire Section. | 1,00 |
| CH. ( mm. ) | |
| C.W. ( mm. ) | |
| Material Compression (%) | |
| Wire Compression | |
| Terminal Compression | |

| DATE | OPERATOR SIGNATURE | CONTROLLER SIGNATURE | QUALITY RESPONSIBLE |
|---|---|---|---|
| 10/12/2015 | *Amarotto* | *Toniato* | *Zatti* |

# QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

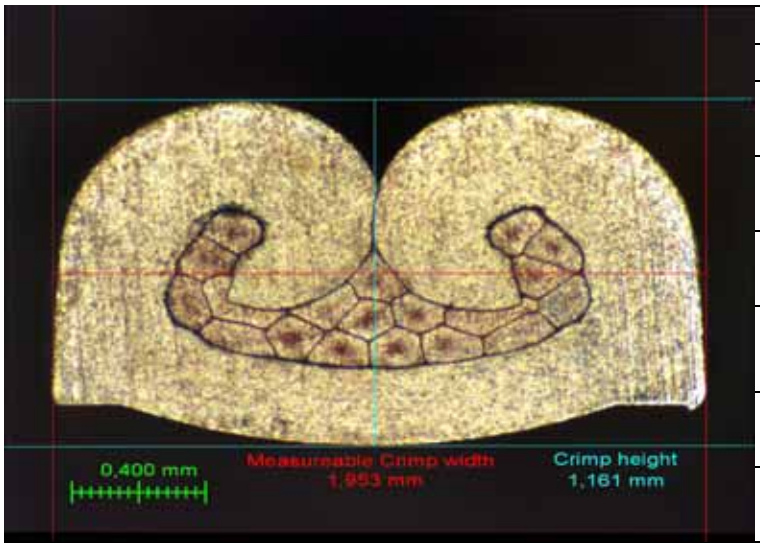YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSY2275-JGF1_M** | **76518**

| | Terminal |
|---|---|
| | 7116-1909-02 |
| Wire Section. | 0,50 |
| CH. ( mm. ) | |
| C.W. ( mm. ) | |
| Material Compression (%) | |
| Wire Compression | |
| Terminal Compression | |




| | Terminal |
|---|---|
| | 7116-1909-02 |
| Wire Section. | 0,50 |
| CH. ( mm. ) | 1,18 |
| C.W. ( mm. ) | 1,99 |
| Material Compression (%) | 20,5 |
| Wire Compression | |
| Terminal Compression | |

| | Terminal |
|---|---|
| | 7116-1909-02 |
| Wire Section. | 0,50 |
| CH. ( mm. ) | |
| C.W. ( mm. ) | |
| Material Compression (%) | |
| Wire Compression | |
| Terminal Compression | |

| DATE | OPERATOR SIGNATURE | CONTROLLER SIGNATURE | QUALITY RESPONSIBLE |
|---|---|---|---|
| 10/12/2015 | *Amarotto* | *Toniato* | *Zatti* |

| MECAL | DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST |
|---|---|

**DATA** 10/12/2015

**MODELLO**
**MODEL** **RSY2275-JGF1_M**
**TYPE**
**MODELE**

**TERMINALE**
**TERMINAL** **7116-1909-02**
**KONTAKT**
**COSSE**

**MATRICOLA**
**SERIAL NU** **L 76518**
**REGISTRIERNUMMER**
**MATRICULE**


| CODICE | Qt. | Rif |
|---|---|---|
| 870550004 | 1 | 110 |
| 601051006 | 2 | 130 |
| 600052010 | 1 | 150 |
| 911190000 | 1 | 160 |
| 911070012 | 1 | 170 |
| 650231018 | 1 | 180 |
| 630104106 | 1 | 190 |
| 990270004 | 1 | 200 |
| 991320002 | 1 | 210 |
| 600041106 | 1 | 220 |
| 991280007 | 1 | 230 |
| 991320001 | 1 | 240 |
| 610111308 | 1 | 250 |
| 911110013 | 1 | 260 |
| 991300008 | 1 | 280 |
| 870620001 | 1 | 295 |
| 880480008 | 1 | 300 |
| 871980007 | 1 | 310 |
| 990400003 | 1 | 315 |
| 600061016 | 2 | 360 |
| 601058012 | 1 | 370 |
| 600050010 | 1 | 380 |
| 640060020 | 2 | 390 |
| 991290010 | 1 | 400 |
| 991290016 | 1 | 405 |
| 600050014 | 4 | 410 |
| 640050020 | 1 | 420 |
| 600041008 | 1 | 450 |
| 650242004 | 2 | 460 |
| 991350000 | 1 | 480 |
| 600050016 | 2 | 490 |
| 600050010 | 1 | 500 |
| 991590000 | 1 | 510 |
| 911010006 | 1 | 520 |
| 991340002 | 1 | 530 |
| 991330003 | 1 | 540 |
| 991310000 | 1 | 560 |
| 640050020 | 1 | 570 |
| 600052010 | 1 | 580 |
| 911090007 | 1 | 590 |


| CODICE | Qt. | Rif |
|---|---|---|
| 95127 0207 | 1 | 001 |
| 60006 0040 | 1 | 005 |
| 91112 0035 | 1 | 100 |
| 99101 0039 | 1 | 120 |
| 95127 0046 | 1 | 140 |
| 91103 0045 | 1 | 290 |
| 91117 0053 | 1 | 320 |
| 91118 0184 | 1 | 330 |
| 60005 0035 | 1 | 340 |
| 99017 0019 | 1 | 343 |
| 91125 0074 | 1 | 350 |
| 88146 0018 | 1 | 355 |
| 88146 0019 | 1 | 362 |
| 60004 0008 | 4 | 365 |
| 91106 0000 | 1 | 430 |
| 91105 0018 | 1 | 440 |
| 99017 0000 | 1 | 470 |
| 91102 0001 | 1 | 550 |
| 91108 0050 | 1 | 600 |
| 91011 0000 | 2 | 610 |
| 91124 0228 | 1 | 620 |
| 91119 0003 | 1 | 621 |
| 99126 0028 | 1 | 622 |
| 91116 0025 | 1 | 623 |
| 91122 0008 | 1 | 630 |
| 60003 0006 | 2 | 640 |
| 91148 0361 | 1 | 650 |
| 91148 0382 | 1 | 655 |
| 91148 0383 | 1 | 655 |
| 63010 4104 | 2 | 665 |
| 60004 1012 | 2 | 660 |
| Personal. **L_H06-Y** | | |
| **98146 1129** | **1** | **1000** |
| **98145 1044** | **1** | **1010** |
| 99951 0460 | 1 | 1030 |
| 91130 0293 | 1 | 1040 |
| 60008 1025 | 1 | 1055 |
| **98127 1449** | **1** | **1060** |
| 60004 0010 | 1 | 1062 |
| **91134 0177** | **1** | **1070** |
| **91133 0174** | **1** | **1075** |
| 91035 0002 | 1 | 1080 |
| 20108 0061 | 1 | 1082 |
| 60003 0008 | 1 | 1085 |
| 60004 0016 | 4 | 1090 |
| 60003 0006 | 1 | 1093 |
| 91145 0025 | 1 | 1095 |
| 91141 0329 | 1 | 1096 |
| 60004 0010 | 1 | 1097 |
| 62104 0010 | 1 | 1098 |
| 91143 0039 | 1 | 1105 |
| 64002 0008 | 1 | 1110 |
| 91042 0000 | 1 | 1115 |
| 91145 0000 | 1 | 1120 |
| 91146 0000 | 1 | 1125 |
| 60004 0016 | 1 | 1130 |


**Mecal Srl**
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


# L_BLK00-RY

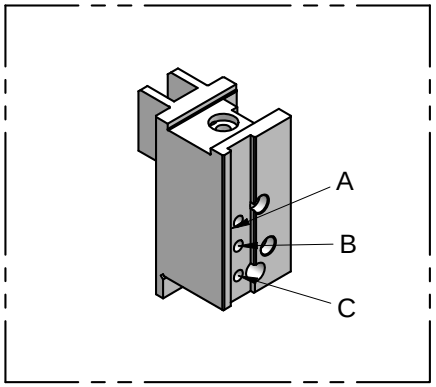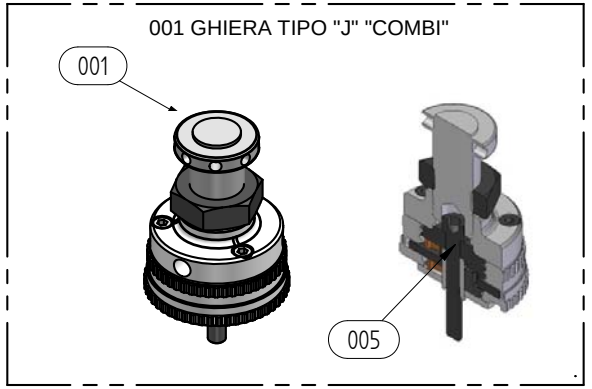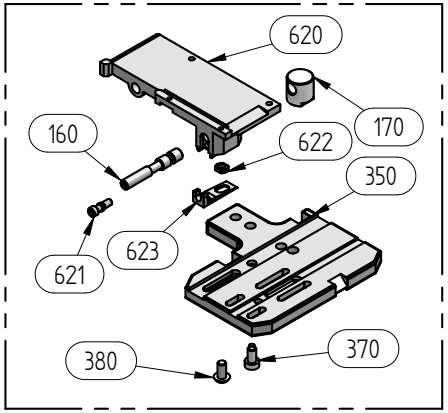
**ATTENZIONE:** la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
**ATTENTION:** the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

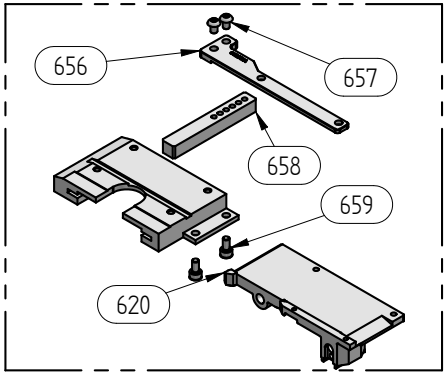






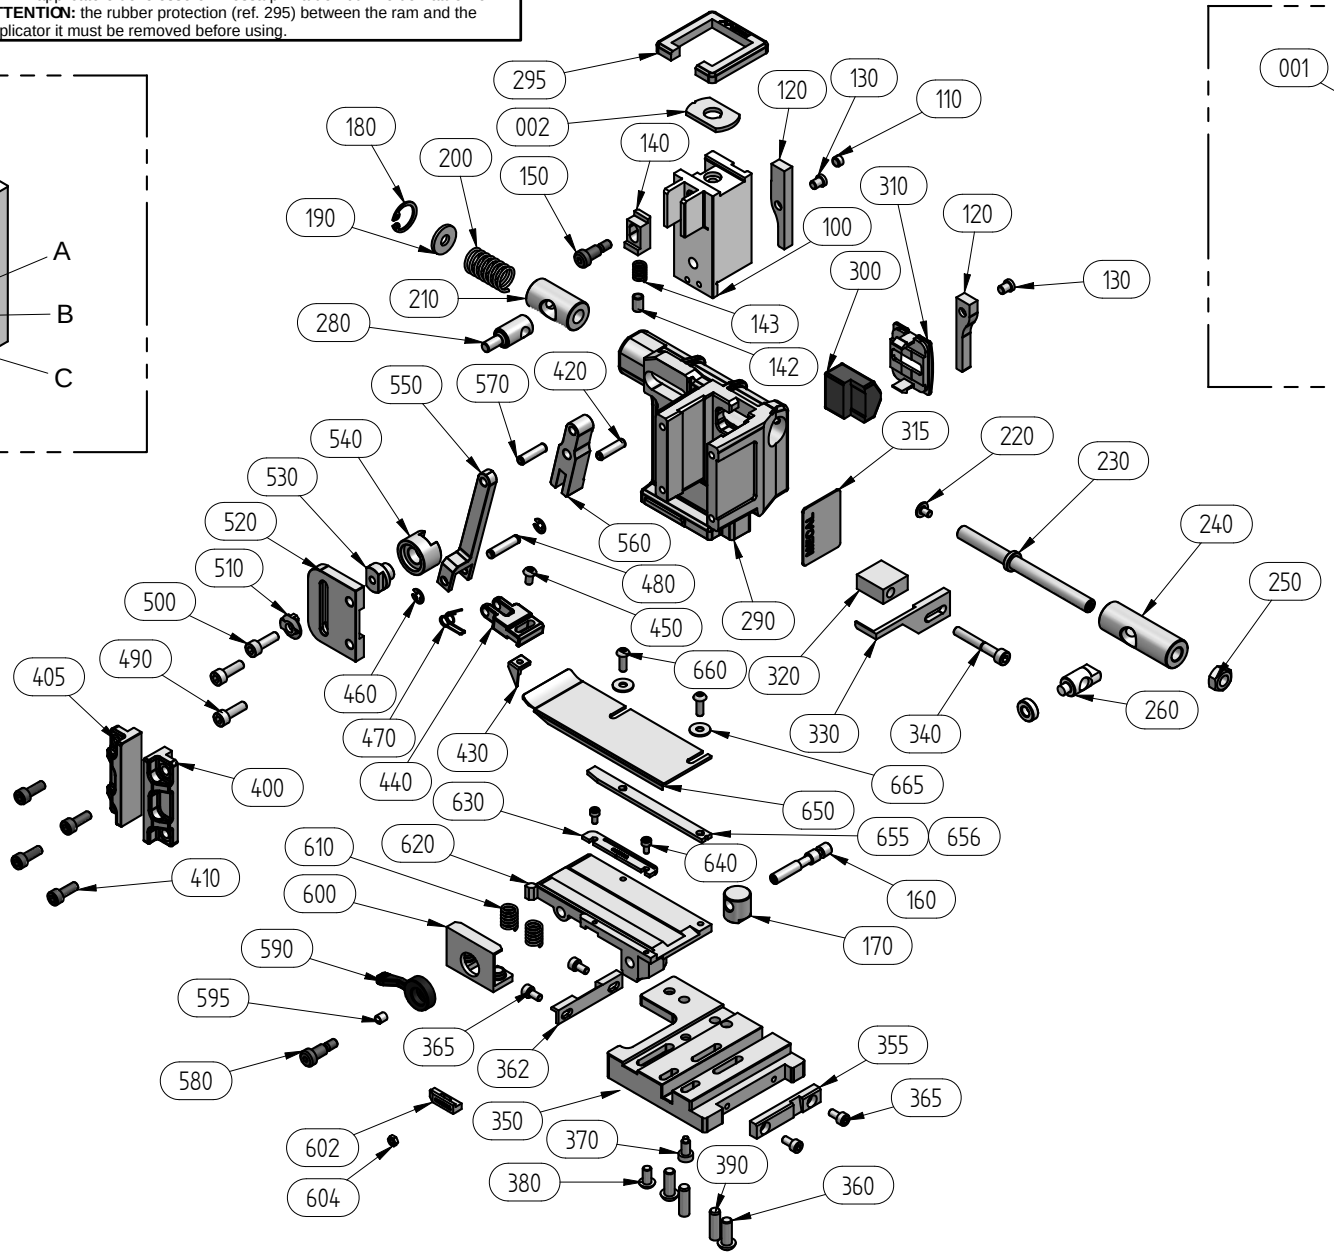



**Mecal Srl**
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

# L_H06-Y

