Mecal

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT YAZAKI SALTANO DE OVAR, P.E. LDA	**MODEL** RSY3364-JGE1 Cod. KIT K K012736	S/N L 78919	**MAP**
ORDER 5011990	**TERMINAL TO BE CRIMPED** 7116-4916-02		**A#**

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35	(mm)
Load Cal. (Kg.) =	850			

	Setup	Fixing. Ref.▼
POSITIVE CAM (Terminal present)	X	C
NEGATIVE CAM (Terminal absent)		B
		Fixing. Ref.▲

	MECAL	S.C.	S.T.M.	Note
Specification		X		
Terminal Samples		X		
Wire Samples		X		
Housing Samples				
Seal Samples		X		7157-3345-40
Applicounter			No	
Mobile Ejector			No	
Carrier strip to be cut			No	
Conform to Mecal norms			Yes	
Automatic machine				

FEEDING POINT OF THE TERMINAL

Hole	Slot	Wire wing	Insulation wing	Other
X				

CMK	Crimp Height	Pull Force	Section	Photo
C				
M				
K			0,50	X

Setup on	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = 4,00 (mm)



CRIMPING

WIRE		INSULATION		BARREL	
	F		C		
Profile dimension Wire C. Profile Width (mm.) 1,78	(toll. +) 0,02	Profile dimension Insulation C. Profile Width (mm.) 3,38	(toll. +) 0,02	Profile dimension Barrel C. Profile Width (mm.)	(toll. +)

WIRE CHARACTERISTICS

CRIMPING DIMENSIONS (mm.)

SECTION mm²	COMPOSITION Nb	COMPOSITION Ø	Insulation Ø	CONDUCTOR Index Wire	CONDUCTOR Required HEIGHT ± 0,05	CONDUCTOR Required WIDTH ±	CONDUCTOR Measured WIDTH	INSULATION Index Insulation	INSULATION Required HEIGHT ± 0,10	INSULATION Required WIDTH ±	INSULATION Measured WIDTH	BARREL Required HEIGHT ±	BARREL Required WIDTH ±	BARREL Measured WIDTH	Pull Force Toll. ± 2 % (N.)	Crimp Force C.F.A. (KN.)
0,93 Sez. reale 1,00 FLRYA	19	0,25	1,90	2,15	1,25		1,85	1,66	3,20		3,36				180	2,90
0,48 Sez. reale 0,50 FLRYA	19	0,18	1,50	2,38	1,05		1,83	1,66	3,00		3,31				90	3,34

CHECK



Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
17/6/2016	*Amarotto*	*Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA **WIRE** **RSY3364-JGE1** **78919**

Terminal	
7116-4916-02	
Wire Section.	0,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

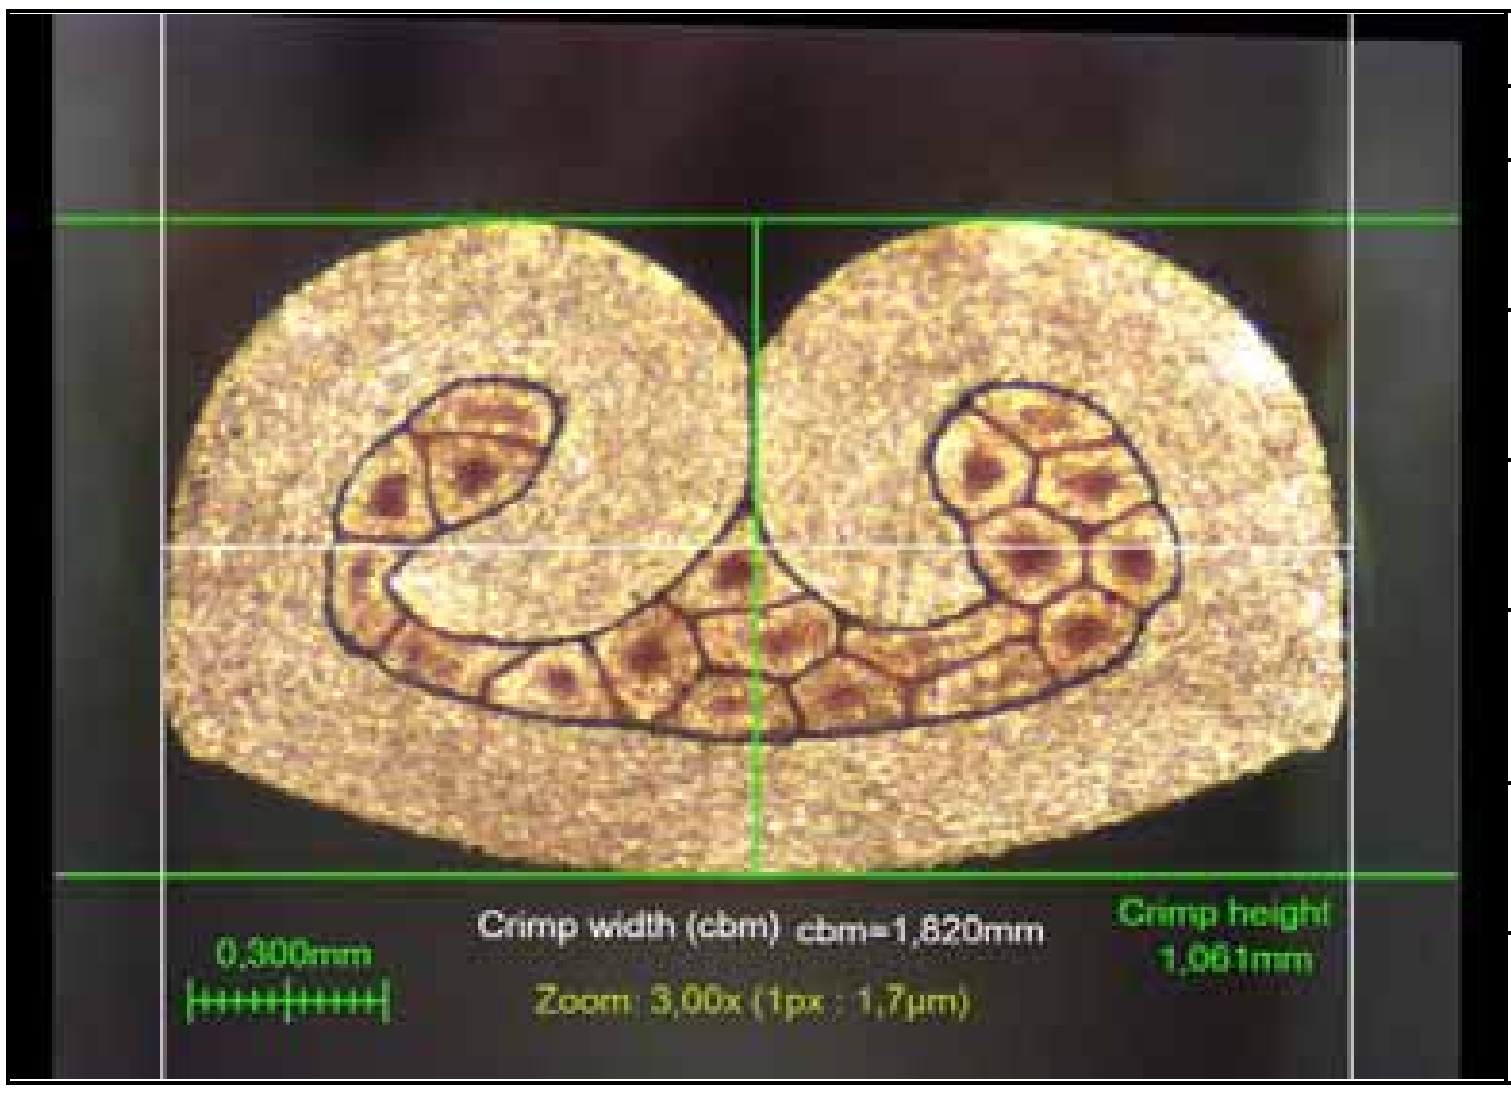
0,300mm
Crimp width (cbm) cbm=1,820mm
Zoom: 3,00x (1px : 1,7µm)
Crimp height
1,061mm

Terminal	
7116-4916-02	
Wire Section.	0,50
CH. (mm.)	1,05
C.W. (mm.)	1,83
Material Compression (%)	16,8
Wire Compression	
Terminal Compression	

Terminal	
7116-4916-02	
Wire Section.	0,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
17/6/2016	*Amarotto*	*Bruno*	*Zatti*

MECAL

DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 17/06/2016

MODELLO
MODEL **RSY3364-JGE1**
TYPE
MODELE

TERMINALE
TERMINAL **7116-4916-02**
KONTAKT
COSSE

MATRICOLA
SERIAL NU **L 78919**
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif	CODICE	Qt.	Rif
870550004	1	110	95127 0207	1	001
601051006	2	130	60006 0040	1	005
600052010	1	150	91112 0035	1	100
911190000	1	160	99101 0038	1	120
911070012	1	170	99101 0039	1	120
650231018	1	180	95127 0069	1	140
630104106	1	190	99157 0000	1	142
990270004	1	200	99058 0000	1	143
991320002	1	210	91103 0045	1	290
600041106	1	220	91117 0047	1	320
991280007	1	230	91117 0042	1	341
991320001	1	240	91118 0028	1	342
610111308	1	250	99017 0019	1	343
911110013	1	260	91125 0074	1	350
991300008	1	280	88146 0018	1	355
870620001	1	295	88146 0019	1	362
880480008	1	300	60004 0008	4	365
871980007	1	310	91106 0000	1	430
990400003	1	315	91105 0018	1	440
600061016	2	360	99017 0000	1	470
601058012	1	370	91102 0001	1	550
600050010	1	380	91108 0050	1	600
640060020	2	390	91011 0000	2	610
991290010	1	400	91124 0228	1	620
991290016	1	405	60004 0012	1	621
600050014	4	410	99126 0028	1	622
640050020	1	420	91116 0027	1	623
600041008	1	450	91122 0000	1	630
650242004	2	460	60003 0006	2	640
991350000	1	480	91148 0360	1	650
600050016	2	490	91148 0385	1	655
600050010	1	500	63010 4104	2	665
991590000	1	510	60004 1012	2	660
911010006	1	520	Personal. **L_H112-Y**		
991340002	1	530	**98146 0485**	**1**	**1000**
991330003	1	540	**98145 0446**	**1**	**1010**
991310000	1	560	99951 0380	1	1030
640050020	1	570	91130 0334	1	1040
600052010	1	580	99059 0005	1	1045
911090007	1	590	99155 0119	1	1050
			60008 1025	1	1055
			60004 0010	1	1058
			98127 0614	**1**	**1060**
			91134 0177	**1**	**1070**
			91133 0174	**1**	**1075**
			91035 0002	1	1080
			20108 0061	1	1082
			60003 0008	1	1085
			60004 0016	2	1090
			60003 0006	1	1093
			91145 0025	1	1095
			91141 0329	1	1096
			60004 0010	1	1097
			62104 0010	1	1098
			60004 0016	2	1100
			91143 0007	1	1105
			64002 0008	1	1110
			91042 0000	1	1115
			91145 0001	1	1120
			91146 0001	1	1125
			60004 0016	1	1130

REV	DATE	DESCRIPTION	REQUIRED	FITMENT