PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E026

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-1043 * SEQUENCE Nº 9










Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-1043-02	**7157-3035-60**	**MYDR**	**YSD-4514133446**	**AIMLER TRUCK B**

Applicable Terminals for this Tool:

7116-1043-02			

Anvil			Wire Crimper			Insulation Crimper		
7116-1043DDXA		(A)	7116-1043XW		(A)	7116-1043XID		(A1)
CW (c)	1,82	*CW (i)* 3,70	*CW*	1,80		*CW*	3,70	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
					O - ok **X** - ng **NA** - not aplicable		
	The two sides of the insulation grips are in the correct position.	**O**	0~0.20mm 0.20~0.50mm	0.14 0.43		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.30mm	0.10		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**O**	5º 5º	0.3 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.20~0.70mm	0.45		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	5º	0.2		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	5º	0.8		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	3,99
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 0.30mm²~0.50mm².

The wire size 0.35mm² is not recommended due to crimping microcut conditions.
Size 0.50mm² C/W(I)-3.76mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2024/dez/17	Date: 2024/dez/09	Date: 2024/dez/09

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E026

LOWER WIRE KIND & SIZE

Wire kind:	CAVS		
Wire size:	0,5		mm^2
Nominal Cr. Height:	1,05	3,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,058	3,700
2	1,050	3,694
3	1,056	3,695
4	1,051	3,704
5	1,057	3,704
6	1,056	3,708
7	1,051	3,701
8	1,054	3,707
9	1,057	3,709
10	1,049	3,704
11	1,055	3,708
12	1,053	3,711
13	1,054	3,712
14	1,058	3,707
15	1,056	3,709
16	1,051	3,706
17	1,062	3,705
18	1,054	3,710
19	1,056	3,707
20	1,062	3,705
21	1,061	3,709
22	1,051	3,711
23	1,059	3,707
24	1,059	3,704
25	1,052	3,706
26	1,049	3,710
27	1,060	3,711
28	1,052	3,707
29	1,052	3,710
30	1,052	3,710
31	1,051	3,704
32	1,050	3,704
33	1,054	3,711
34	1,057	3,705
35	1,051	3,704
36	1,057	3,711
37	1,055	3,711
38	1,049	3,707
39	1,046	3,704
40	1,048	3,711
41	1,056	3,711
42	1,058	3,703
43	1,050	3,707
44	1,050	3,710
45	1,056	3,706
46	1,058	3,703
47	1,052	3,704
48	1,051	3,716
49	1,057	3,704
50	1,053	3,712
Average	1,05	3,71
Cmk	3,99	7,46

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

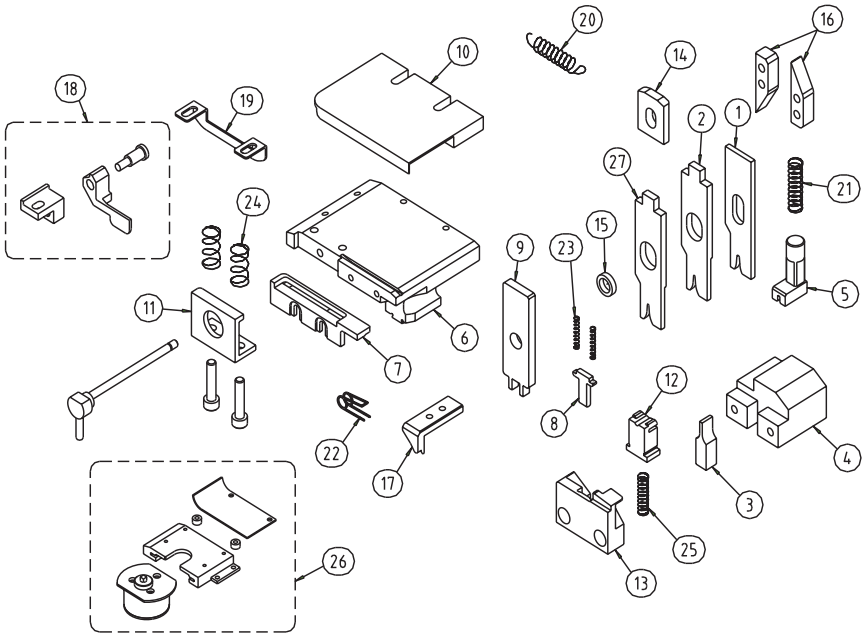
Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0240	TERMINAL No. 端子品番	7116-1043DD

Rev.1



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-1043XW		WIRE CRIMPER ワイヤークリンパー
2	7116-1043XID		INSULATION CRIMPER インシュレーションクリンパー
3	7116-1043XAD		ANVIL アンビル
4	7116-1043XJE		ANVIL HOLDER アンビルホルダー
5	7116-1043XYY		SUPPORTING STOPPER サポーティングストッパー
6	7116-1043XYB		BASE ベース
7	7116-1043XYH		TERMINAL GUIDEPLATE B ターミナルガイドプレートB
8	48A47016	101 ②	WIRE HOLDER 電線押さえ
9	48A47017	103 ②	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04	TERMINAL GUIDEPLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A19049	018 ②	SHEARBLADE シャーブレード
13	48A47025	005/102 ②	OUTER SHEARBLADE アウターシャーブレード
14	48A19007	012	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	021	BUSH ブッシュ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	005①	FEEDING CAM 送りカム
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-1043XKP		BRACKET ブラケット
27	-		~~STABILIZER CRIMPER スタビライザークリンパー~~
〈オプションOPTION〉			
14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED
②	5/13/2024	48A47016-002→48A47016-101 48A47017-003→48A47016-103 48A19049-001→48A19049-018 48A47025-001→48A47025-005	C24F006	S.KAWAMORI
①	4/25/2008	001→005	QX7	C,Sato

APPRICATION POST 申請部	DESIGNED 設計
HIB	
DESIGNED DATE 設計日	
4/6/2007	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
4/6/2007	4/6/2007

REVISED

ISSUE 6/10/2024 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED