PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E027

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151425 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1425-02	*	MXSR	4514204126	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7115-1425-02	7115-1425-04			

Anvil		
7115-1425XA		(N)
CW (c) 1.80	CW (i) 2.06	

Wire Crimper		
7115-1425XW		(1)
CW	1.78	

Insulation Crimper		
7115-1425XI		(1)
CW	2.06	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.5 mm 0.3 - 0.8 mm	0.05 0.46		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.24		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	0.5		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 1 mm	0.48		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	1.1		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 5 °	0.25		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

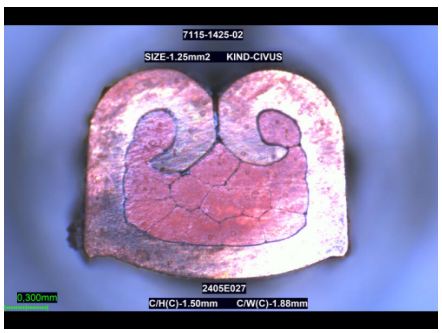

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.5	1.51	3.39
	+/- **0.05**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Applicable wire range-0.50~1.25mm2
The wire size 0.50/0.75/1.00mm² is not recommended due to crimping microcut conditions.

EVALUATION DECISION

SUITABLE	X
NOT SUITABLE	

FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 28/05/2025	Date: 23/05/2025	Date: 23/05/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2405E027

LOWER WIRE KIND & SIZE

C/W(I): 2.15 mm

Wire kind: CIVUS

Wire size: 1.25 mm²

Nominal Cr. Height:	1.5	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.504	2.216
2	1.510	2.193
3	1.507	2.201
4	1.498	2.206
5	1.510	2.211
6	1.504	2.195
7	1.501	2.195
8	1.510	2.198
9	1.514	2.205
10	1.509	2.200
11	1.512	2.195
12	1.510	2.206
13	1.503	2.196
14	1.505	2.203
15	1.504	2.204
16	1.510	2.210
17	1.510	2.213
18	1.505	2.213
19	1.506	2.197
20	1.512	2.194
21	1.505	2.206
22	1.512	2.204
23	1.504	2.199
24	1.508	2.203
25	1.513	2.204
26	1.517	2.200
27	1.512	2.202
28	1.512	2.201
29	1.508	2.199
30	1.502	2.195
31	1.512	2.197
32	1.504	2.205
33	1.508	2.197
34	1.504	2.193
35	1.511	2.208
36	1.514	2.200
37	1.509	2.205
38	1.511	2.191
39	1.515	2.207
40	1.507	2.205
41	1.509	2.191
42	1.514	2.202
43	1.507	2.207
44	1.508	2.201
45	1.514	2.211
46	1.502	2.193
47	1.505	2.208
48	1.504	2.190
49	1.506	2.217
50	1.508	2.201
Average	1.51	2.20
Cmk	3.39	4.98

UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4376	TERMINAL No. 端子品番	7115-1425

Common PN 共通品番	–	–	–	–
	–	–		

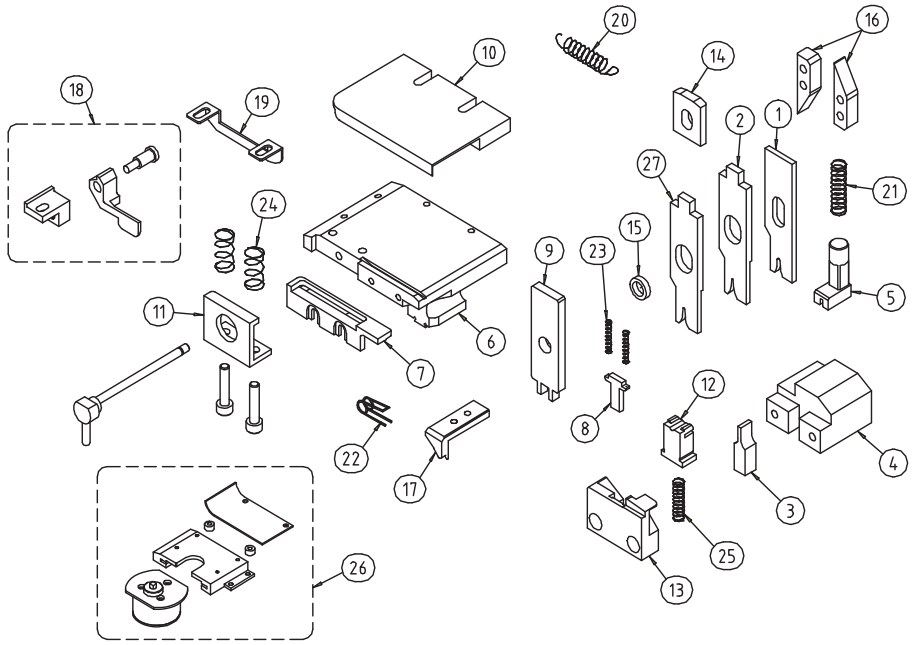

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1425XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7115-1425XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7115-1425XA		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7115-1425XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7115-1425XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7115-1425XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7115-1425XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7115-1425XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE シャープレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	001	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	026①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	021	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	DESIGNED 設計	ISSUED 発行
					接続技術部		
					DESIGNED DATE 設計日		
					2007/11/9		
					APPROVED 承認	DESIGNED 設計	
①	2009/7/14	023→026	09G-047	C,Abe	T,Maki	T,Suzuki	
					2007/11/9	2007/11/9	

ISSUE
2014/10/20
YAZAKI PARTS CO.,LTD HAIBARA OFFICE