PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2406E006

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7211-5188 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7211-5188-02	7157-3036-60	MXD	YSD-4514092419	MLER TRUCK BEV

Applicable Terminals for this Tool:

7211-5188	7211-5188-02			

Anvil		Wire Crimper		Insulation Crimper	
7211-5188XAD	(N)	7211-5188XW	(N)	7211-5188XID	(N)
CW (c) 1,37	*CW (i)* 2,80	*CW* 1,35		*CW* 2,80	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
						O - ok X - ng NA - not aplicable	
	The two sides of the insulation grips are in the correct position.	O	~mm 0.10~0.40mm	0.08 0.31		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0~0.30mm	0.19		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	0~0.25mm 0~0.25mm	0.08 -		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.10~0.70mm	0.43		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	No Standard	0.8		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	0~0.20mm	0.09		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

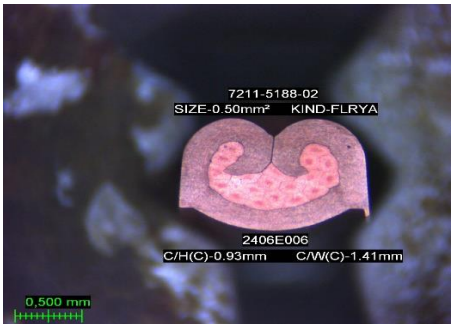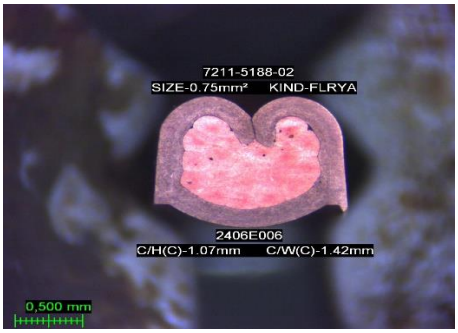2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	0,93	0,93	2,27	mm	1,07	1,07	3,34
	+/-0.03				**+/-0.05**		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².
Size 0.50mm² C/W(I)-2.84mm
Size 0.75mm² C/W(I)-2.86mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2024/jul/08	Date: 2024/jun/28	Date: 2024/jun/24

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2406E006

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm^2

Nominal Cr. Height:	0,93	2,9	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,936	2,918
2	0,932	2,903
3	0,934	2,911
4	0,938	2,911
5	0,940	2,903
6	0,934	2,900
7	0,932	2,897
8	0,929	2,909
9	0,935	2,899
10	0,929	2,909
11	0,927	2,911
12	0,935	2,901
13	0,928	2,904
14	0,935	2,908
15	0,934	2,899
16	0,926	2,909
17	0,933	2,907
18	0,930	2,899
19	0,933	2,907
20	0,925	2,910
21	0,930	2,902
22	0,925	2,900
23	0,930	2,899
24	0,933	2,908
25	0,934	2,910
26	0,929	2,899
27	0,934	2,901
28	0,938	2,912
29	0,938	2,910
30	0,928	2,903
31	0,936	2,904
32	0,931	2,902
33	0,928	2,909
34	0,937	2,903
35	0,937	2,908
36	0,936	2,914
37	0,939	2,914
38	0,937	2,905
39	0,932	2,914
40	0,936	2,903
41	0,937	2,900
42	0,936	2,914
43	0,930	2,915
44	0,931	2,904
45	0,939	2,904
46	0,937	2,913
47	0,930	2,913
48	0,930	2,905
49	0,937	2,902
50	0,936	2,912
Average	0,93	2,91
Cmk	2,27	5,81

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm^2

Nominal Cr. Height:	1,07	2,9	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,078	2,908
2	1,067	2,904
3	1,072	2,911
4	1,073	2,914
5	1,067	2,902
6	1,064	2,902
7	1,073	2,907
8	1,077	2,906
9	1,069	2,902
10	1,066	2,903
11	1,076	2,911
12	1,071	2,906
13	1,078	2,910
14	1,080	2,910
15	1,072	2,901
16	1,076	2,904
17	1,075	2,901
18	1,070	2,908
19	1,070	2,908
20	1,077	2,900
21	1,071	2,908
22	1,073	2,901
23	1,078	2,900
24	1,070	2,905
25	1,065	2,910
26	1,067	2,901
27	1,077	2,903
28	1,078	2,907
29	1,067	2,904
30	1,066	2,899
31	1,071	2,908
32	1,064	2,908
33	1,065	2,908
34	1,076	2,907
35	1,072	2,911
36	1,067	2,901
37	1,078	2,900
38	1,071	2,904
39	1,068	2,901
40	1,076	2,908
41	1,081	2,907
42	1,071	2,900
43	1,069	2,905
44	1,080	2,911
45	1,077	2,903
46	1,072	2,903
47	1,076	2,911
48	1,078	2,903
49	1,076	2,901
50	1,069	2,887
Average	1,07	2,90
Cmk	3,34	6,86

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5702	TERMINAL No. 端子品番	7211-5188 DD
共通品番	– –	– –	– –

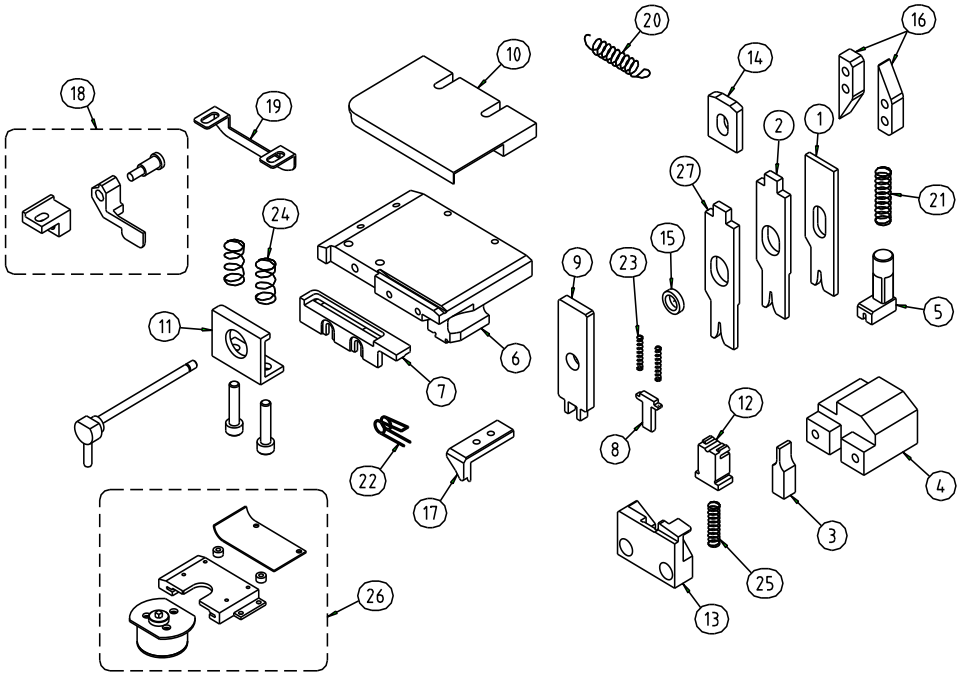

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7211-5188XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7211-5188XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7211-5188XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7211-5188XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7211-5188XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7211-5188XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7211-5188XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7211-5188XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7211-5188XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-019	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	-023	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-003	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署		
YWTS		
DESIGNED DATE 設計日		
07-05-2013		
APPROVED 承認	DESIGNED 設計	ISSUED 発行
T,Maki	C.Almeida	
07-05-2013	07-05-2013	