PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2406E008

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7211-5188 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7211-5188-02	7157-3036-60	MYD	YSD-4514092419	MLER TRUCK BEV

Applicable Terminals for this Tool:

7211-5188	7211-5188-02			

Anvil		Wire Crimper		Insulation Crimper	
7211-5188XAD	(N)	7211-5188XW	(N)	7211-5188XID	(N)
CW (c) 1,37	*CW (i)* 2,80	*CW* 1,35		*CW* 2,80	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
						O - ok X - ng NA - not aplicable	
	The two sides of the insulation grips are in the correct position.	O	~mm 0.10~0.40mm	0 0.35		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0~0.30mm	0.23		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	0~0.25mm 0~0.25mm	0.08 -		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.10~0.70mm	0.51		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	No Standard	0.6		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	0~0.20mm	0.10		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

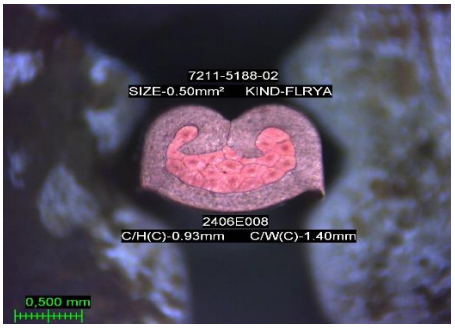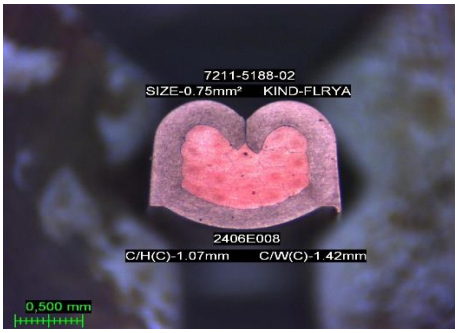2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,93	0,94	2,63
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1,07	1,07	3,06
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².
Size 0.50mm² C/W(I)-2.84mm
Size 0.75mm² C/W(I)-2.86mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2024/jul/08	Date: 2024/jun/28	Date: 2024/jun/24

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2406E008

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm^2

Nominal Cr. Height:	0,93	2,9	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,930	2,903
2	0,935	2,899
3	0,932	2,905
4	0,927	2,907
5	0,926	2,900
6	0,932	2,907
7	0,935	2,910
8	0,929	2,903
9	0,931	2,909
10	0,936	2,905
11	0,932	2,900
12	0,937	2,907
13	0,934	2,907
14	0,938	2,902
15	0,936	2,899
16	0,937	2,908
17	0,938	2,909
18	0,936	2,899
19	0,938	2,898
20	0,939	2,908
21	0,938	2,908
22	0,940	2,901
23	0,940	2,903
24	0,936	2,908
25	0,934	2,908
26	0,939	2,902
27	0,940	2,911
28	0,937	2,904
29	0,937	2,902
30	0,936	2,904
31	0,935	2,909
32	0,934	2,910
33	0,936	2,902
34	0,937	2,897
35	0,934	2,904
36	0,934	2,909
37	0,939	2,903
38	0,939	2,899
39	0,934	2,902
40	0,937	2,905
41	0,936	2,907
42	0,936	2,899
43	0,937	2,907
44	0,933	2,910
45	0,937	2,900
46	0,934	2,897
47	0,937	2,907
48	0,935	2,909
49	0,937	2,902
50	0,936	2,899
Average	0,94	2,90
Cmk	2,63	7,93

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm^2

Nominal Cr. Height:	1,07	2,9	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,073	2,902
2	1,070	2,909
3	1,072	2,904
4	1,070	2,908
5	1,074	2,910
6	1,069	2,904
7	1,074	2,904
8	1,067	2,912
9	1,067	2,903
10	1,071	2,901
11	1,070	2,902
12	1,065	2,898
13	1,069	2,904
14	1,074	2,906
15	1,065	2,899
16	1,065	2,900
17	1,074	2,905
18	1,066	2,899
19	1,065	2,895
20	1,077	2,902
21	1,068	2,905
22	1,076	2,901
23	1,078	2,896
24	1,077	2,901
25	1,078	2,905
26	1,079	2,907
27	1,079	2,901
28	1,070	2,900
29	1,073	2,907
30	1,079	2,906
31	1,080	2,903
32	1,071	2,910
33	1,079	2,908
34	1,082	2,902
35	1,078	2,907
36	1,072	2,912
37	1,079	2,912
38	1,076	2,905
39	1,076	2,902
40	1,083	2,912
41	1,072	2,914
42	1,076	2,914
43	1,082	2,902
44	1,074	2,902
45	1,071	2,907
46	1,079	2,911
47	1,081	2,913
48	1,078	2,903
49	1,071	2,900
50	1,078	2,902
Average	1,07	2,90
Cmk	3,06	6,75

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5702	TERMINAL No. 端子品番	7211-5188 DD
共通品番	– –	– –	– –

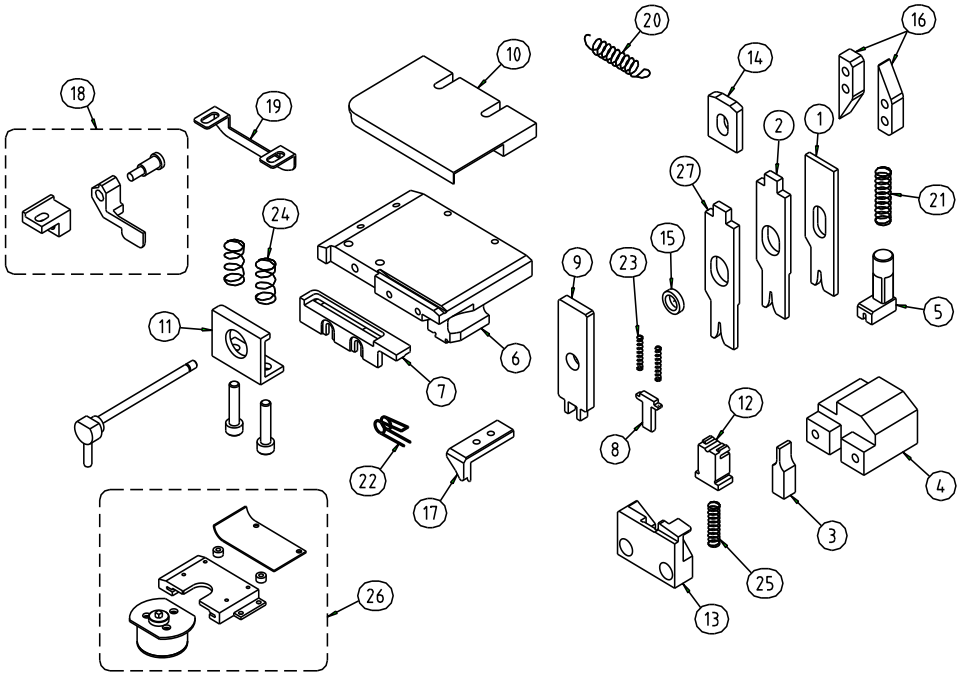

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7211-5188XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7211-5188XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7211-5188XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7211-5188XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7211-5188XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7211-5188XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7211-5188XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7211-5188XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7211-5188XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-019	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	-023	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-003	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署		
YWTS		
DESIGNED DATE 設計日		
07-05-2013		
APPROVED 承認	DESIGNED 設計	ISSUED 発行
T,Maki	C.Almeida	
07-05-2013	07-05-2013	