PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2407E009

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-4158 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4158-02	*	**MYC**	**YSD 4514105424**	**IMLER TRUCK B**

Applicable Terminals for this Tool:

7116-4158-02	**7116-4158-06**			

Anvil		Wire Crimper		Insulation Crimper	
7116-4158XA	(N)	7116-4158XW	(1)	7116-4158XI	(2)
CW (c) 3,22	*CW (i)* 3,90	*CW* 3,20		*CW* 3,90	

1 - VISUAL / MEASURED CHECK ITEMS

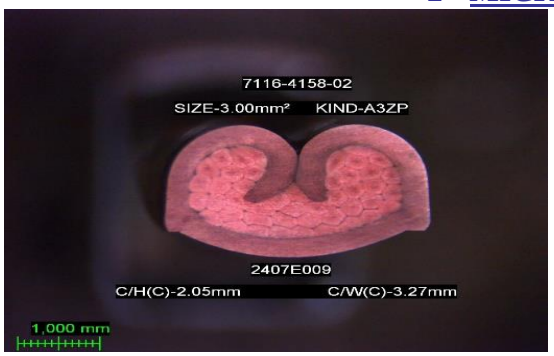
			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0.00~0.50mm 0.30~0.90mm	-- 0.52		The Bell Mouth is within the spec.**(*)**	O
	Not found any Bell Mouth in the insulation area.	O	0.00~0.30mm	0.10		The dimension of the cutting carrier is within the spec.**(*)**	O
	The lance height and shape are not deformed.	O	0.00~0.30mm 0.00~0.30mm	0.08 --		Bend up and Bend down are within the criteria**(*)**	O
	Not found any burr in the cutting carrier.	O	0.10~0.70mm	0.67		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.5		The terminal is not bent sideway, look-king from the top**(*)**	O
	The wire barrel is free from major burrs.	O	3º	0.1		The body of the terminal is not twisted**(*)**	O

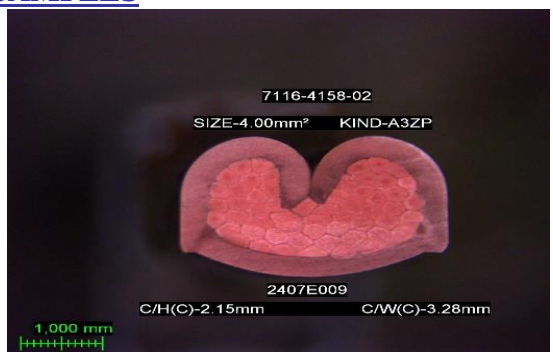
(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,05	2,05	7,15
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	2,15	2,15	7,55
	+/-0.05		

REMARKS:

Aplicable wire range 3.00mm²~4.00mm²
SIZE-3.00mm² C/W(I)-4.00mm
SIZE-4.00mm² C/W(I)-4.05mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 8124	PREPARED (Operator) nº 18388
		
Date: 2024/set/02	Date: 2024/ago/23	Date: 2024/ago/22

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2407E009

LOWER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 3 mm²

Nominal Cr. Height:	2,05	3,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,049	3,702
2	2,054	3,701
3	2,051	3,705
4	2,055	3,704
5	2,051	3,701
6	2,053	3,705
7	2,051	3,698
8	2,049	3,701
9	2,053	3,707
10	2,048	3,704
11	2,054	3,698
12	2,053	3,704
13	2,051	3,701
14	2,051	3,707
15	2,055	3,702
16	2,048	3,705
17	2,051	3,702
18	2,054	3,701
19	2,053	3,698
20	2,051	3,704
21	2,049	3,705
22	2,048	3,704
23	2,054	3,707
24	2,053	3,705
25	2,048	3,702
26	2,049	3,698
27	2,051	3,702
28	2,049	3,701
29	2,049	3,702
30	2,051	3,708
31	2,049	3,704
32	2,051	3,705
33	2,055	3,702
34	2,048	3,702
35	2,051	3,698
36	2,053	3,707
37	2,055	3,702
38	2,051	3,708
39	2,053	3,708
40	2,049	3,702
41	2,048	3,704
42	2,049	3,707
43	2,051	3,705
44	2,049	3,707
45	2,053	3,704
46	2,048	3,702
47	2,049	3,701
48	2,049	3,707
49	2,054	3,698
50	2,049	3,704
Average	2,05	3,70
Cmk	7,15	11,14

UPPER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 4 mm²

Nominal Cr. Height:	2,15	4	mm
+/-	0,05	0,1	mm

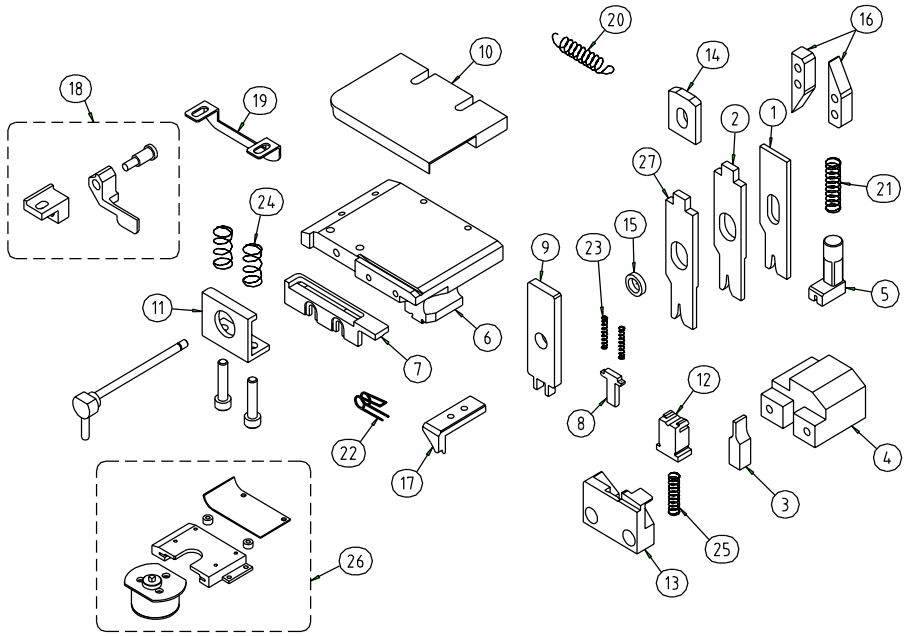
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,153	4,003
2	2,151	4,008
3	2,153	3,998
4	2,149	4,003
5	2,153	4,006
6	2,155	4,003
7	2,153	4,005
8	2,150	4,003
9	2,153	4,007
10	2,149	4,007
11	2,153	4,003
12	2,151	4,008
13	2,149	4,003
14	2,153	3,998
15	2,154	4,005
16	2,150	4,008
17	2,155	4,005
18	2,153	4,003
19	2,149	4,007
20	2,154	4,003
21	2,153	4,006
22	2,149	4,005
23	2,153	4,003
24	2,151	4,005
25	2,153	4,005
26	2,155	4,007
27	2,149	4,008
28	2,153	3,998
29	2,150	4,003
30	2,149	4,003
31	2,154	4,008
32	2,155	4,007
33	2,149	4,003
34	2,153	4,003
35	2,151	4,008
36	2,153	4,003
37	2,150	4,007
38	2,149	4,006
39	2,154	4,008
40	2,155	4,007
41	2,155	4,003
42	2,153	4,003
43	2,149	3,998
44	2,153	4,005
45	2,150	4,003
46	2,155	4,005
47	2,151	4,007
48	2,149	4,005
49	2,151	4,003
50	2,153	4,003
Average	2,15	4,00
Cmk	7,55	11,80

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1501	TERMINAL No. 端子品番	7116-4158
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4158XW		WIRE CRIMPER ワイヤークリンパー
2	7116-4158XI		INSULATION CRIMPER インシュレーションクリンパー
3	7116-4158XA		ANVIL アンビル
4	7116-4158XJE		ANVIL HOLDER アンビルホルダー
5	7116-4158XYY		SUPPORTING STOPPER サポーティングストッパー
6	7116-4158XYB		BASE ベース
7	7116-4158XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	002	SHEARBLADE シャーブレード
13	48A47025	002	OUTER SHEARBLADE アウターシャーブレード
14	48A19007	016①	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	033	BUSH ブッシュ
16	48A47014	005①	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7116-4158XKP		BRACKET ブラケット
27			~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	101	OUTER SHEARBLADE アウターシャーブレード
14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	2008/8/1	020→016 001→005	QX7	C,Sato

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2008/3/27	
APPROVED 承認	DESIGNED 設計
T,Maki	C,Sato
2008/3/27	2008/3/27

ISSUED 発行

ISSUE
2018/03/22
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.